

davide groppi

HANDBOOK 2024 - CCC

INDEX

WIRELESS	13	SUSPENSION	101	SYSTEMS	223
35MM	15	CATHODE	103	FLASH	225
BUGIA	19	LOUIS XIV	109	INFINITO	241
PoPuP	23	MAGIA	113	OHM	253
POST PRANDIUM	27	MISS	123	UTOPIA	261
TeTaTeT	33	MOON	127		
TeTaTeT Flûte	39	NEURO	135	TRACKS - PROFILES	267
VIS À VIS	43	REFLEX S	139	BINARIO TRIFASE	269
		SHANGHAI	143		
TABLE	47	SIMBIOSI	147	OUTDOOR	277
ANIMA	49	SOTTILE	151	BELLADINOTTE	279
CALVINO	53	SOTTOSOPRA	155	BUBKA	283
FM	57			BUBKA BOLLARD	287
MOON T	61	WALL	159	BUIO - TRIMLESS	292
MORSETTO	67	DOT P	161	BUIO - TRIM	296
PIGRECO	73	EDISON'S NIGHTMARE	165	BUIO - SPOT	300
		FILM	169	GRILLO	307
FLOOR	77	MIRA	173	IMU	311
MASAI	79	MIRA MAGNETIC	177	NEURO OUTDOOR	315
MOON F	85	MORSETTO P	181	NUIT	319
ORIGINE	89	RAIL	185	ORIGINE OUTDOOR	323
SAMPEI	95	REFLEX	189	Q²	327
		TOAST	193	SAMPEI 440 OUTDOOR	331
		CEILING	197		
		ASINTOTO	199	BULBS	335
				DRIVERS	337
		RECESSED	203	COMMON ACCESSORIES	341
		DOT R	205	SUSPENSION KITS	342
		MIRA R	209		
		NULLA	213		

Our codification system consists of a fifteen-digit structure defined as follows:

1	A	3	0	0	0	3	0	0		2	7		0	0
PRODUCT FAMILY					FINISH		INTERNAL USE ONLY		-	COLOUR TEMPERATURE		-	ELECTRIFICATION	

The Davide Groppi handbook is a confidential document and cannot be disclosed. In this document the drawings and technical information are to be considered indicative. All product features and technical measurements are available on our website davidegropi.com

Finish

0	0	Standard
0	1	Polished Chrome
0	3	Matt White
0	4	Matt Black
0	8	Brushed Brass
1	0	Stainless Steel
1	3	Black Brushed Stainless Steel
1	4	Brushed Chrome
1	5	Natural Brass
1	8	Matt Gold
1	9	Polished Gold
2	6	Total Black
2	7	Gravity Black
2	8	Polished Black Chrome
2	9	Brushed Bronze
3	2	Copper Oxide
3	4	Matt White - Black Bicolour
3	6	Brushed Black
3	8	Blasted Inox

Colour temperature

0	0	Light source not included
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700K / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

Electrification





0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

General data on the product

Mounting - Lighting - Use - Material - Finish - Note

Model specifications









Technical data - Certifications - Codes

NULLA		Davide Groppi / 2010	
Recessed / Direct / Indoor			
Material	Metal		
Finish	.00 Standard		
Note	Recessed luminaire. Visible 18/25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance. Apparecchio illuminante da incasso. Foro visibile con diametro di 18/25 mm. NULLA 18 e NULLA 25: apparecchio estraibile per manutenzione.		
	NULLA - 23' 14W 24V DC 2700K - 425lm / 3000K - 458lm CRi >90 Beam 23° UGR <19 Driver not included CE 	Standard - 2700K Standard - 3000K	1A410000.27.20 1A410000.30.20
	NULLA - 32' 14W 24V DC 2700K - 538lm / 3000K - 579lm CRi >90 Beam 32° UGR <19 Driver not included CE 	Standard - 2700K Standard - 3000K	1A210000.27.20 1A210000.30.20

Compulsory and optional accessories

Accessories finishes and specifications - Codes

Reference model

NULLA		Davide Groppi / 2010	
Compulsory accessories / Accessori obbligatori			
Installation kits / Kit d'installazione			
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm	NULLA	Not included
	Matt Black Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	1A2200400.00.00	
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm	NULLA 18	Not included
	Matt Black Cut-out Ø 22 mm Minimum space for mounting 190 mm	1A2210400.00.00	
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm	NULLA 25	Not included
	Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	1A2170400.00.00	
	Plasterboard flange 12,5 mm / Flangia per cartongesso 12,5 mm	NULLA 25	Not included
	Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	1A3980400.00.00	
	Plasterboard flange (bottom) = 12,5 mm / Flangia (da sotto) per cartongesso = 12,5 mm	NULLA 25	Not included
	Matt Black Cut-out Ø 35 mm Minimum space for mounting 190 mm IP65	1A4960400.00.00	
Drivers / Alimentatori			
	Driver / Alimentatore	Not included	
	220-240V(100-127V) 24V/16W(15W)IP20/DALI	12024180.24	
	Driver / Alimentatore	Not included	
	220-240V(100-127V) 24V/20W(15W)IP20/PUSH	120240870.24	
	Driver / Alimentatore	Not included	
	220-240V 24V/20W/IP20/TRIAC/IGBT	120240850.24	



Class II appliance: appliance whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.



Class III appliance: appliance whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the appliance is powered by a SELV safety transformer/driver in compliance with legislation in force. The appliance must not be connected to ground conductors.



Degree of protection against access of foreign bodies, dust and water.



Appliance with this symbol can only use low pressure bulbs or bulbs with safety glass.



Do not use cold light lamps.



To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the appliance to the closest lighting object.



Color Rendering Index: the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.



The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the delivered lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.



Luminaire designed to be powered by ENDLESS conductive tape.



Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.



Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR* <19).


All Davide Groppi products, except those specifically indicated,
are equipped with electronic light sources (LED).
The selection of diodes is carried out with the utmost care to guarantee
the highest levels of performance and luminous uniformity.

WIRELESS

35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Those dear old slides. Nobody pays any attention to them anymore.
It's the smallest lamp in our collection.
It's an idea, a thought, a pendant, something you can wear.
The pulsating light and the images you choose to display on it
make 35MM unique and exceptional.

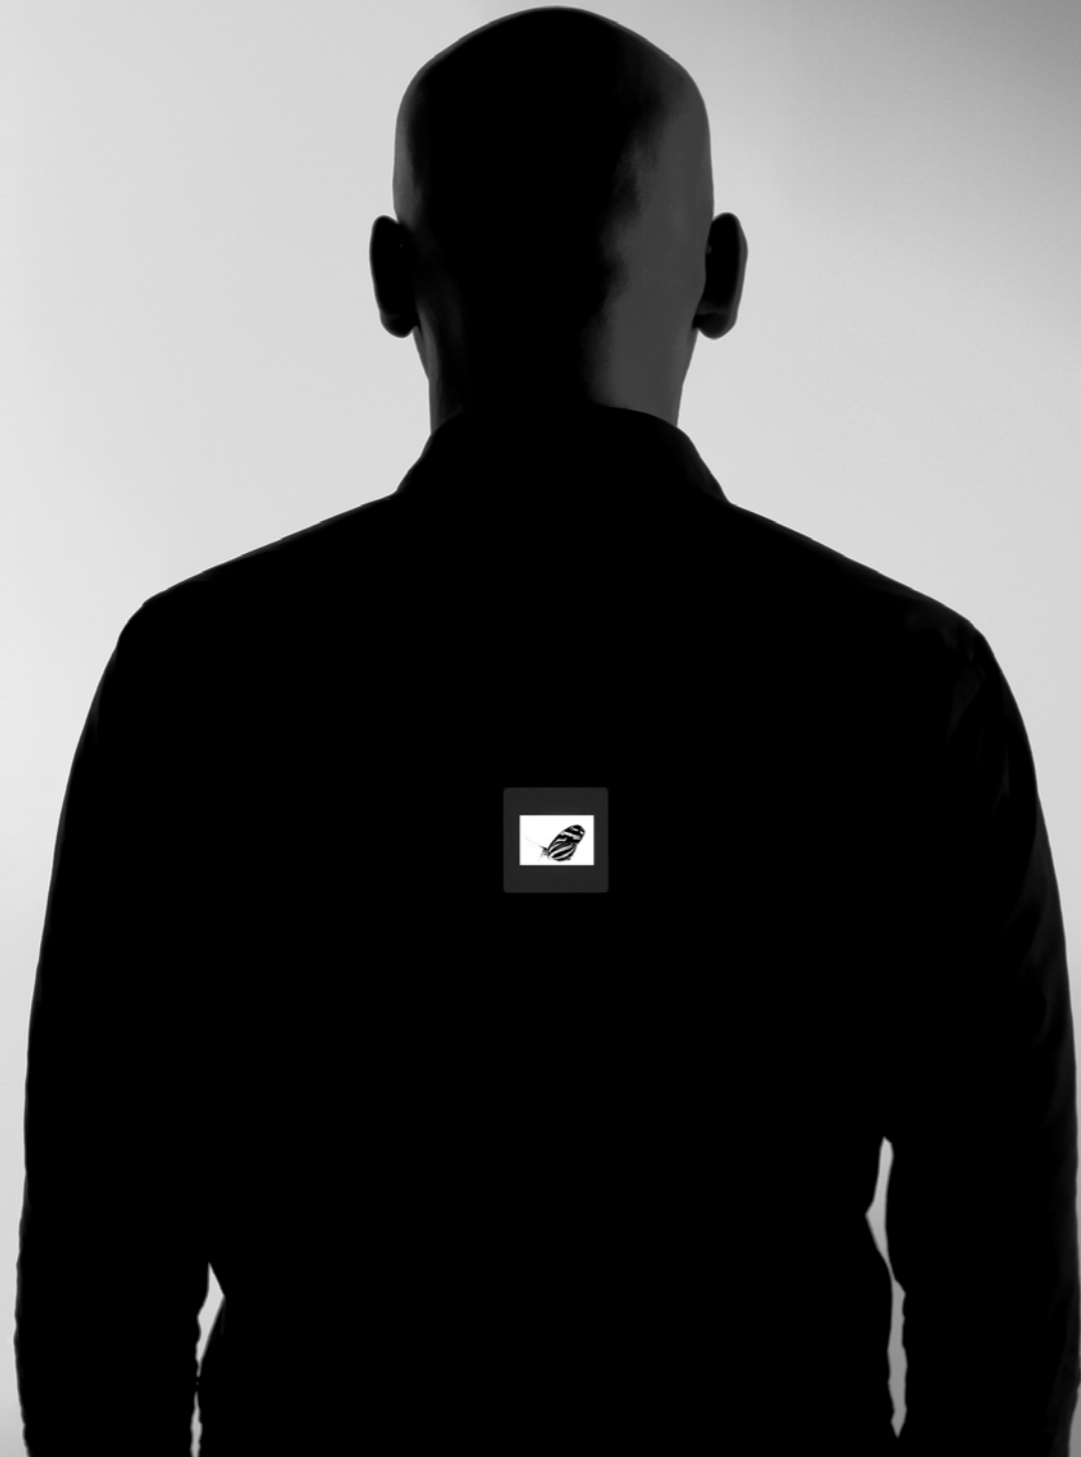


35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Objects / Diffuse / Wireless

Material Metal - Polycarbonate
Finish .00 Standard


Note Battery-operated wearable luminaire. Matt white front. Glossy black back. Customised image not included. Intermittent light.



35MM
0,3W
ON/OFF
Batteries 2xCR2032 included
CE IP20

Standard - ON/OFF

|1A2640000.00.00 |

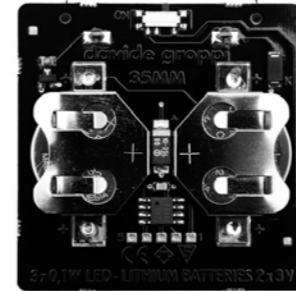

BUGIA

Davide Groppi / 2018



A lightweight and soft light.
A lamp designed to enjoy wonderful diffuse light but without an electrical cable.


BUGIA

Davide Groppi / 2018

Table / Diffuse / Wireless

Material Metal - Methacrylate
Finish .18 Matt Gold

Note Chargeable table luminaire. Matt white diffuser. Gold finish base. Battery life: 9 hours.



BUGIA


2W
3000K - 120lm
CRI >90
ON/OFF
Driver with plug not included
USB cable included
◆ IP20

Matt Gold - 3000K - ON/OFF

| 1A2351808.30.00 |


Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132



PoPuP

Daide Groppi / 2016



Light*Music*Wireless

Created to give you both light and music any place, at any time.

PoPuP accompanies you during your unforgettable moments.

The sounds it produces are dynamic and of excellent quality.

Light and sound can also be enjoyed separately.

Listen to the light.


PoPuP

Davide Groppi / 2016

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Chargeable table luminaire and speaker. Magnetic fixing stem. Battery life: 12 hours light only and 30 hours audio only at medium volume.

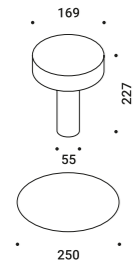

PoPuP


2W
 3000K - 183lm
 CRI >80
 ON/OFF
 5W Audio - 50-20000Hz
 Driver with plug included
 IP20

Matt White - 3000K - ON/OFF

1A2610308.30.00


Optional accessories

Drivers



Driver	Not included
Input 110-240V - 50/60Hz Output 14V DC - 0,3A - IP20	1Z0000102

Other accessories



Rechargeable battery	Included
Matt White 12V DC - NiMH 3700mAh	1A2620300.00.00



POST PRANDIUM

Daide Groppi / 2023



During a meal with friends, a ladle is reused to scoop up the light
and serve it onto the table.

A project from many years ago, today in a new wireless version.

Archiproducts Design Award 2023


POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .01 Polished Chrome

Note Chargeable table luminaire. Details with polished gold finish. Matt black base. Battery life: 9 hours.



POST PRANDIUM


2W
 3000K - 171lm
 CRI >90
 ON/OFF
 Driver with plug not included
 USB cable included
 IP20

Polished Chrome - 3000K - ON/OFF

| 1A4550108.30.00 |


Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088


Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132





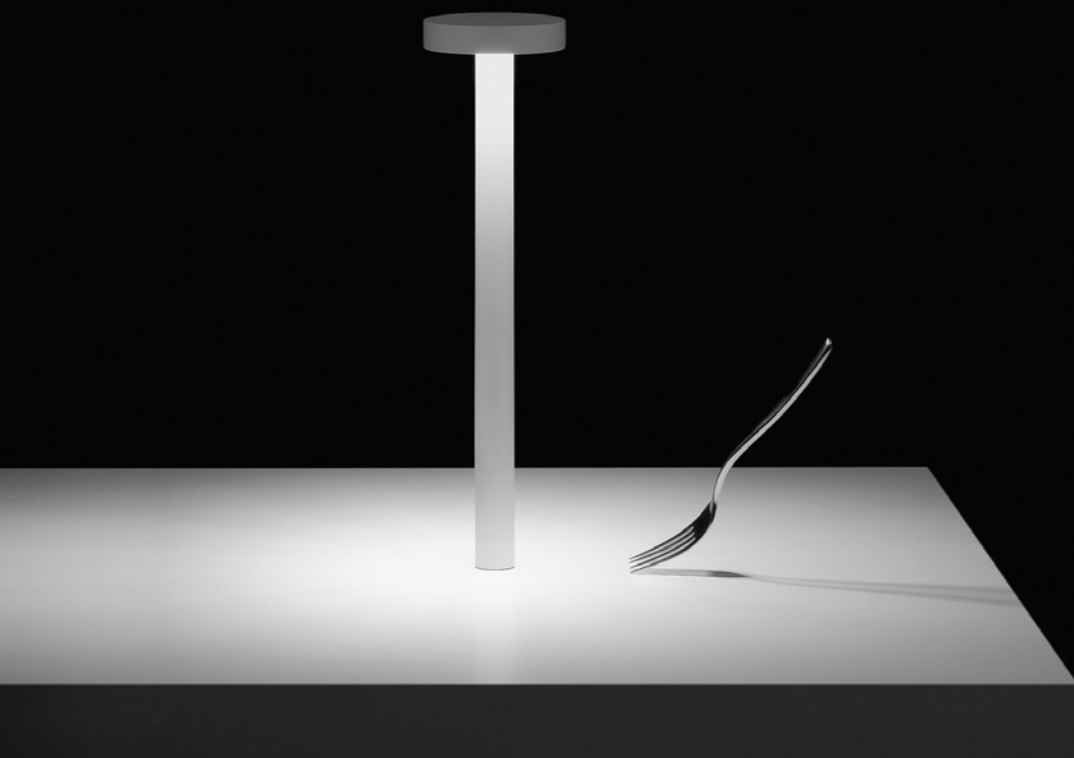


A timeless icon with an eye on the future.
Portable and rechargeable, the greatest expression of freedom.
With TeTaTeT, every table becomes a meeting place, a complete dining experience.
Its light caresses those it illuminates with pure emotion.
Equipped with Touch technology and a magnetic fixing base.
Mention of Honour XXIV Compasso d'Oro ADI Award, 2016



Table / Direct / Wireless

Material	ABS - Metal - Methacrylate		
Finish	.03 Matt White	.04 Matt Black	.18 Matt Gold

Note Chargeable table luminaire. Magnetic fixing stem. Touch ON/OFF.
Battery life: 12 hours.

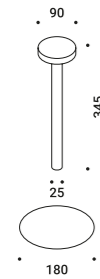


TeTaTeT

2W
2700K - 165lm / 3000K - 178lm
CRI >90
ON/OFF
Driver with plug not included
◆ IP20

Matt White - 2700K - ON/OFF	1A0310308.27.00
Matt White - 3000K - ON/OFF	1A0310308.30.00
Matt Black - 2700K - ON/OFF	1A0310408.27.00
Matt Black - 3000K - ON/OFF	1A0310408.30.00
Matt Gold - 2700K - ON/OFF	1A0311808.27.00
Matt Gold - 3000K - ON/OFF	1A0311808.30.00


Optional accessories

Drivers



Driver with plug	Not included	
Matt Black	Input 110-240V - 50/60Hz Output 6V DC - 1A - 6W - IP20	1Z0000073

Other accessories



Rechargeable battery	Included	
Matt White	4,8V DC - NiMH 4300mAh	1A0430300.00.00
Matt Black	4,8V DC - NiMH 4300mAh	1A0430400.00.00
Matt Gold	4,8V DC - NiMH 4300mAh	1A0431800.00.00

Optional accessories

Other accessories



Table	Not included	
Matt White	1A4020300.00.00	
Matt Black	1A4020400.00.00	



TeTaTeT Flûte

Davide Groppi / 2017



This is an evolution of our TeTaTeT lamp.
The lamp head is lightweight and appears to be floating in air.
The transparent stem brings to mind the glasses used in the classic "mise en place".
Magnetic fixing base.


TeTaTeT Flûte

Davide Groppi / 2017

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Chargeable table luminaire. Magnetic fixing transparent stem.
 Magnetic LED module. Battery life: 9 hours.



TeTaTeT Flûte

2W
 2700K - 167lm / 3000K - 180lm
 CRI >90
 ON/OFF
 Driver with plug not included
 USB cable included


IP20

Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF

1A2360308.27.00
 1A2360308.30.00

Optional accessories

Drivers




Driver with plug

Matt Black Input 110-240V - 50/60Hz
 Output 5V DC - 2A - 10W - IP20

1Z0000088

Not included

LED modules



LED module

Matt White 2W - 2700K - 167lm - CRI >90
 Rechargeable lithium battery 5V DC Li-Ion
 4800mAh - Battery life 9 hours
 2W - 3000K - 180lm - CRI >90
 Rechargeable lithium battery 5V DC Li-Ion
 4800mAh - Battery life 9 hours

1A5360308.27.00
 1A5360308.30.00

Included

Davide Groppi / 2017

TeTaTeT Flûte

Optional accessories

Other accessories



USB to USB-C cable

Matt Black Length 1 m

1Z0000132

Included



Table

Matt White

1A4020300.00.00

Matt Black

1A4020400.00.00

Not included

VIS À VIS

Michele Groppi / 2023



Vis à Vis is a magic trick, between technique and illusion.
Once again, we decided to take away, seeking only the light.
Transparency is the main feature of this battery-powered lamp.

Elle Deco International Design Award 2024

Archiproducts Design Award 2023


VIS À VIS

Michele Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .00 Standard

Note Chargeable table luminaire. Transparent disc with refractive effect.
 Magnetic fixing LED module and transparent stem. Battery life: 9 hours.



VIS À VIS

2W
 2700K - 110lm / 3000K - 113lm
 CRI >90
 ON/OFF
 Driver with plug not included
 USB cable included


◆ IP20

Standard - 2700K - ON/OFF
 Standard - 3000K - ON/OFF

1A4530008.27.00
 1A4530008.30.00

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

LED modules




LED module		Included
Matt White	5W - 2700K - 110lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370008.27.00
	2W - 3000K - 113lm - CRI >90 Rechargeable lithium battery 5V DC Li-Ion 4800mAh - Battery life 9 hours	1A5370008.30.00

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132

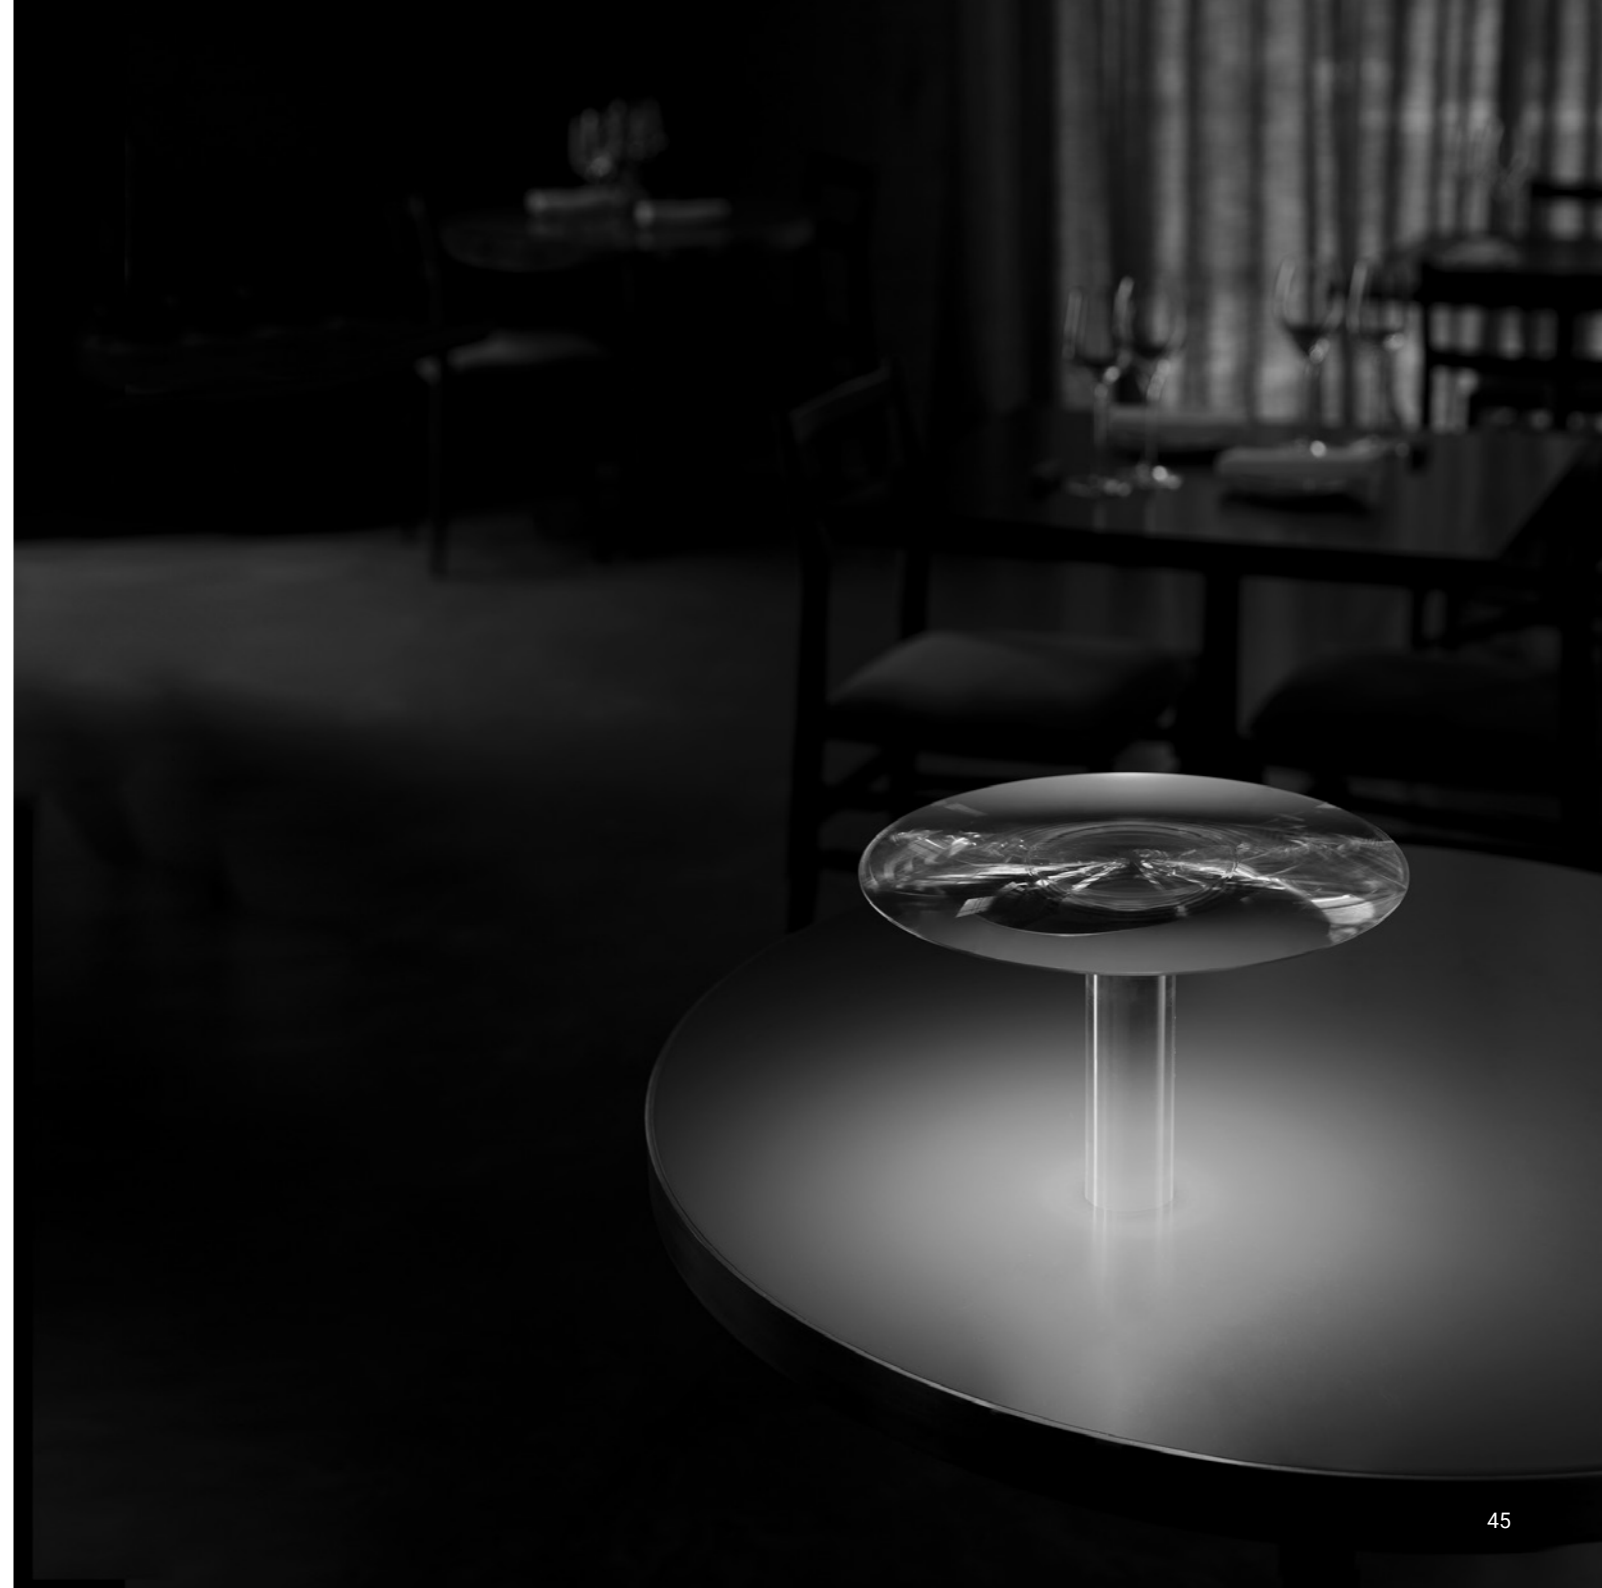

TABLE



ANIMA

Davide Groppi - Giorgio Rava / 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram. It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close.

At the top, an open circle, almost a hook for fishermen of the soul.

Selection for ADI Design Index 2022

AZ Award 2022

Archiproducts Design Award 2021


ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

Material ABS - Carbon fiber - Metal
Finish .04 Matt Black

Note Table luminaire. Touch ON/OFF and adjustment. Black cable.



ANIMA


4W
 5V DC
 2700K - 575lm / 3000K - 589lm
 CRI >80
 Dimmer on board
 Driver with plug not included
 USB cable included
 ◆ IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A1090408.27.06
 1A1090408.30.06

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132





Full and empty, shadow and light.
A circular mirror to be positioned as you please,
to both light and capture the surrounding space.
Born Series Award 2019


CALVINO

Davide Groppi / 2018

Table / Indirect / Indoor

Material Brass - Metal - Methacrylate - Mirror
Finish .00 Standard

Note Table luminaire. Disc with mirror finish adjustable in all directions. Matt blue rear disc. Matt black base. Brass stem. Dimmer on the cable. Black cable.



CALVINO

18W
 24V DC
 2700K - 1275lm / 3000K - 1372lm
 CRI >90
 Driver not included
 Dimmer on board
 Driver with plug not included


◆ IP20

Standard - 2700K - Dimmer on board
 Standard - 3000K - Dimmer on board

1A2710008.27.06
 1A2710008.30.06

Optional accessories

Drivers




Driver with plug

Matt Black Input 110-240V - 50/60Hz
 Output 24V DC - 18W - IP20

1Z0431020

Not included



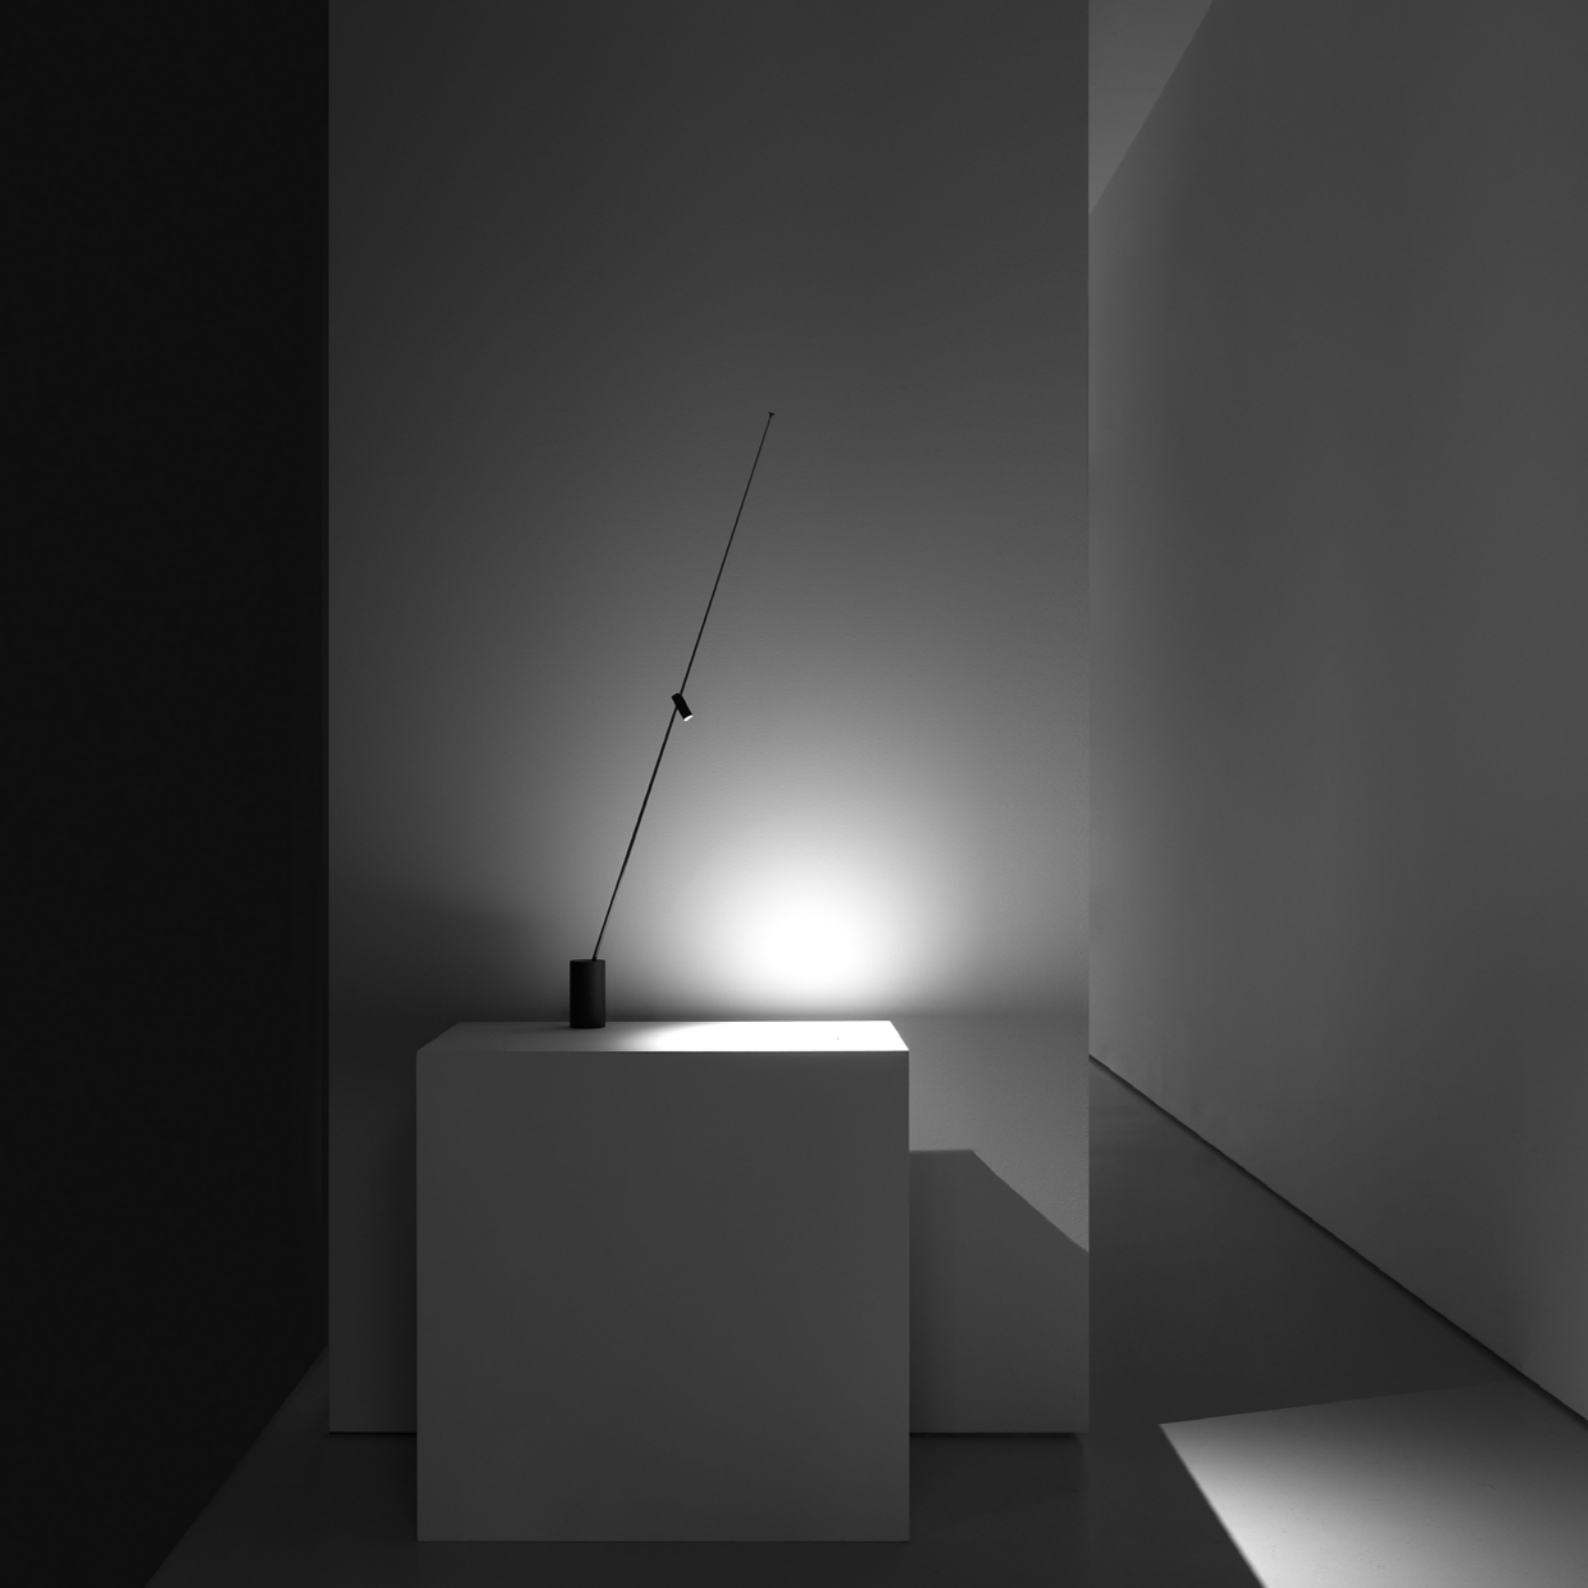


An antenna of light.
Antennas are mysterious, absolute and intrinsically beautiful,
because their essentialness expresses nothing more than their function.
A performing, adjustable and extremely comfortable light.
Selection for ADI Design Index 2023
Archiproducts Design Award 2022

Table / Direct / Indoor

Material Carbon fiber - Metal
Finish .04 Matt Black

Note Table luminaire. Adjustable along the vertical axis. ON/OFF and push control. Black cable.

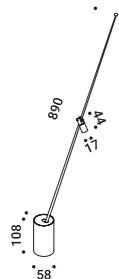

FM

1,5W
 5V DC
 2700K - 154lm / 3000K - 179lm
 CRI >90
 UGR <19
 Dimmer on board
 Driver with plug not included
 USB cable included




Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2440408.27.06
 1A2440408.30.06

Optional accessories

Drivers




Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132

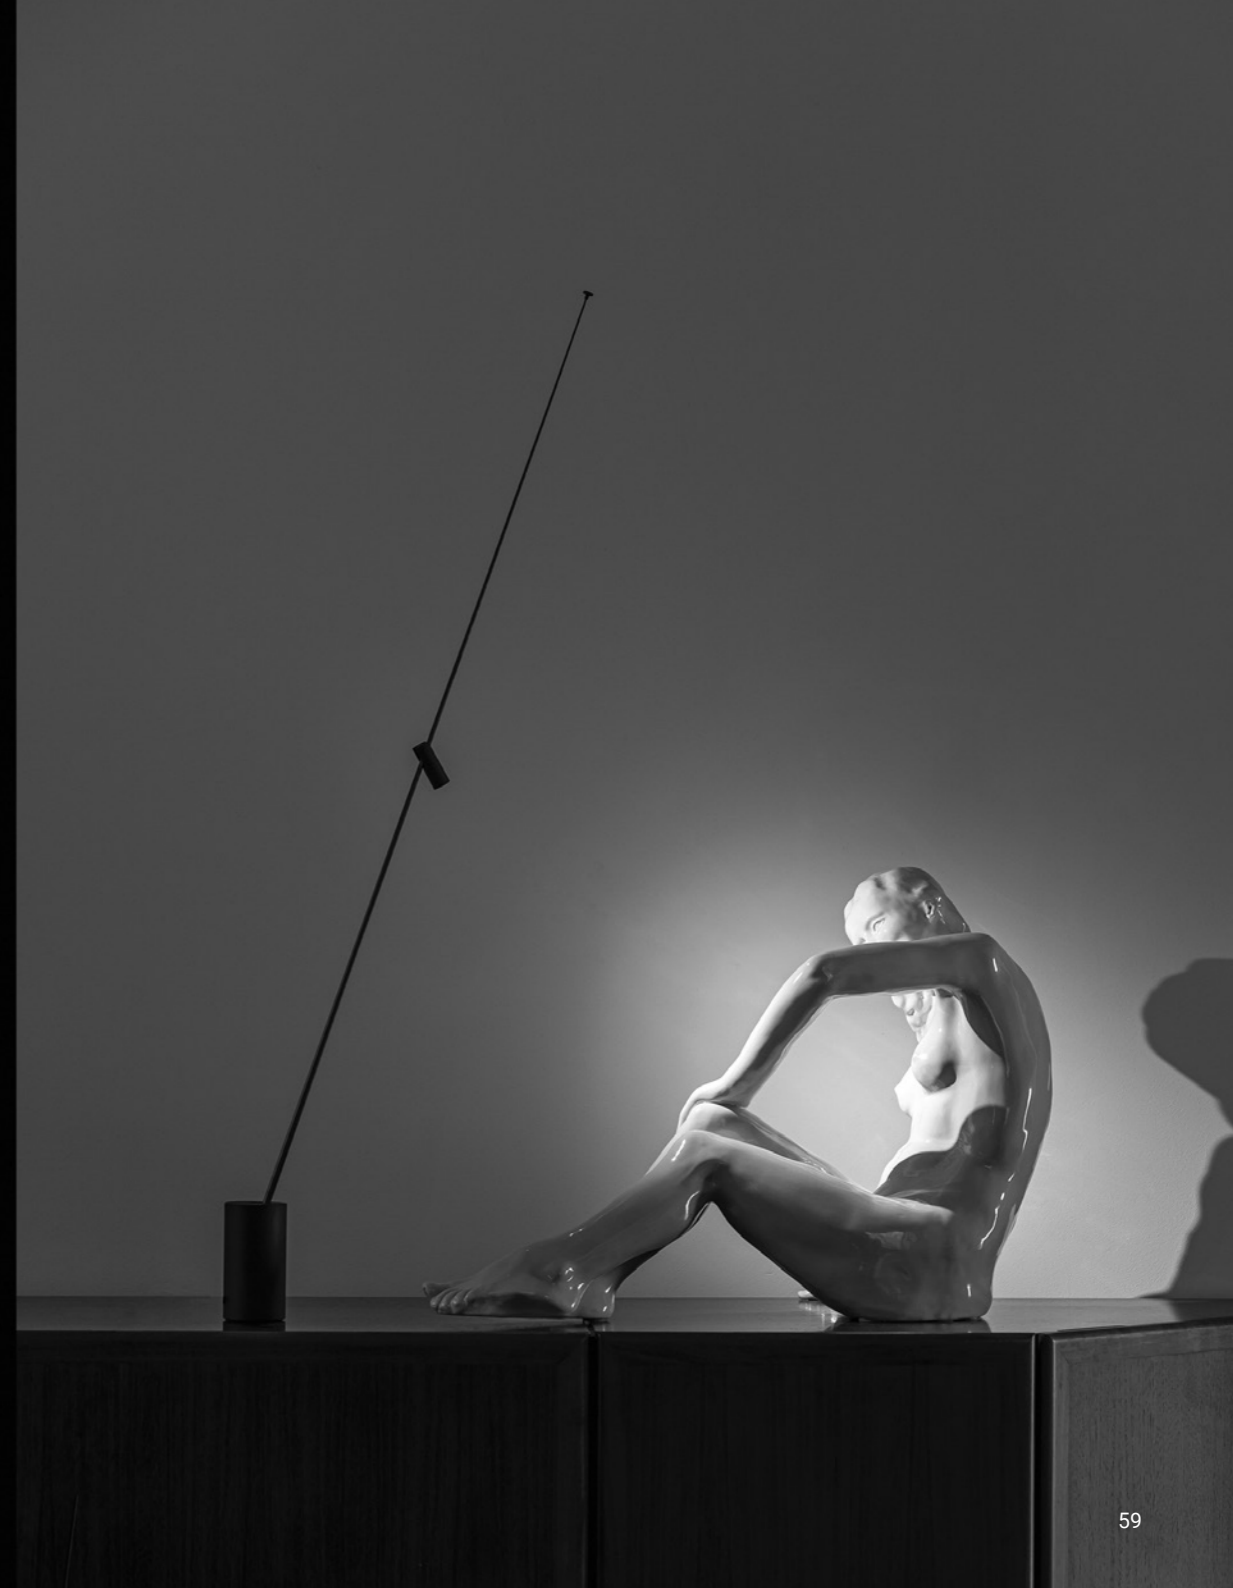

MOON T

Daide Groppi / 2019



Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Suspension and floor versions also available.


MOON T

Davide Groppi / 2019

Table / Diffuse / Indoor

Material Japanese paper - Metal - PE
Finish .00 Standard

Note Table luminaire. PE and Japanese paper shade. Gold finish base. Dimmer on the cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping.



MOON T

Max 15W - E27
220V - 50/60Hz
Dimmer on board
Bulb not included
IP20

Standard - Dimmer on board

1A2690008.00.06

Optional accessories

Bulbs



LED - E27 - A60	Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790

Other accessories

Moisture barrier bag	Not included
Packaging for air and sea shipping	4A2690010





MORSETTO

Daide Groppi / 2017



A lamp that can be positioned, balanced and turned,
but overall it produces a beautiful light on the table.
The oversized workshop-style clamp allows the light source to be positioned far from
where the lamp is attached to the table, using three adjustable arms.
A table lamp, but at the same time a suspended light.
Wall version also available.


MORSETTO

Davide Groppi / 2017

Table / Direct / Indoor

Material Metal
Finish .04 Matt Black

Note Table luminaire. Adjustable in all directions. Shiny red clamp. Dimmer on the cable. Black cable.

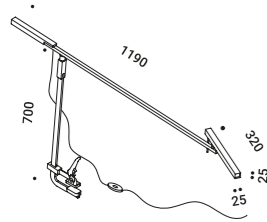

MORSETTO

13W
 24V DC
 2700K - 700lm / 3000K - 753lm
 CRI >90
 UGR <19
 Dimmer on board
 Driver with plug not included




Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2520408.27.06
 1A2520408.30.06

Optional accessories

Drivers



Driver with plug

Matt Black Input 110-240V - 50/60Hz
 Output 24V DC - 18W - IP20

Not included

1Z0431020








A rigorous project in its design.
A dialogue between two essential, concrete and tangible materials: wood and glass.
Part frosted and part transparent, it moves feely on the base,
functioning both as diffuser and convex lens.

Table / Diffuse / Indoor

Material Glass - Oak wood
Finish .00 Standard

Note Table luminaire. Sanded glass ball. Oak wood base. Dimmer on the cable.
 Black cable.




PIGRECO
 6,5W
 24V DC
 3000K - 450lm
 CRI >90
 Dimmer on board
 Driver with plug not included
 IP20

Standard - 3000K - Dimmer on board

| 1A2600008.30.06 |

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20	1Z0431020



FLOOR




A tribute to Alberto Giacometti and to his thin fellows...
A lamp for lighting pictures, powered by an ordinary electrical socket.
The lamp has an adjustable light and it can be oriented.
The lamp section is reduced to a minimum.

Floor-Suspension / Indirect / Indoor

Material Brass - Methacrylate
Finish **.03** Matt White **.04** Matt Black **.08** Brushed Brass


Note Floor luminaire with ceiling fixing. Adjustable along the vertical axis. Matt white rose. AISI 304 stainless steel suspension cable. Dimmer on the cable. Transparent cable. MASAI 2: version with power cable only and without driver.

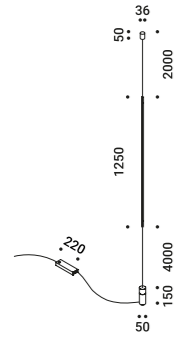

MASAI 1

Driver with plug version
 15,5W
 220V - 50/60Hz
 2700K - 600lm / 3000K - 619lm
 CRI >90
 Driver integrated
 Dimmer on board
 IP20

Matt White - 2700K - Dimmer on board	1A2720308.27.06
Matt White - 3000K - Dimmer on board	1A2720308.30.06
Matt Black - 2700K - Dimmer on board	1A2720408.27.06
Matt Black - 3000K - Dimmer on board	1A2720408.30.06
Brushed Brass - 2700K - Dimmer on board	1A2720808.27.06
Brushed Brass - 3000K - Dimmer on board	1A2720808.30.06

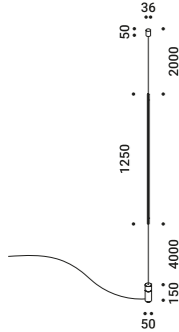

MASAI 2

Remote driver version
 13W
 220V - 50/60Hz
 2700K - 600lm / 3000K - 619lm
 CRI >90
 Driver not included
 IP20

Matt White - 2700K	1A2720308.27.20
Matt White - 3000K	1A2720308.30.20
Matt Black - 2700K	1A2720408.27.20
Matt Black - 3000K	1A2720408.30.20
Brushed Brass - 2700K	1A2720808.27.20
Brushed Brass - 3000K	1A2720808.30.20

Optional accessories

Suspension kits



Sloped ceiling suspension kit		Not included
	Nickel plated - 1 Piece	1A0510000.00.00



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.03.00



Ceiling suspension kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.03.00
Matt Black	For suspension cables - 1 Piece	1X0010400.03.00




Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00




304 Stainless steel suspension cable		Not included
	Lenght 10 m	1A1680000.00.00

Drivers



Driver		Not included
220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	MASAI 2 1Z0240410



Dimmable controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	MASAI 2 1Z0000034





MOON F

Daide Groppi / 2023

Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Suspension and floor versions also available.


MOON F

Davide Groppi / 2023

Floor / Diffuse / Indoor

Material Japanese paper - PE
Finish .00 Standard

Note Floor luminaire. PE and Japanese paper shade. Matt white base. Dimmer on the cable. White cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate compulsory for MOON 120 F model.




MOON 80 F

Max 15W - E27
 220V - 50Hz
 Dimmer on board
 Bulb not included
IP20

Standard - Dimmer on board

| 1A4880008.00.06 |



MOON 120 F

Max 2x25W - E27
 220V - 50Hz
 Dimmer on board
 Bulb not included
IP20

Standard - Dimmer on board

| 1A4890008.00.06 |

MOON F

Davide Groppi / 2023

Optional accessories

Bulbs



LED - E27 - A60

220-240V - 11,2W - 360°
 2700K - 1521lm - CRI >90
 Energy Efficiency D - Dimmable

MOON 80 F

1Y0330790

Not included



LED - E27 - A150

220-240V - 20W - 200°
 2700K - 2452lm - CRI >80
 Energy Efficiency E - Dimmable

MOON 120 F

1Y2160020

Not included

Other accessories

Moisture barrier bag

Packaging for air and sea shipping

MOON 80 F

4A2840010

Not included

Moisture barrier bag

Packaging for air and sea shipping

MOON 120 F

49860020

Not included

Wooden crate

Packaging for air and sea shipping

MOON 120 F

49860010

Not included

ORIGINE

Davide Groppi - Giorgio Rava / 2020



From the Latin "origo", start, birth, source.
It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner.

Mysterious and enigmatic, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.

Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.


Available in 3 different heights and in an outdoor version.

**AZ Award 2021 and People's Choice
Archiproducts Design Award 2020**

Floor / Indirect / Indoor

Material Glass fiber - Metal
Finish .04 Matt Black

Note Floor luminaire. Dimmer on the cable. Black cable.

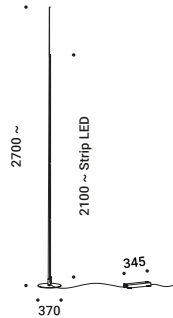

ORIGINE 290

25W
 220V
 2700K - 1956lm / 3000K - 2075lm
 CRI >80
 Driver included
 Dimmer on board
 IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2300408.27.06
 1A2300408.30.06




ORIGINE 390

30W
 220V
 2700K - 2843lm / 3000K - 3063lm
 CRI >80
 Driver included
 Dimmer on board
 IP20

Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A2310408.27.06
 1A2310408.30.06

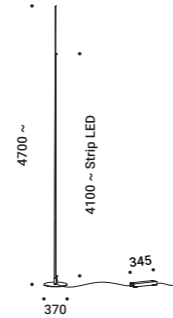

ORIGINE 490

35W
 220V
 3000K - 4051lm / 2700K - 3760lm
 CRI >80
 Driver included
 Dimmer on board
 IP20

Matt Black - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board

1A2320408.27.06
 1A2320408.30.06





A special project, an authentic ready-made.
Obtained from a flexible fishing rod, it is a delicate and elegant sign,
which brings to mind the subtle branches of a willow tree
or bamboo canes floating on a light breeze.
Sampei is an unexpected gift, it is the magic of looking up, using light as a hook,
and being amazed by so much weightlessness.
The light is the fisherman's line, catching faces, gazes, people.
Available in 4 different heights and also in an outdoor version.

XXIII Compasso d'Oro ADI Award 2014
Elle Deco International Design Award 2011


Compasso d'Oro ADI
Award 2014



Floor / Direct / Indoor

Material Glass fiber - Metal
Finish **.03** Matt White **.04** Matt Black


Note Floor luminaire. Adjustable in all directions. Dimmer on the cable. White cable for the matt white finish, black cable for the matt black finish.

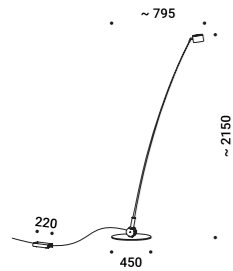

SAMPEI 230
 21W
 220V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board
 IP20

Matt White - 2700K - Dimmer on board
 Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board


1A3730308.27.06
 1A3730308.30.06
 1A3730408.27.06
 1A3730408.30.06

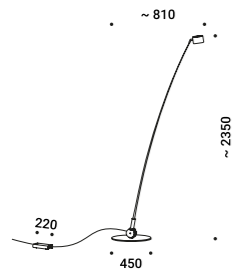

SAMPEI 260
 21W
 220V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board
 IP20

Matt White - 2700K - Dimmer on board
 Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board


1A3740308.27.06
 1A3740308.30.06
 1A3740408.27.06
 1A3740408.30.06

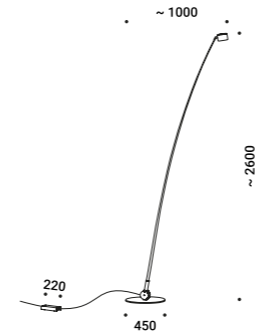

SAMPEI 290
 21W
 220V - 50/60Hz
 2700K - 1808lm / 3000K - 1890lm
 CRI >90
 Driver integrated
 Dimmer on board
 IP20

Matt White - 2700K - Dimmer on board
 Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board

1A3750308.27.06
 1A3750308.30.06
 1A3750408.27.06
 1A3750408.30.06

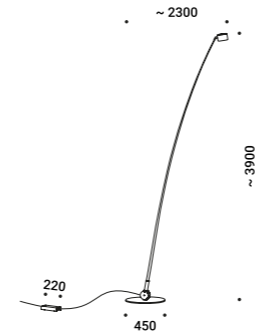

SAMPEI 440
 21W
 220V - 50/60Hz
 2700K - 1832lm / 3000K - 1915lm
 CRI >90
 Driver integrated
 Dimmer on board
 IP20

Matt White - 2700K - Dimmer on board
 Matt White - 3000K - Dimmer on board
 Matt Black - 2700K - Dimmer on board
 Matt Black - 3000K - Dimmer on board


1A3760308.27.06
 1A3760308.30.06
 1A3760408.27.06
 1A3760408.30.06

Optional accessories


Other accessories




Accessory holder + Soft filter + Honeycomb louvre		Not included
Matt Black		1X0070400.04.00




Accessory holder + Elliptical filter		Not included
Matt Black		1X0070400.05.00



Blue filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.06.00



Red filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.07.00



Yellow filter		Not included
Standard	Compulsory with 1X0070400.04.00 / 1X0070400.05.00	1X0070000.08.00



SUSPENSION



CATHODE

Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass. The shape brings to mind a light bulb that was never born. Think steampunk: situations in which instruments were inspired by the rudiments of electricity. The classic light bulb that has no future becomes a wonderful device made of luminous diodes. What would the past have looked like if the future had arrived first?


CATHODE

Omar Carraglia / 2015


Suspension / Diffuse / Indoor

Material Blown glass - Metal
Finish **.03** Matt White **.08** Brushed Brass

Note Suspension luminaire. Blown glass diffuser. Matt white rose and white cable for the matt white finish. Matt black rose and black cable for the brushed brass finish. Single rose for more than one lamp on request. CATHODE 2: plasterboard version with magnetic fixing flat rose.

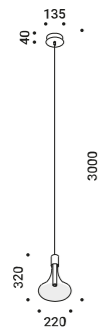


CATHODE 1


Ceiling driver version
 5,6W
 220V - 50Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 ON/OFF


Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF
 Brushed Brass - 2700K - ON/OFF
 Brushed Brass - 3000K - ON/OFF

1A2980308.27.00
 1A2980308.30.00
 1A2980808.27.00
 1A2980808.30.00

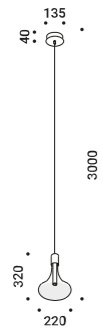

CATHODE 1

Ceiling driver version
 6W
 220V - 50Hz
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver integrated
 DALI


Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Brushed Brass - 2700K - DALI
 Brushed Brass - 3000K - DALI


1A2980308.27.01
 1A2980308.30.01
 1A2980808.27.01
 1A2980808.30.01

CATHODE

Omar Carraglia / 2015



CATHODE 2


Remote driver version
 4W
 Max 350mA DC
 2700K - 264lm / 3000K - 284lm
 CRI >90
 Driver not included


Matt White - 2700K
 Matt White - 3000K
 Brushed Brass - 2700K
 Brushed Brass - 3000K



1A2990308.27.20
 1A2990308.30.20
 1A2990808.27.20
 1A2990808.30.20

Optional accessories

Suspension kits



Drivers



Decentralization kit

			Not included
	CATHODE 1	1A0360000.00.00	

Kit ceiling rose and decentralizer

			Not included
Matt White	White cable 3 m included	CATHODE 1	1A0770300.00.00
Matt Black	Black cable 3 m included	CATHODE 1	1A0770400.00.00

Driver

			Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0240860.350

Driver

			Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	CATHODE 2	1Z0240840.350





LOUIS XIV

Daide Groppi / 2023

Louis XIV is the freakiest letter of our light alphabet.
It's a disobedient design that translates a certain rebellion
to common lamp models into light.
I wanted to investigate the idea of the chandelier: in line with our poetics,
Louis XIV is the only possible solution for lightness and irony.
Dimmable suspension lamp with double emission.


LOUIS XIV

Davide Groppi / 2023

Suspension / Direct-Indirect / Indoor

Material Glass - Metal
Finish .19 Polished Gold

Note Suspension luminaire. Eighty crystal drops and a bird. Natural brass branches. Structure with polished gold finish. Matt white rose. Dual emission and on/off. White cable. LOUIS XIV 2: version with power cable only and without rose.

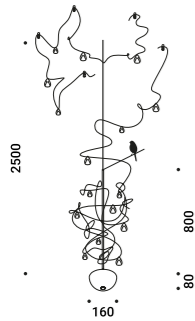

LOUIS XIV 2

Remote driver version

15W

Max 250mA DC

2700K - Up 890lm - Down 210lm /

3000K - Up 936lm - Down 235lm

CRI >90

UGR <19

Driver not included

2 Drivers required

◆ IP20

Polished Gold - 2700K

Polished Gold - 3000K

1A4361908.27.20

1A4361908.30.20

Optional accessories

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard

Not included

Matt White

For electrical cables - 1 Piece
 Plasterboard cut-out Ø 44 mm
 Minimum space for mounting 70 mm


1X0000300.05.00

Matt Black

For electrical cables - 1 Piece
 Plasterboard cut-out Ø 44 mm
 Minimum space for mounting 70 mm

1X0000400.05.00

Drivers



Driver

Not included

220-240V(110-127V) 250mA/13,5W(13,5W)/IP20/DALI - PUSH
 - 1-10V

1Z0241270.250






Light and transparency are the true stars of this project. We have always liked to think heretically, evoking mystery, magic and seduction. Magia is the new modular suspension lighting system that can be adapted to suit the different heights of the rooms and can generate direct and indirect light with the 360° adjustable module.

In this case, the lens is not used to focus, but to modify the vision and perception of the object.


The effect of the convex lens conceals the part of the light beam and produces the lightest effect of suspension and inconsistency.

Archiproducts Design Award 2023

Single installation with recessed or ceiling suspension kit

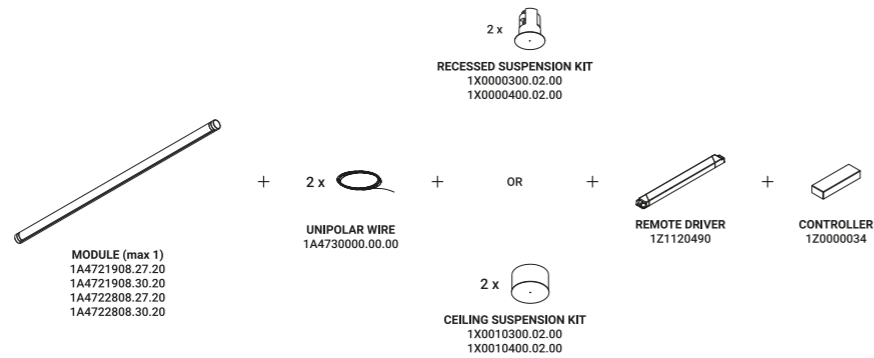


Multiple installation with recessed or ceiling suspension kit

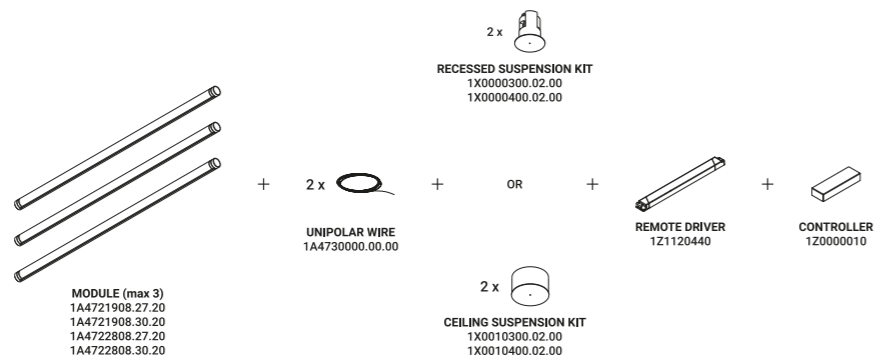

Suspension / Direct-Indirect / Indoor

Material Metal - PMMA
Finish .19 Polished Gold .28 Polished Black Chrome

Note Modular suspension luminaire. Adjustable along the horizontal axis. Transparent bar with refractive effect. LED module profile with matt black finish. Details with polished gold or black chrome finish. Matt white rose.

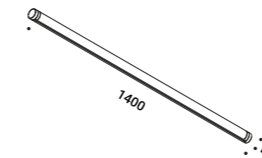

MAGIA - MODULE

19W
24V DC
2700K - 1272lm / 3000K - 1312lm
CRI >90
Driver not included
IP20

Polished Gold - 2700K
Polished Gold - 3000K
Polished Black Chrome - 2700K
Polished Black Chrome - 3000K

1A4721908.27.20
1A4721908.30.20
1A4722808.27.20
1A4722808.30.20

Compulsory accessories

Installation kits



Unipolar wire - 6 m	1 Piece - Max 60V DC	Max 3 modules	1A4730000.00.00	Not included
---------------------	----------------------	---------------	-----------------	--------------

Suspension kits




Recessed suspension kit for 12,5 mm plasterboard				Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.02.00	
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.02.00	



Ceiling suspension kit				Not included
Matt White	For electrical cables - 1 Piece		1X0010300.02.00	
Matt Black	For electrical cables - 1 Piece		1X0010400.02.00	


Optional accessories

Suspension kits




Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	


Drivers




Driver				Not included
100-240V	24V/50W/IP20/ON/OFF	Max 1 module	1Z1120490	



Driver				Not included
100-240V	24V/80W/IP20/ON/OFF	Max 3 module	1Z1120440	




Driver				Not included
100-240V	24V/150W/IP67/1-10V	Max 6 modules	1Z1120500	




Dimmable controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034	




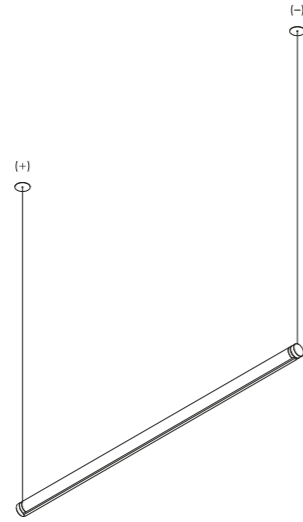


Example of single installation with recessed suspension kit

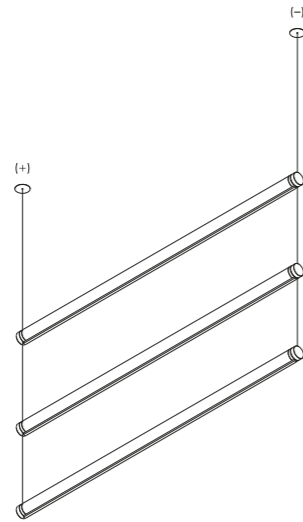


Example of multiple installation with recessed suspension kit

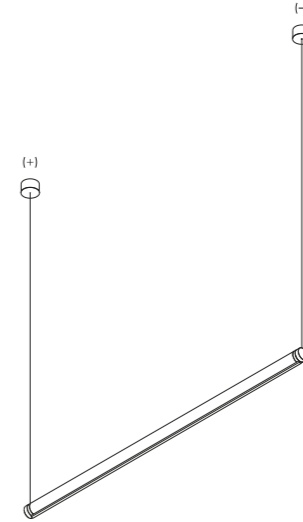


Example of single installation with ceiling suspension kit

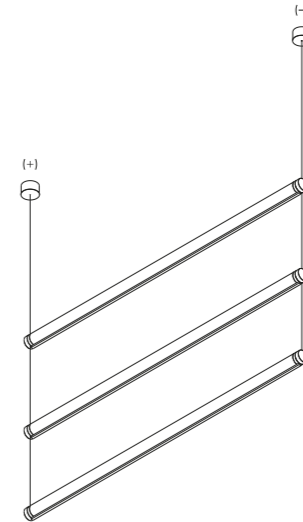

Example of multiple installation with ceiling suspension kit

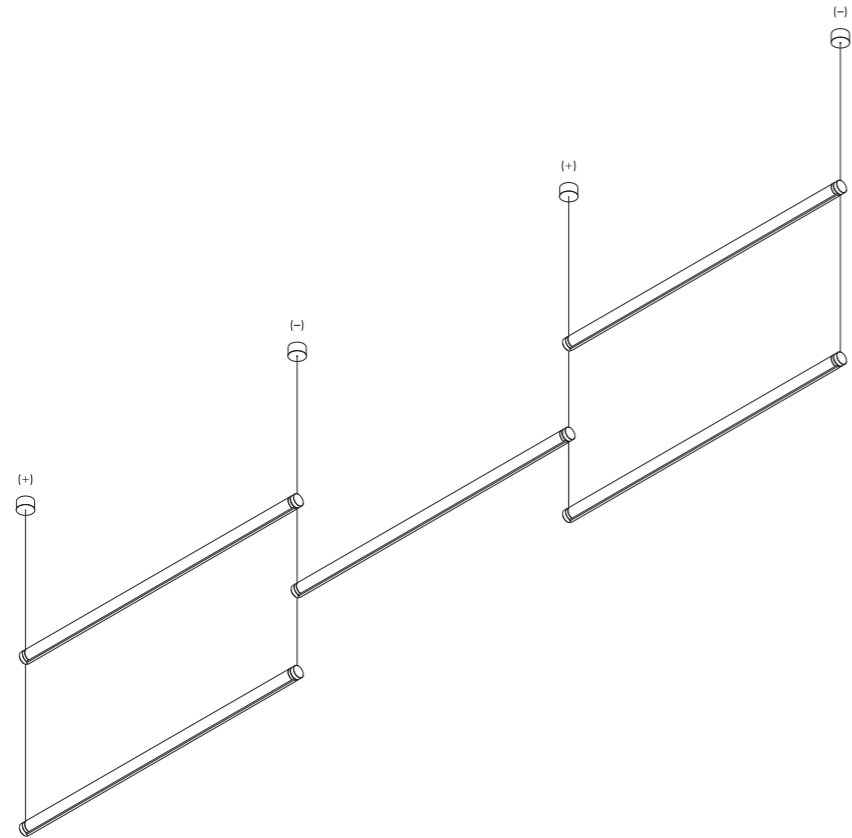


Example of multiple installation | Max 3 tubes for cable

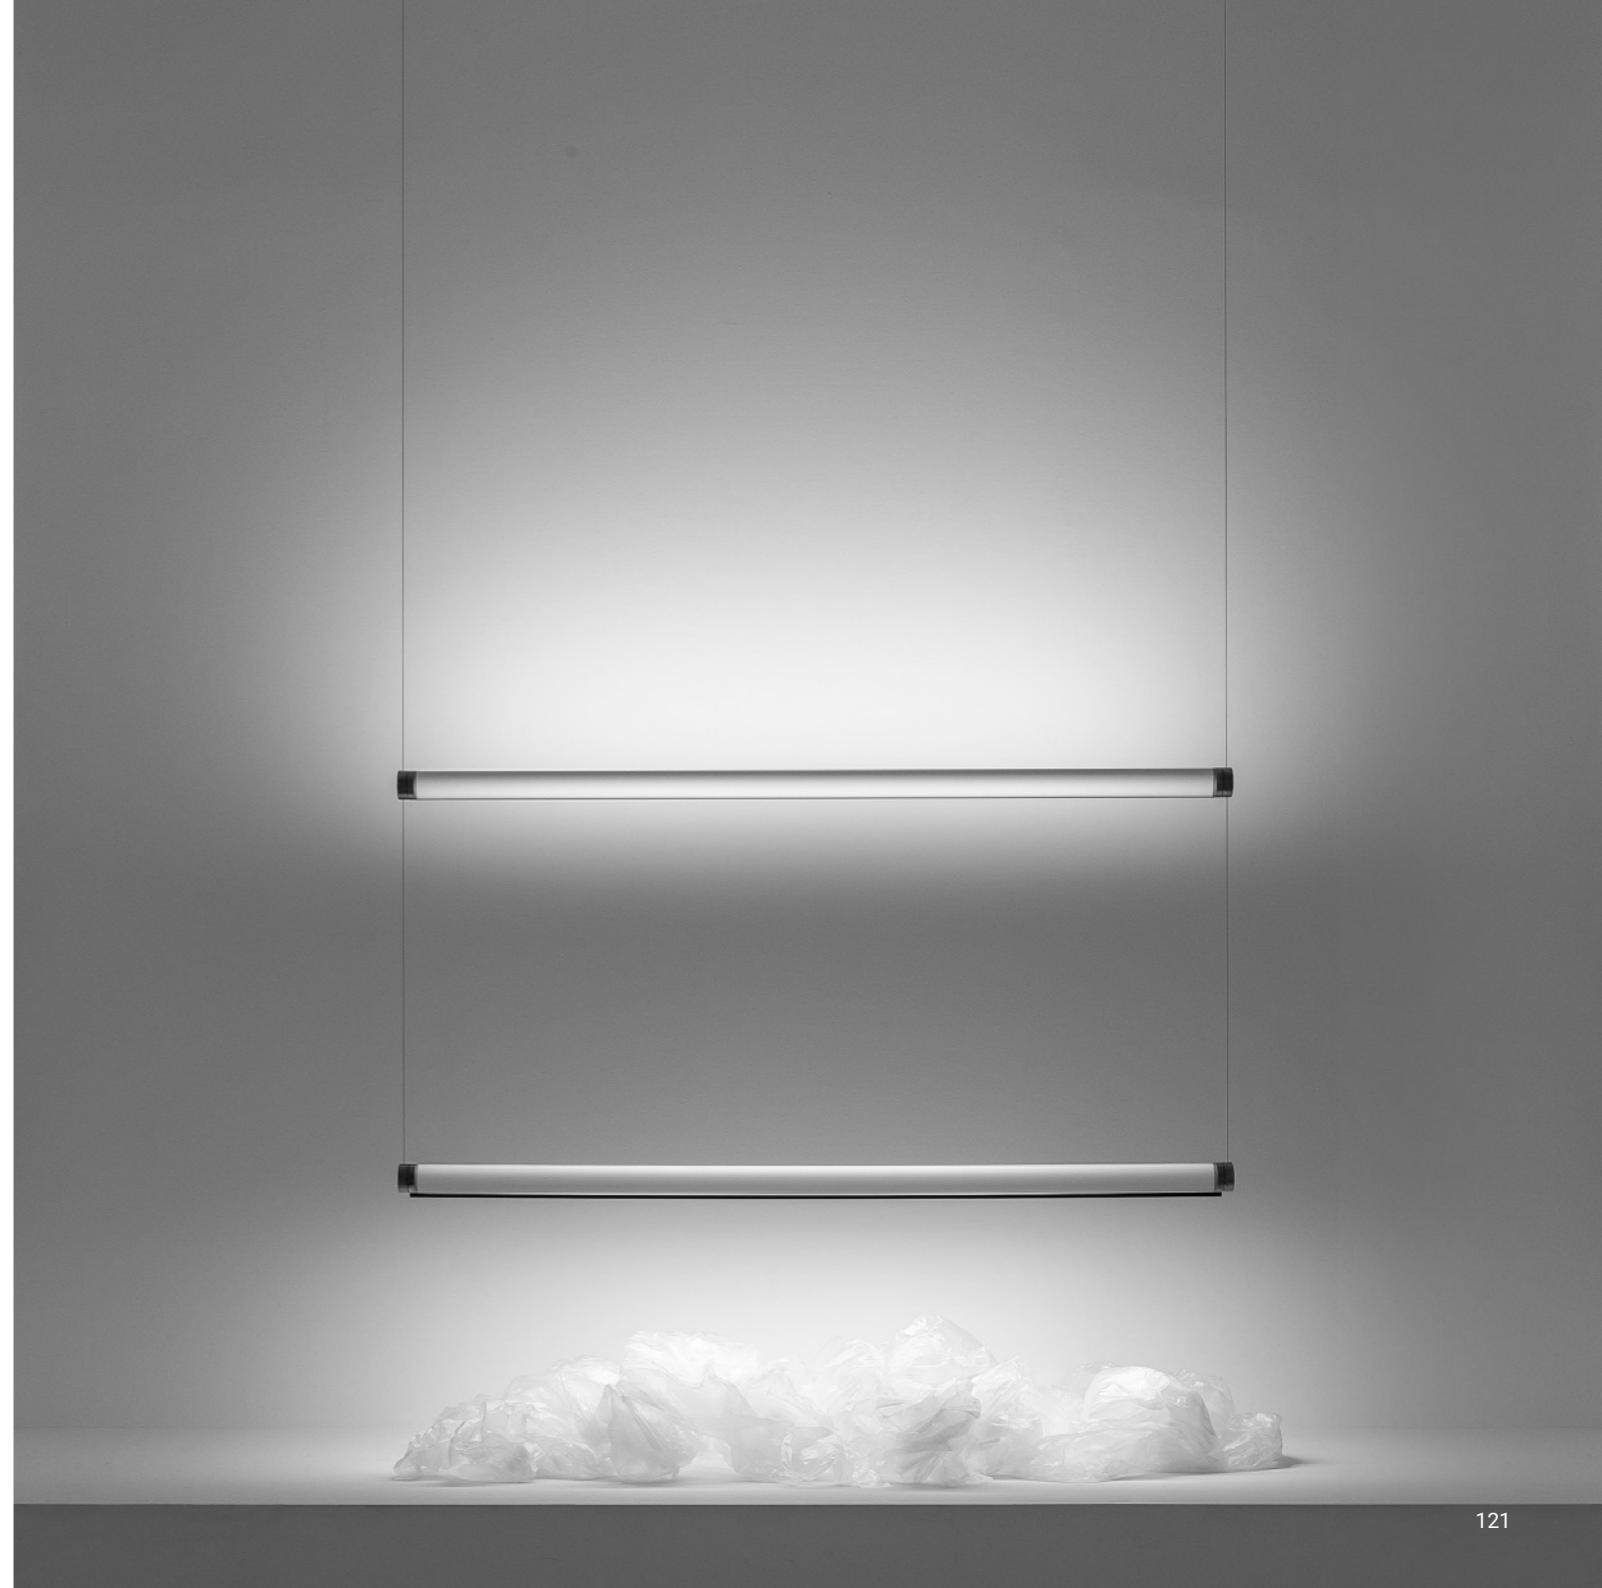

MISS

Omar Carraglia / 2006

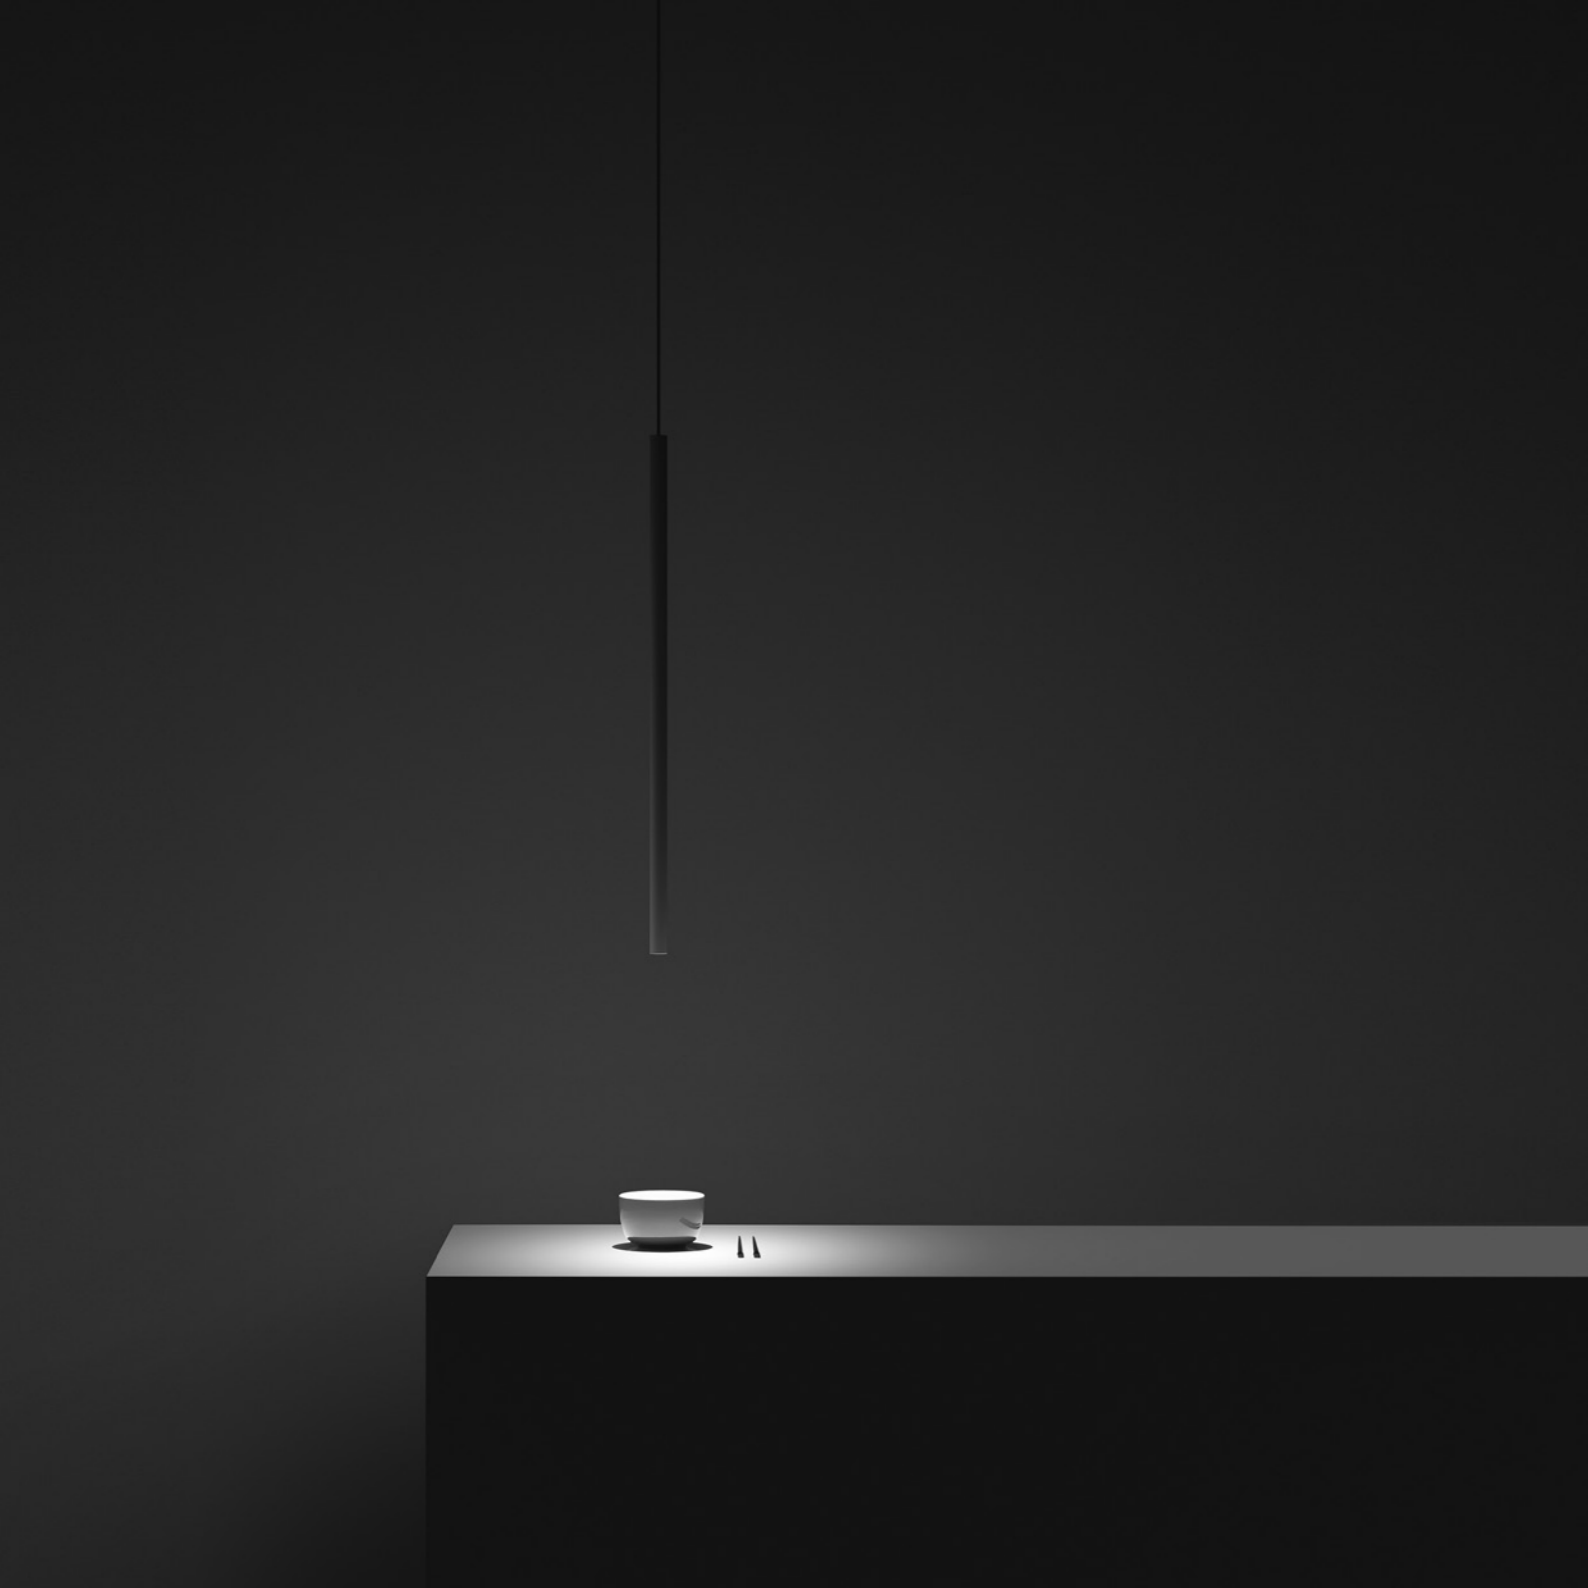


So slim and essential...
The fundamental concept of this project is minimalism.
A small tube that lights the table with wonder.
A real dual project: sign and light.

Suspension / Direct / Indoor

Material	Metal			
Finish	.03 Matt White	.04 Matt Black	.08 Brushed Brass	.26 Total Black

Note Suspension luminaire. Matt white rose and white cable for the matt white and matt black finish. Matt black rose and black cable for the total black and brushed brass finish. Single rose for more than one lamp on request. MISS 2: plasterboard version with magnetic fixing flat rose.



MISS 1

Ceiling driver version
5,6W
220V - 50/60Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
ON/OFF
IP20

Matt White - 2700K - ON/OFF	1A2960308.27.00
Matt White - 3000K - ON/OFF	1A2960308.30.00
Matt Black - 2700K - ON/OFF	1A2960408.27.00
Matt Black - 3000K - ON/OFF	1A2960408.30.00
Brushed Brass - 2700K - ON/OFF	1A2960808.27.00
Brushed Brass - 3000K - ON/OFF	1A2960808.30.00
Total Black - 2700K - ON/OFF	1A2962608.27.00
Total Black - 3000K - ON/OFF	1A2962608.30.00



MISS 1

Ceiling driver version
6W
220V - 50Hz
2700K - 290lm / 3000K - 310lm
CRI >90
Driver integrated
DALI
IP20

Matt White - 2700K - DALI	1A2960308.27.01
Matt White - 3000K - DALI	1A2960308.30.01
Matt Black - 2700K - DALI	1A2960408.27.01
Matt Black - 3000K - DALI	1A2960408.30.01
Brushed Brass - 2700K - DALI	1A2960808.27.01
Brushed Brass - 3000K - DALI	1A2960808.30.01
Total Black - 2700K - DALI	1A2962608.27.01
Total Black - 3000K - DALI	1A2962608.30.01





MISS 2

Remote driver version
4W
Max 350mA DC
2700K - 290lm / 3000K - 310lm
CRI >90
Driver not included
IP20

Matt White - 2700K	1A2970308.27.20
Matt White - 3000K	1A2970308.30.20
Matt Black - 2700K	1A2970408.27.20
Matt Black - 3000K	1A2970408.30.20
Brushed Brass - 2700K	1A2970808.27.20
Brushed Brass - 3000K	1A2970808.30.20
Total Black - 2700K	1A2972608.27.20
Total Black - 3000K	1A2972608.30.20

Optional accessories

Suspension kits





Decentralization kit			Not included
	MISS 1	1A0360000.00.00	

Kit ceiling rose and decentralizer Not included

Matt White	White cable 3 m included	MISS 1	1A0770300.00.00
Matt Black	Black cable 3 m included	MISS 1	1A0770400.00.00

Drivers



Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0240860.350	

Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	MISS 2	1Z0240840.350	

MOON

Daide Groppi / 2005




Moon was created from the dream of bringing the moon inside your own home.
The hand-made Japanese paper surface makes every lamp unique.
Table and floor versions available.

Suspension / Diffuse / Indoor

Material Japanese paper - PE
Finish .00 Standard


Note Suspension luminaire. PE and Japanese paper shade. Matt white rose. AISI 304 stainless steel suspension cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping. MOON 60 DE: version with dual emission and on/off. Transparent cable.

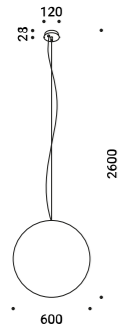

MOON 60
 Max 15W - E27
 220V - 50Hz
 ON/OFF
 Bulb not included
 IP20

Standard - ON/OFF


|1A2820008.00.00 |

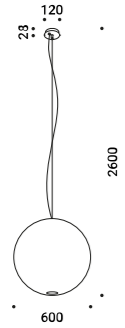

MOON 60 DE
 Dual emission
 Max 15W - E27
 220V - 50Hz
 ON/OFF
 Bulb not included
 IP20

Standard - ON/OFF


|1A2830008.00.00 |

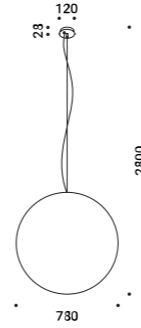

MOON 80
 Max 15W - E27
 220V - 50Hz
 ON/OFF
 Bulb not included
 IP20

Standard - ON/OFF


|1A2840008.00.00 |

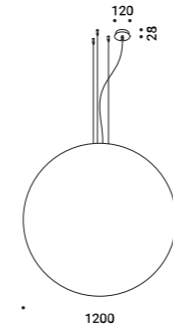

MOON 120
 Max 2x25W - E27
 220V - 50Hz
 ON/OFF
 Bulb not included
 IP20

Standard - ON/OFF

|1A2850008.00.00 |

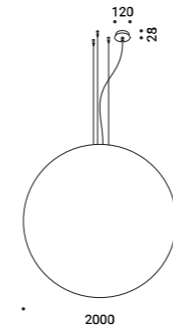

MOON 200
 Max 4x25W - E27
 220V - 50Hz
 ON/OFF
 Bulb not included
 Transport excluded
 IP20

Standard - ON/OFF

|1A2860008.00.00 |

Optional accessories

Bulbs



LED - GU10 - PAR16			Not included
220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	MOON 60 DE	1Y0330500	



LED - E27 - A60			Not included
220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 60 / MOON 60 DE / MOON 80 / MOON 200	1Y0330790	



LED - E27 - A150			Not included
220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120	1Y2160020	

Suspension kits




Sloped rose suspension kit			Not included
Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / MOON 80	1A0520000.00.00	



Sloped ceiling suspension kit			Not included
Nickel plated - 1 Piece	MOON 120	1A0510000.00.00	



Decentralization kit			Not included
		1A0360000.00.00	



Kit ceiling rose and decentralizer			Not included
Matt White	White cable 3 m included	1A0770300.00.00	
Matt Black	Black cable 3 m included	1A0770400.00.00	

Optional accessories

Other accessories

Moisture barrier bag			Not included
Packaging for air and sea shipping	MOON 60 / MOON 60 DE	4A2820010	

Moisture barrier bag			Not included
Packaging for air and sea shipping	MOON 80	4A2840010	

Moisture barrier bag			Not included
Packaging for air and sea shipping	MOON 120	49860020	

Moisture barrier bag			Not included
Packaging for air and sea shipping	MOON 200	48780030	

Wooden crate			Not included
Packaging for air and sea shipping	MOON 120	49860010	

Wooden crate			Not included
Packaging for air and sea shipping	MOON 200	48780020	



NEURO

Davide Groppi - Beppe Merlano / 2013

The idea is to bring light wherever you like, starting from a socket.
A simple project, almost a revival of the old electrical wiring.
A plug, a cable, some isolators, a socket and a LED.
Outdoor version also available.
Design Plus Award 2014




NEURO

Davide Groppi - Beppe Merlano / 2013

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Suspension luminaire. Five cable clips included. Matt white cable clips and white cable for the matt white finish. Matt black cable clips and black cable for the matt black finish.

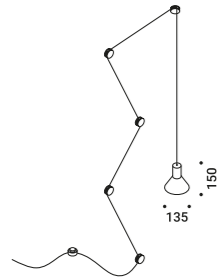

NEURO

Max 15W - E27
 220V - 50/60Hz
 ON/OFF
 Bulb not included




Matt White - ON/OFF
 Matt Black - ON/OFF

1A0160308.00.00
 1A0160408.00.00

Optional accessories

Installation kits



Wall and ceiling rose		Not included
Matt White		1A3440300.00.00
Matt Black		1A3440400.00.00



Clamp		Included
Matt White	1 Piece	1A3270300.00.00
Matt Black	1 Piece	1A3270400.00.00

Bulbs



LED - E27 - PAR30s		Not included
	220-240V - 9,5W - 25° 3000K - 760lm - CRI >80 Energy Efficiency F - Dimmable	1Y0330730





REFLEX S


Michele Groppi / 2023

A powerful LED and a subtle mirror.
A magic and almost invisible lighting solution,
which provides an indirect light that multiplies spaces and gives the eye
unprecedented perspectives, unexpected depths, illusions of light.
Wall version also available.

Suspension / Indirect / Indoor

Material Metal - Mirror
Finish .04 Matt Black

Note Suspension luminaire. Plane with mirror finish. Matt black rear plane. Matt white rose. AISI 304 stainless steel suspension cables. Black cable.

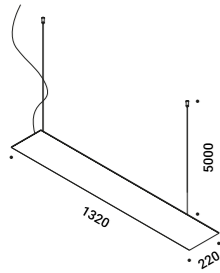

REFLEX S 2

Remote driver version
 49W
 Max 500mA DC
 2700K - 5787lm / 3000K - 6156lm
 CRI >90
 Driver not included
 IP20

Matt Black - 2700K
 Matt Black - 3000K

1A4790408.27.20
 1A4790408.30.20

Optional accessories

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.01.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00




Ceiling suspension kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00



Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Drivers



Driver		Not included
220-240V(100-127V)	1000mA/60W(40W)/IP20/DALI	1Z0241140.1000

SHANGHAI


Davide Groppi / 2013

The smallest possible shape.
A suspended luminous segment.
Beautiful by itself or in composition.
Suitable for working area or kitchen.

Suspension / Direct / Indoor

Material Metal - Methacrylate
Finish .03 Matt White .08 Brushed Brass


Note Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. Transparent cable.

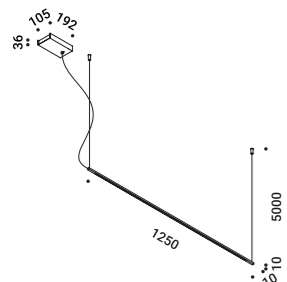

SHANGHAI 1

Ceiling driver version
 15W
 220V - 50/60Hz
 2700K - 592lm / 3000K - 619lm
 CRI >90
 Driver integrated
 PUSH
 IP20

Matt White - 2700K - PUSH	1A3260308.27.04
Matt White - 3000K - PUSH	1A3260308.30.04
Brushed Brass - 2700K - PUSH	1A3260808.27.04
Brushed Brass - 3000K - PUSH	1A3260808.30.04

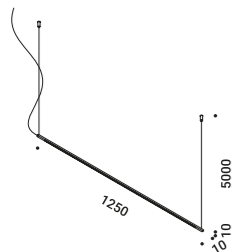


SHANGHAI 2

Remote driver version
 13W
 24V DC
 2700K - 592lm / 3000K - 619lm
 CRI >90
 Driver not included
 IP20

Matt White - 2700K	1A3260308.27.20
Matt White - 3000K	1A3260308.30.20
Brushed Brass - 2700K	1A3260808.27.20
Brushed Brass - 3000K	1A3260808.30.20

Optional accessories

Suspension kits




Sloped ceiling suspension hook		Not included
Chrome plated - 1 Piece		1A0530000.00.00



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.01.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2 1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2 1X0000400.04.00




Ceiling suspension kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For electrical cables - 1 Piece	SHANGHAI 2 1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	SHANGHAI 2 1X0010400.04.00




Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Drivers



Driver		Not included
220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	SHANGHAI 2 1Z0240410



Dimmable controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	SHANGHAI 2 1Z0000034

SIMBIOSI

Davide Groppi / 2015



A de-structured chandelier that can be re-assembled as you like.
A conjuring trick that gives you the possibility of connecting the diodes in series using
very weak electric currents with wires that are practically invisible.
The very thin wire that connects the light sources and brings them alive, one in relation
to the other, is the principal component of this project.


SIMBIOSI

Davide Groppi / 2015

Suspension / Direct / Indoor

Material Metal
Finish .03 Matt White .26 Total Black

Note Suspension luminaire. Matt white rose and red cables for the matt white finish. Matt black rose and anthracite grey cables for the matt black finish. AISI 304 stainless steel suspension cables.

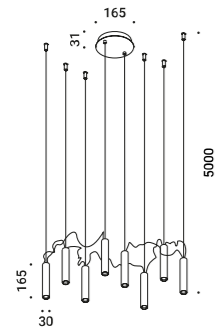

SIMBIOSI

15W

220V - 50/60Hz

2700K - 931lm / 3000K - 960lm

CRI >90

Driver integrated

PUSH

IP20

Matt White - 2700K - PUSH

Matt White - 3000K - PUSH

Total Black - 2700K - PUSH

Total Black - 3000K - PUSH

1A2870308.27.04


1A2870308.30.04

1A2872608.27.04

1A2872608.30.04

Optional accessories

Suspension kits




Sloped ceiling suspension hook

Not included


Chrome plated - 1 Piece

1A0530000.00.00

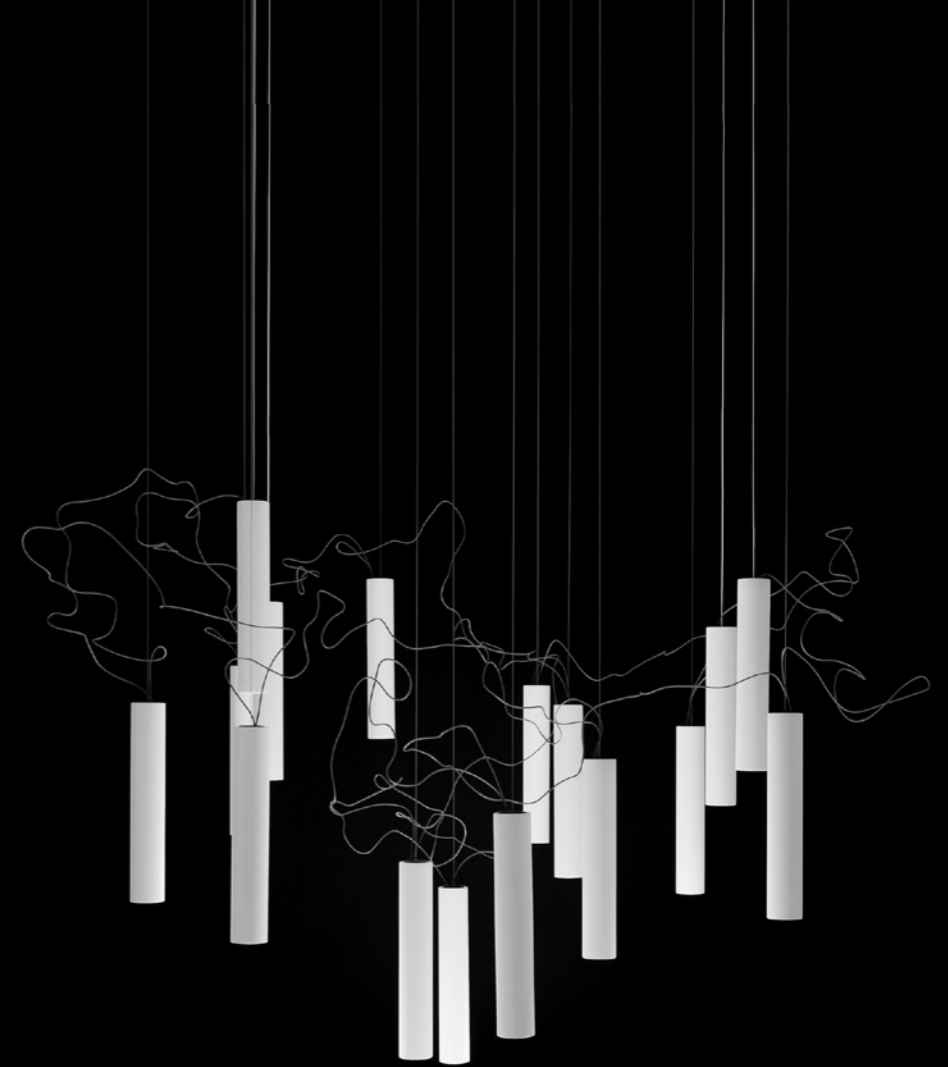

SOTTILE

Daide Groppi / 2023

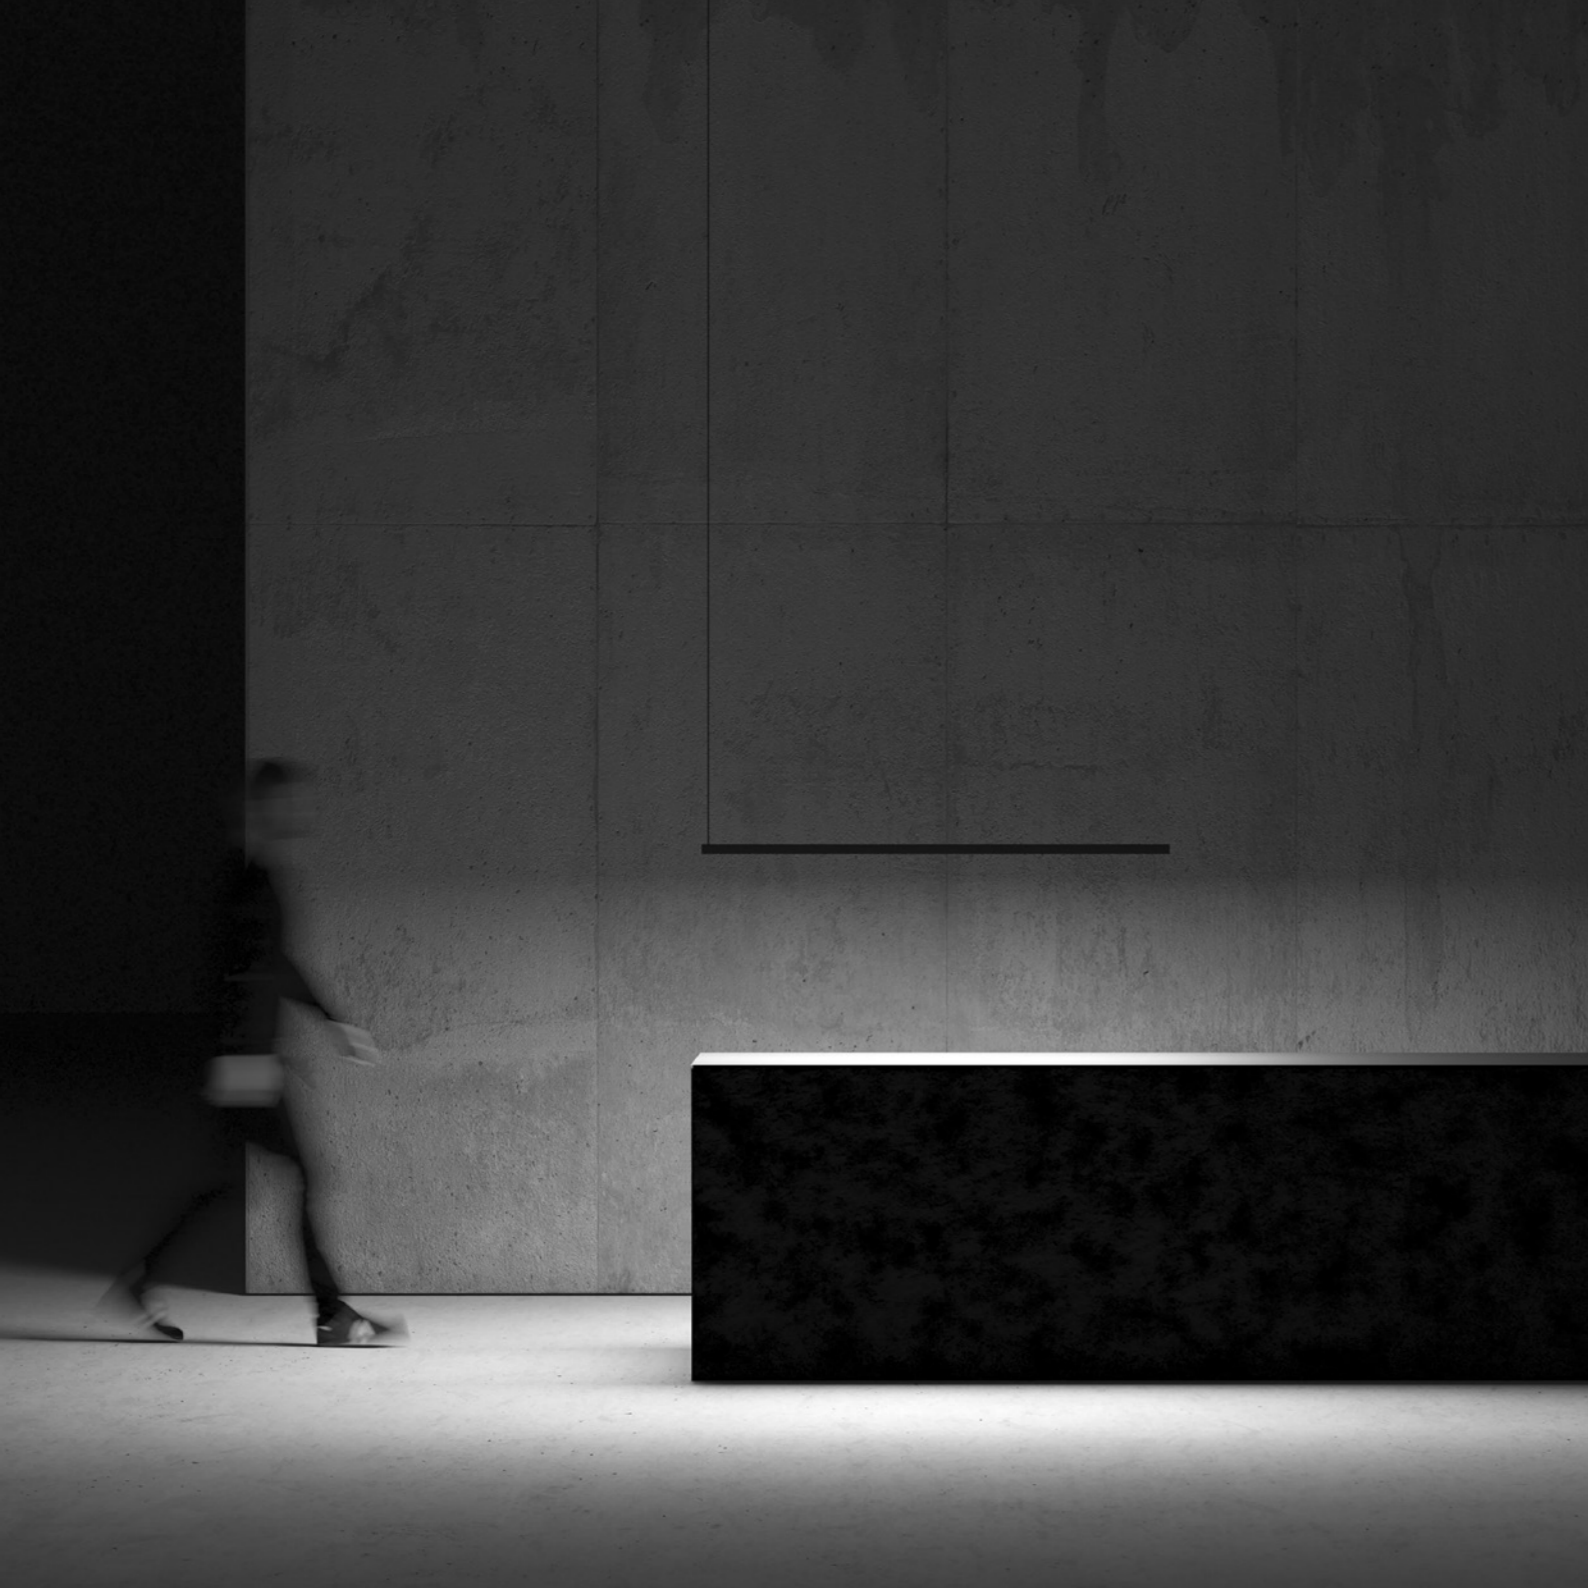


A blade of light just 7 millimetres thick,
the expression of that purest and most essential part of our thought.
The surprise of an extremely thin, yet at the same time very bright, lamp.

Suspension / Direct / Indoor

Material Metal
Finish .29 Brushed Bronze .36 Brushed Black

Note Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cable. Black cable.




SOTTILE 2

Remote driver version
 19W
 24V DC
 2700K - 1692lm / 3000K - 1855lm
 CRI >90
 Driver not included
 IP20

Brushed Bronze - 2700K
 Brushed Bronze - 3000K
 Brushed Black - 2700K
 Brushed Black - 3000K

1A4232908.27.20
 1A4232908.30.20
 1A4233608.27.20
 1A4233608.30.20



SOTTILE 2 DE

Remote driver version - Dual emission
 2x19W
 24V DC
 2700K - Up 1692lm - Down 1692lm /
 3000K - Up 1855lm - Down 1855lm
 CRI >90
 Driver not included
 IP20

Brushed Bronze - 2700K
 Brushed Bronze - 3000K
 Brushed Black - 2700K
 Brushed Black - 3000K

1A4642908.27.20
 1A4642908.30.20
 1A4643608.27.20
 1A4643608.30.20

Optional accessories

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.01.00
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00




Ceiling suspension kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00




Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Drivers



Driver		Not included
100-240V	24V/50W/IP20/ON/OFF	1Z1120490



Dimmable controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034

SOTTOSOPRA

Daide Groppi / 2023

The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.
Sottosopra: pure, elegant, wonderfully efficient.


SOTTOSOPRA

Davide Groppi / 2023

Suspension / Direct-Indirect / Indoor

Material Metal
Finish .03 Matt White

Note Suspension luminaire. Matt white rose. Dual emission and on/off. White cable. SOTTOSOPRA 2: version with power cable only and without rose.

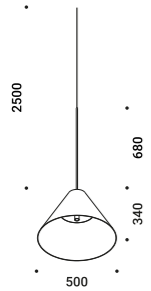

SOTTOSOPRA 2

Remote driver version

30W

Max 500mA DC

2700K - Down 228lm - Up 1827lm /

3000K - Down 245lm - Up 1876lm

CRI >90

UGR <19

Driver not included

2 Drivers required



Matt White - 2700K

Matt White - 3000K

1A4540308.27.20

1A4540308.30.20

Optional accessories

Suspension kits




Recessed suspension kit for 12,5 mm plasterboard

Not included

Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.05.00
------------	-----------------------------------------------------------------------------------------------------	-----------------

Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.05.00
------------	-----------------------------------------------------------------------------------------------------	-----------------

Drivers



Driver

Not included

220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500
--------------------	----------------------------------------------	---------------



WALL

DOT P

Omar Carraglia - Davide Groppi / 2015




A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Wall-Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire. Adjustable in all directions.



DOT P 51

Max 10W - GU10
 220V - 50/60Hz
 ON/OFF
 Bulb not included



Matt White - ON/OFF
 Matt Black - ON/OFF

1A2490308.00.00
 1A2490408.00.00

Optional accessories

Bulbs



LED - GU10 - PAR16

220-240V - 5,5W - 25°
 3000K - 375lm - CRI >97
 Energy Efficiency G - Dimmable

DOT P 51

1Y0330500

Not included



LED SORAA - GU10 - MR16

230V - 7,5W - 10°
 2700K - 390lm - CRI >95
 Energy Efficiency G - Dimmable

DOT P 51

1Y1580210

Not included



LED SORAA - GU10 - MR16

230V - 7,5W - 10°
 3000K - 410lm - CRI >95
 Energy Efficiency G - Dimmable

DOT P 51

1Y1580010

Not included

Other accessories




Darklight

LED SORAA - GU10 - MR16

LED SORAA - GU10

1Y1580040

Not included




25° beam filter

LED SORAA - GU10 - MR16

LED SORAA - GU10

1Y1580020

Not included



36° beam filter

LED SORAA - GU10 - MR16

LED SORAA - GU10

1Y1580030

Not included

EDISON'S NIGHTMARE

Harry Thaler / 2014



A gestural project, full of irony and nostalgia.

Therefore, among a thousand stories, prohibitions, absurd technical rules,
we have reached the end. The end of the incandescent bulb.

Edison's Nightmare is a salute to Edison's light bulb*,
a dream that changed the way we live forever, stealing time to read and write from sleep.

It is a classic light bulb, nailed to the wall. Like a work of art.

** From 01 September 2012, incandescent bulbs cannot be sold in the EU.*


EDISON'S NIGHTMARE

Harry Thaler / 2014

Wall / Diffuse / Indoor

Material Blown glass - Metal
Finish .00 Standard

Note Wall luminaire. Blown glass diffuser. Dimmer on the cable. Transparent cable.



EDISON'S NIGHTMARE


Max 10W - G4 - 12V
 100-240V - 50/60Hz
 Driver not included
 Driver remote
 Bulb included
 ◆ IP20

Standard

| 1A3380008.00.20 |

Optional accessories

Drivers



Driver		Not included
100-240V	12V/20W/IP20/1-10V	1Z0240900





A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind, pulsating and shown at random.

The photographs can be assembled and replaced as you like.

The choice of the message to be communicated is completely personal: it can be an image, a logo, a sentence, anything you want to represent, at any time.

The light message is punctuated by a blinking LED, offering reading in movement.


FILM

Alessandra Dallagiovanna - Davide Groppi / 2010

Objects-Wall / Diffuse / Indoor

Material Metal - Polycarbonate
Finish .00 Standard

Note Modular wall luminaire. Matt black support. Customised images not included. Module connector included. Black cable.

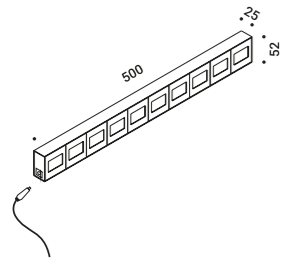


FILM
3W
5V DC
Driver not included
◆ IP20

Standard

| 1A3410008.00.20 |

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Other accessories



USB to JACK 2.1 cable		Not included
	Lenght 0,9m	1Z0280880



MIRA

Omar Carraglia / 2012




Lamp with a simple and essential shape.
For interiors and adjustable.

Wall-Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire. Adjustable in all directions.




MIRA SWITCH

8W
 220V - 50Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 ON/OFF
IP20

Matt White - 2700K - ON/OFF
 Matt White - 3000K - ON/OFF
 Matt Black - 2700K - ON/OFF
 Matt Black - 3000K - ON/OFF

1A2280308.27.00
 1A2280308.30.00
 1A2280408.27.00
 1A2280408.30.00




MIRA

8W
 220V - 50Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 DALI
IP20

Matt White - 2700K - DALI
 Matt White - 3000K - DALI
 Matt Black - 2700K - DALI
 Matt Black - 3000K - DALI

1A2280308.27.01
 1A2280308.30.01
 1A2280408.27.01
 1A2280408.30.01



MIRA

8W
 220V - 50Hz
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver integrated
 PUSH

IP20

Matt White - 2700K - PUSH
 Matt White - 3000K - PUSH
 Matt Black - 2700K - PUSH
 Matt Black - 3000K - PUSH

1A2280308.27.04
 1A2280308.30.04
 1A2280408.27.04
 1A2280408.30.04

MIRA MAGNETIC

Omar Carraglia / 2015



Lamp with a simple and essential shape.
For interiors and adjustable, it is designed with a magnetic application system
to be even more versatile and functional.


MIRA MAGNETIC

Omar Carraglia / 2015

Wall-Ceiling / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Wall luminaire. Adjustable in all directions. Magnetic fixing. Dimmer on the cable. White cable.



MIRA MAGNETIC


5,6W
 Max 500mA DC
 2700K - 327lm / 3000K - 352lm
 CRI >90
 Driver not included
 IP20

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K


1A3680308.27.20
 1A3680308.30.20
 1A3680408.27.20
 1A3680408.30.20

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 220V - 50Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180408.00.06
Matt White	Input 220V - 50Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180308.00.06



Driver		Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH	1Z0240840.500



MORSETTO P

Daide Groppi / 2019



A lamp that can be positioned, balanced and turned,
but overall it produces a beautiful light on the table.
It's the wall version of the Morsetto lamp.
Three adjustable arms allow the light source to be positioned
far from where the lamp is attached.
Table version also available.


MORSETTO P

Davide Groppi / 2019

Wall / Direct / Indoor

Material Metal
Finish .04 Matt Black

Note Wall luminaire. Adjustable in all directions. Dimmer on the cable.
Black cable.

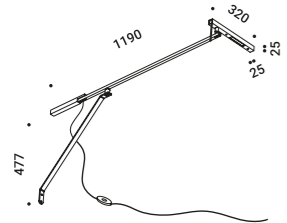

MORSETTO P

13W
24V DC
2700K - 700lm / 3000K - 753lm
CRI >90
UGR <19
Dimmer on board
Driver with plug not included


IP20

Matt Black - 2700K - Dimmer on board
Matt Black - 3000K - Dimmer on board

1A2570408.27.06
1A2570408.30.06

Optional accessories

Drivers




Driver with plug

Matt Black
Input 110-240V - 50/60Hz
Output 24V DC - 18W - IP20

Not included

1Z0431020



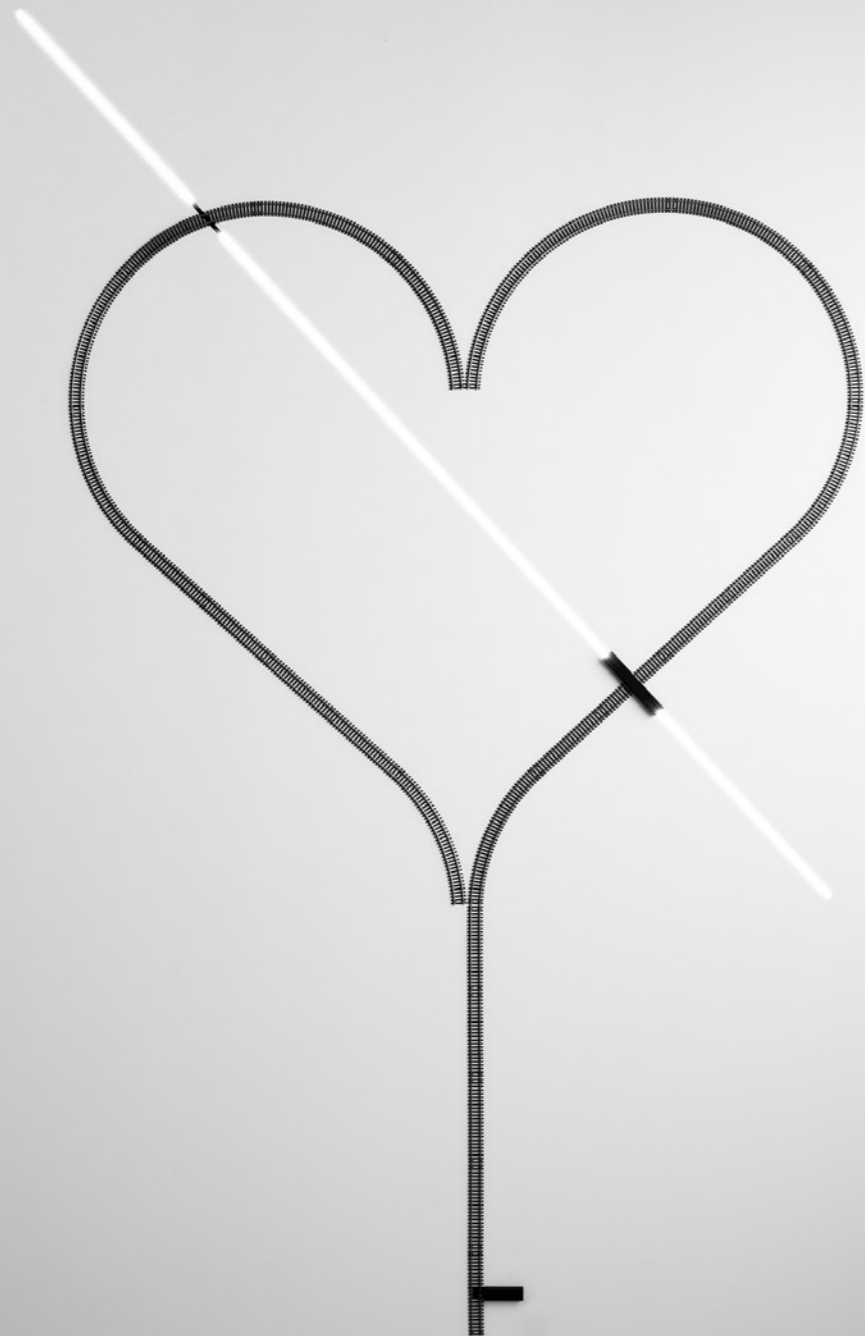

A ready-made project to design the space with a sense of irony and weightlessness. The tracks of an electric train can be used to draw a heart, but also to conduct electricity. Rail is the boundary between usefulness and show, between art and design.


RAIL

Davide Groppi / 2019

Wall / Direct / Indoor

Material ABS - Metal
Finish .00 Standard

Note Wall luminaire. Matt black modular tracks. Dimmer on the cable.
Black cable.

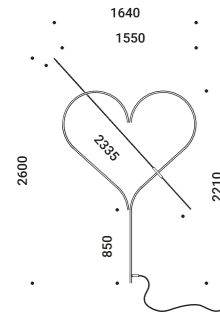


RAIL
22W
24V DC
3000K - 2000lm
CRI >90
Driver not included
◆ IP20

Standard - 3000K


| 1A3400008.30.20 |

Optional accessories

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

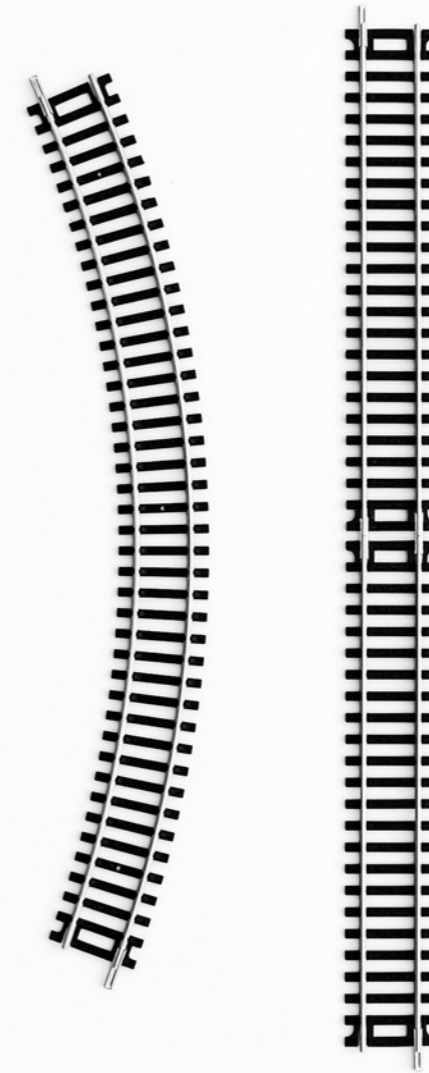



REFLEX

Michele Groppi / 2022

A powerful LED and a subtle mirror.
A magic and almost invisible lighting solution,
which provides an indirect light that multiplies spaces
and gives the eye unprecedented perspectives,
unexpected depths, illusions of light.
Suspension version also available.


REFLEX

Michele Groppi / 2022

Wall / Indirect / Indoor

Material Metal - Mirror
Finish .04 Matt Black

Note Wall luminaire. Plane with mirror finish. Matt black rear plane.



REFLEX


18W
 24V DC
 2700K - 2158lm / 3000K - 2320lm
 CRI >90
 Driver not included
 IP20

Matt Black - 2700K
 Matt Black - 3000K


1A0850408.27.20
 1A0850408.30.20

Optional accessories

Drivers



Driver		Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260



Dimmable controller		Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034



TOAST

Daide Groppi - Alberto Zattin / 2001




The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.

TOAST

Davide Groppi - Alberto Zattin / 2001

Wall / Diffuse / Indoor

Material	Glass - Metal			
Finish	.01 Polished Chrome	.03 Matt White	.04 Matt Black	.08 Brushed Brass
	.14 Brushed Chrome			
Note	Wall luminaire. Dual emission.			



TOAST

Max 100W - R7s

220V - 50/60Hz

ON/OFF

Bulb not included

IP20 0,5 m

Polished Chrome - ON/OFF

Matt White - ON/OFF

Matt Black - ON/OFF

Brushed Brass - ON/OFF

Brushed Chrome - ON/OFF

1A3290108.00.00

1A3290308.00.00

1A3290408.00.00

1A3290808.00.00

1A3291408.00.00



CEILING



ASINTOTO


Daide Groppi / 2023

Abstraction, purity, graphic sign.
The projected reduction of Infinito.
The disc appears enigmatic, the symbolic presence of the absence of light.

Ceiling / Indirect / Indoor

Material Metal - Methacrylate
Finish .27 Gravity Black

Note Ceiling luminaire. Disc with gravity black finish. Magnetic weight available for disc tilting. Black cable.



ASINTOTO


18W
 Max 500mA DC
 2700K - 1435lm / 3000K - 1478lm
 CRI >90
 Driver not included
 IP20

Gravity Black - 2700K
 Gravity Black - 3000K

1A4072708.27.20
 1A4072708.30.20

Optional accessories

Installation kits



Circular plasterboard panel 12,5 mm		Not included
Standard	Cut-out 400x400 mm Minimum space for mounting Ø 115 mm	1A4520000.00.00

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For electrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00




Ceiling suspension kit		Not included
Matt White	For electrical cables - 1 Piece	1X0010300.04.00
Matt Black	For electrical cables - 1 Piece	1X0010400.04.00



Wall adapter plate		Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00

Drivers



Driver		Not included
220-240V(100-127V)	500mA/35W(35W)/IP20/DALI	1Z0241140.500

Other accessories



Magnetic weight		Not included
Matt Black	For sloped installation	1A4710400.00.00

RECESSED

DOT R

Omar Carraglia - Davide Groppi / 2015




A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 85 mm.



DOT R

13W
 Max 350mA DC
 2700K / 3000K
 CRI >97
 Driver not included

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A4770308.27.20
 1A4770308.30.20
 1A4770408.27.20
 1A4770408.30.20

Compulsory accessories


Other accessories




Lens		Not included
Beam - 14°	2700K - CRI >97 - 983lm	1A3090000.00.00
	3000K - CRI >97 - 1038lm	
Beam - 24°	2700K - CRI >97 - 943lm	1A3100000.00.00
	3000K - CRI >97 - 996lm	
Beam - 36°	2700K - CRI >97 - 955lm	1A3110000.00.00
	3000K - CRI >97 - 1005lm	
Beam - 50°	2700K - CRI >97 - 965lm	1A3120000.00.00
	3000K - CRI >97 - 1016lm	

Optional accessories


Drivers



Driver		Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	1Z0240860.350



Driver		Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	1Z0240840.350




Driver		Not included
220-240V	350mA/18W/IP20/TRIAC/IGBT	1Z0240740


Other accessories




Accessory holder + Honeycomb louvre		Not included
		1X0080400.01.00




Elliptical filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.02.00



Blue filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.03.00




Red filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.04.00



Yellow filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.05.00

MIRA R

Omar Carraglia / 2015

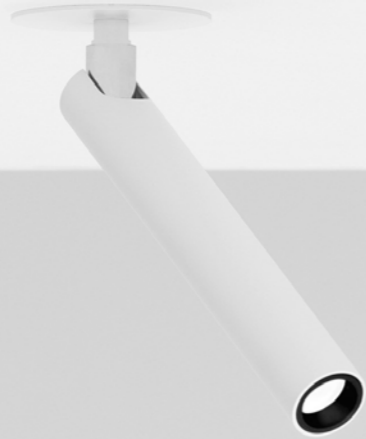

A tool to light.

The luminaire is pure form, a simple container for the light source.
Light is incorporated into the space, becoming an architectural element.


MIRA R

Omar Carraglia / 2015

Recessed / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40 mm. Minimum space for recessed installation: 85 mm.



MIRA R


5,6W
Max 500mA DC
2700K - 327lm / 3000K - 352lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 3000K
Matt Black - 2700K


1A3690308.27.20
1A3690308.30.20
1A3690408.30.20
1A3690408.27.20

Optional accessories

Drivers



Driver	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/DALI	1Z0240860.500



Driver	Not included
220-240V(100-127V) 500mA/20W(15W)/IP20/PUSH	1Z0240840.500





An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light.

It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source. It's the end in that every time

we look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

XXIII Compasso d'Oro ADI Award, 2014


Compasso d'Oro ADI
Award 2014



Recessed / Direct / Indoor

Material Metal
Finish .00 Standard

Note Recessed luminaire. Visible 18 / 25 mm diameter hole. NULLA 18 and NULLA 25: lamp extractable for maintenance.




NULLA - 23°

14W
 24V DC
 2700K - 425lm / 3000K - 458lm
 CRI >90
 Beam 23°
 UGR <19
 Driver not included

◆ IP20/IP65

Standard - 2700K
 Standard - 3000K

1A4100008.27.20
 1A4100008.30.20




NULLA - 32°

14W
 24V DC
 2700K - 538lm / 3000K - 579lm
 CRI >90
 Beam 32°
 UGR <19
 Driver not included

◆ IP20/IP65

Standard - 2700K
 Standard - 3000K

1A2110008.27.20
 1A2110008.30.20




NULLA 18 - 20°

4,5W
 24V DC
 2700K - 174lm / 3000K - 186lm
 CRI >90
 Beam 20°
 UGR <19
 Driver not included

◆ IP20

Standard - 2700K
 Standard - 3000K

1A2010008.27.20
 1A2010008.30.20



NULLA 25 - 23°

9W
 24V DC
 2700K - 304lm / 3000K - 327lm
 CRI >90
 Beam 23°
 UGR <19
 Driver not included

◆ IP20/IP65

Standard - 2700K
 Standard - 3000K

1A2020008.27.20
 1A4080008.30.20



NULLA 25 - 32°

9W
 24V DC
 2700K - 384lm / 3000K - 413lm
 CRI >90
 Beam 32°
 UGR <19
 Driver not included

◆ IP20/IP65

Standard - 2700K
 Standard - 3000K


1A2020008.27.20
 1A2020008.30.20

Compulsory accessories


Installation kits



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 21 mm Minimum space for mounting 100 mm IP65	NULLA	1A2200400.00.00



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 190 mm	NULLA 25	1A2170400.00.00



Plasterboard flange 12,5 mm Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A3980400.00.00




Plasterboard flange (bottom) ≠ 12,5 mm Not included			
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 145 mm IP65	NULLA 25	1A4960400.00.00

Optional accessories


Installation kits




Trapdoor for plasterboard 12,5 mm Not included			
Standard	Cut-out 205x205 mm	NULLA	1A3780000.00.00




Trapdoor for plasterboard 12,5 mm Not included			
Standard	Cut-out 415x415 mm	NULLA	1A3790000.00.00




Masonry Box Not included			
Standard		NULLA 18	1A2390000.00.00



Concrete box Not included			
Standard		NULLA 18	1A2240000.00.00




Masonry Box Not included			
Standard		NULLA 25	1A2380000.00.00




Concrete box Not included			
Standard		NULLA 25	1A2230000.00.00


Drivers

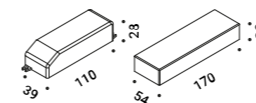


Driver + Controller Not included			
220-240V(100-127V)	24V/22W(12W)/IP20/TRIAC/IGBT		1Z0240410 + 1Z0000034

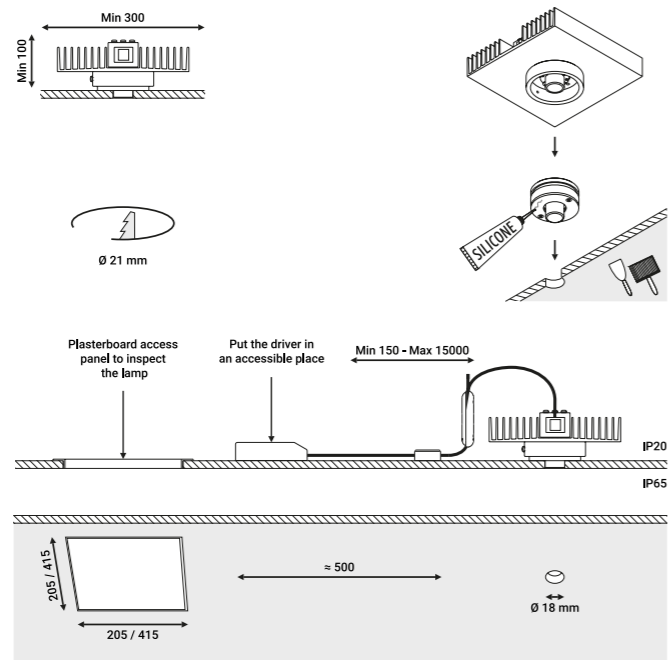

NULLA installation conditions

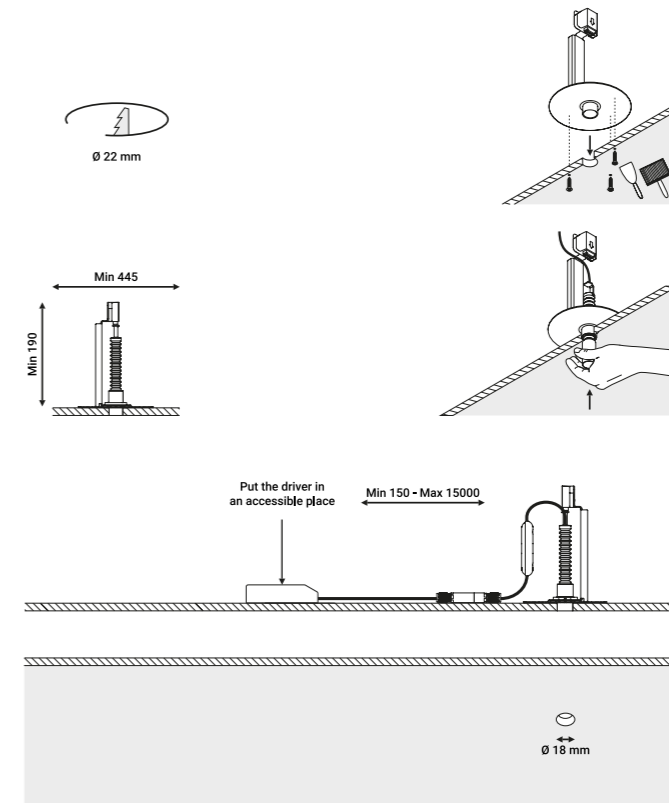

NULLA 18 installation conditions

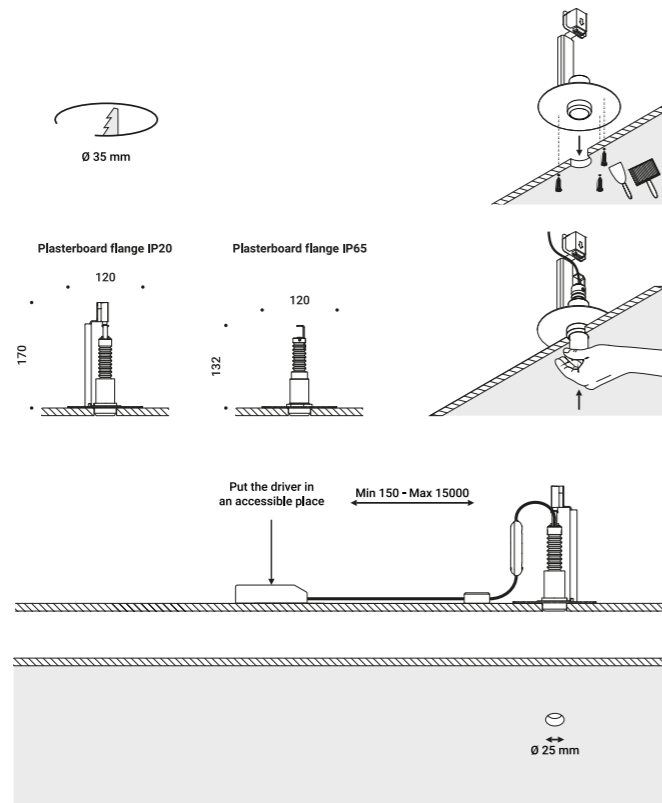

NULLA 25 installation conditions



SYSTEMS




FLASH


Davide Groppi / 2017

It is our Infinito model turned around, with the light flowing downwards.
The 9 mm wide stainless steel strip can run perfectly up to 36 metres in length
(standard versions at 6 / 12 / 18 metres in length).
The ideal solution for direct illumination of spaces with very high ceilings.
Its name pays homage to the famous comic book superhero,
who can run seven times the speed of light.


How to order - FLASH 6

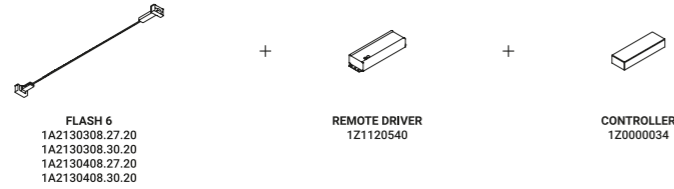

How to order - FLASH 12

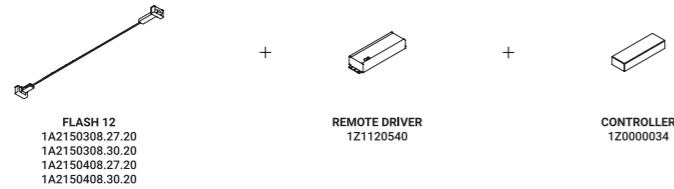

How to order - FLASH 18

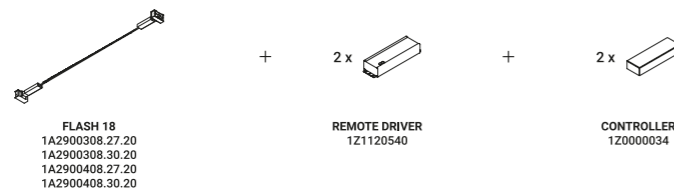

Wall-Systems / Direct / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black

Note Special stainless steel tape (9 mm) running from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Dual emission (DE) and Tunable White (TW - 5 / 10 m) versions. LED strip that can be divided every 96,6 mm. DE versions are available with dual on/off (two drivers required).

FLASH 6
45W
24V DC
2700K - 5586lm / 3000K - 6708lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K	1A2130308.27.20
Matt White - 3000K	1A2130308.30.20
Matt Black - 2700K	1A2130408.27.20
Matt Black - 3000K	1A2130408.30.20

FLASH 12
90W
24V DC
2700K - 11172lm / 3000K - 13416lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K	1A2150308.27.20
Matt White - 3000K	1A2150308.30.20
Matt Black - 2700K	1A2150408.27.20
Matt Black - 3000K	1A2150408.30.20

FLASH 18
135W
24V DC
2700K - 16758lm / 3000K - 20124lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K	1A2900308.27.20
Matt White - 3000K	1A2900308.30.20
Matt Black - 2700K	1A2900408.27.20
Matt Black - 3000K	1A2900408.30.20

How to order -
FLASH 6 DE



FLASH 6 DE
1A1290308.27.20
1A1290308.30.20
1A1290408.27.20
1A1290408.30.20

+



REMOTE DRIVER
1Z1120540

+



CONTROLLER
1Z0000034

How to order -
FLASH 12 DE



FLASH 12 DE
1A1300308.27.20
1A1300308.30.20
1A1300408.27.20
1A1300408.30.20

+




REMOTE DRIVER
1Z1120540

+



CONTROLLER
1Z0000034

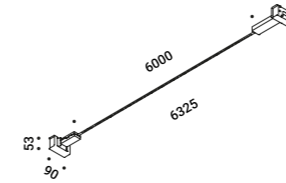


FLASH 6 DE

Dual emission
90W
24V DC
2700K - Up 5586lm - Down 5586lm /
3000K - Up 6708lm - Down 6708lm
CRI >90
Driver not included

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1290308.27.20
1A1290308.30.20
1A1290408.27.20
1A1290408.30.20

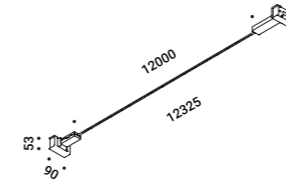


FLASH 12 DE

Dual emission
180W
24V DC
2700K - Up 11172lm - Down 11172lm /
3000K - Up 13416lm - Down 13416lm
CRI >90
Driver not included


Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A1300308.27.20
1A1300308.30.20
1A1300408.27.20
1A1300408.30.20

How to order -
FLASH 5 TW

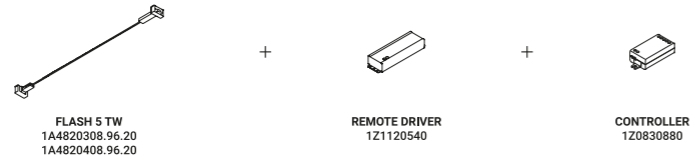

How to order -
FLASH 10 TW

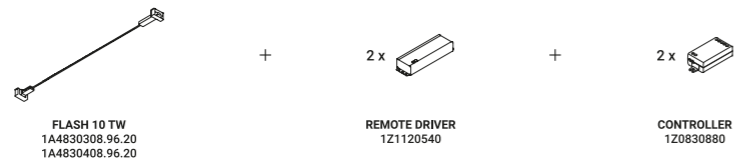


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.



FLASH 5 TW
Tunable White
50W
24V DC
2700K / 6500K - 7650lm
CRI >90
Driver not included
IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4820308.96.20
1A4820408.96.20

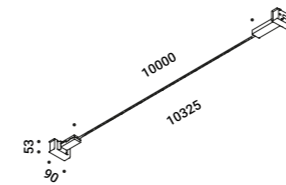


FLASH 10 TW
Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
IP20


Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4830308.96.20
1A4830408.96.20


How to order -
FLASH 5 DE TW

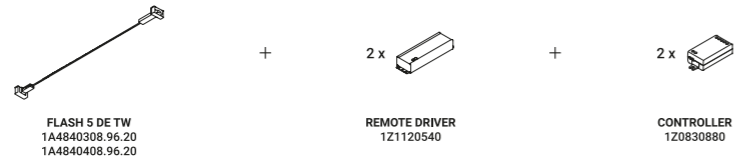

How to order -
FLASH 10 DE TW

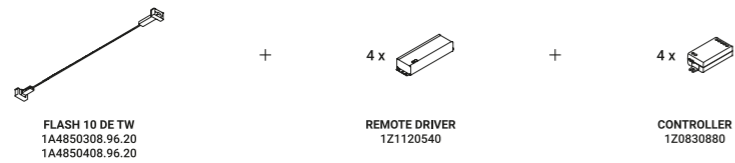


Note Tunable White describes the variable colour temperature controls from warm white to cool white light.

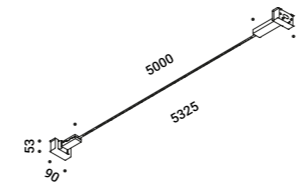

FLASH 5 DE TW
Dual emission - Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4840308.96.20
1A4840408.96.20

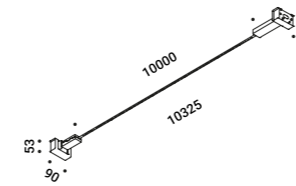


FLASH 10 DE TW
Dual emission - Tunable White
200W
24V DC
2700K / 6500K - 30600lm
CRI >90
Driver not included
◆ IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K


1A4850308.96.20
1A4850408.96.20

Optional accessories


Installation kits




Ceiling installation kit	Not included
Matt Black	1A0080400.00.00



Kit wall connection vertical sloped 45°	Not included
Matt Black	1A0120400.00.00



Kit wall connection sloped right 75°	Not included
Matt Black	1A0340400.00.00




Kit wall connection sloped left 75°	Not included
Matt Black	1A0350400.00.00




Swallows	Not included
Matt Black	1A0800400.00.00

Optional accessories


Drivers




Driver	Not included		
100-240V	24V/96W/IP67/1-10V	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE / FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z1120540




Dimmable controller	Not included		
	DALI - PUSH - 0/1-10V - TRIAC - IP20	FLASH 6 / FLASH 12 / FLASH 18 / FLASH 6 DE / FLASH 12 DE	1Z0000034




Controller Casambi - Tunable White	Not included		
		FLASH 5 TW / FLASH 10 TW / FLASH 5 DE TW / FLASH 10 DE TW	1Z0830880

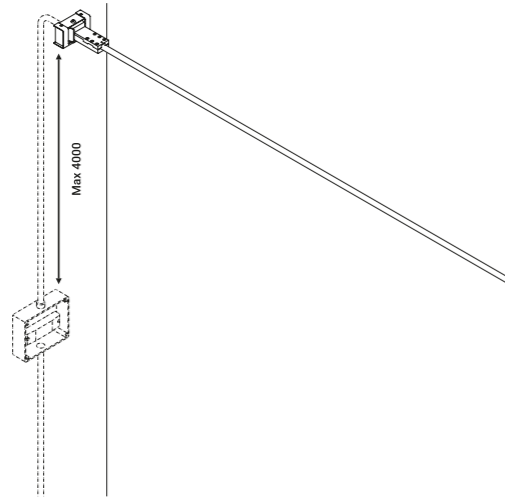


Example of installation with remote driver

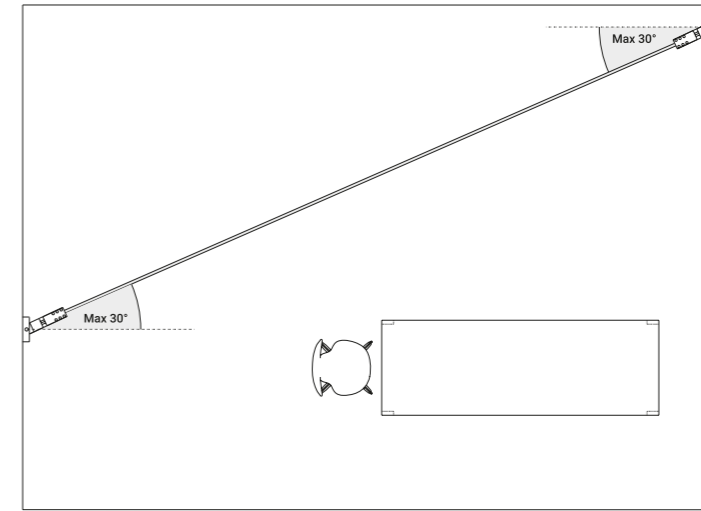


Example of installation with max rotation 30°

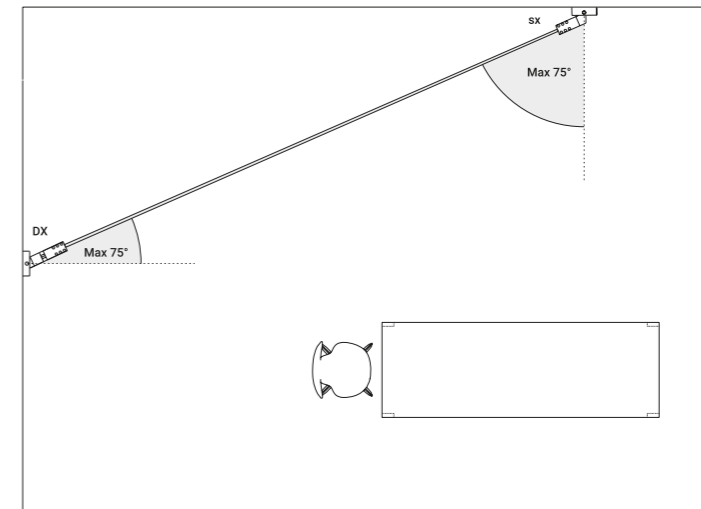


1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

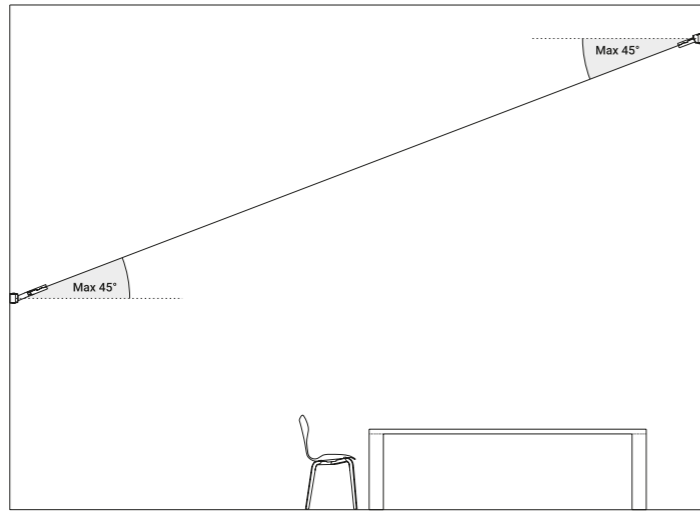

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

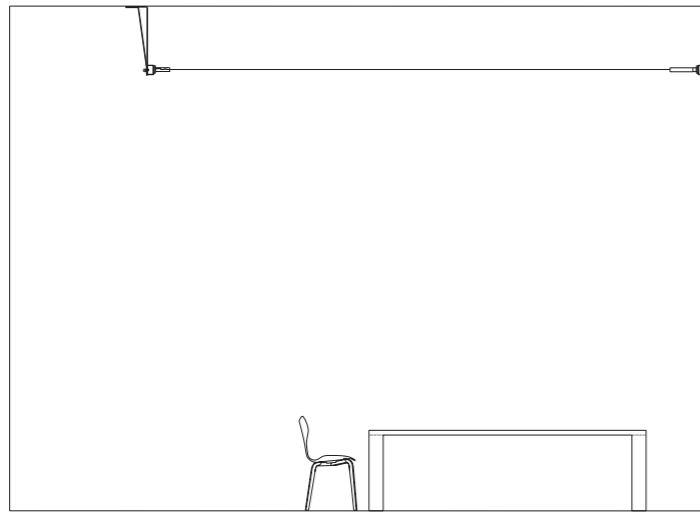

1A0080400.00.00 - Example of installation with ceiling installation kit

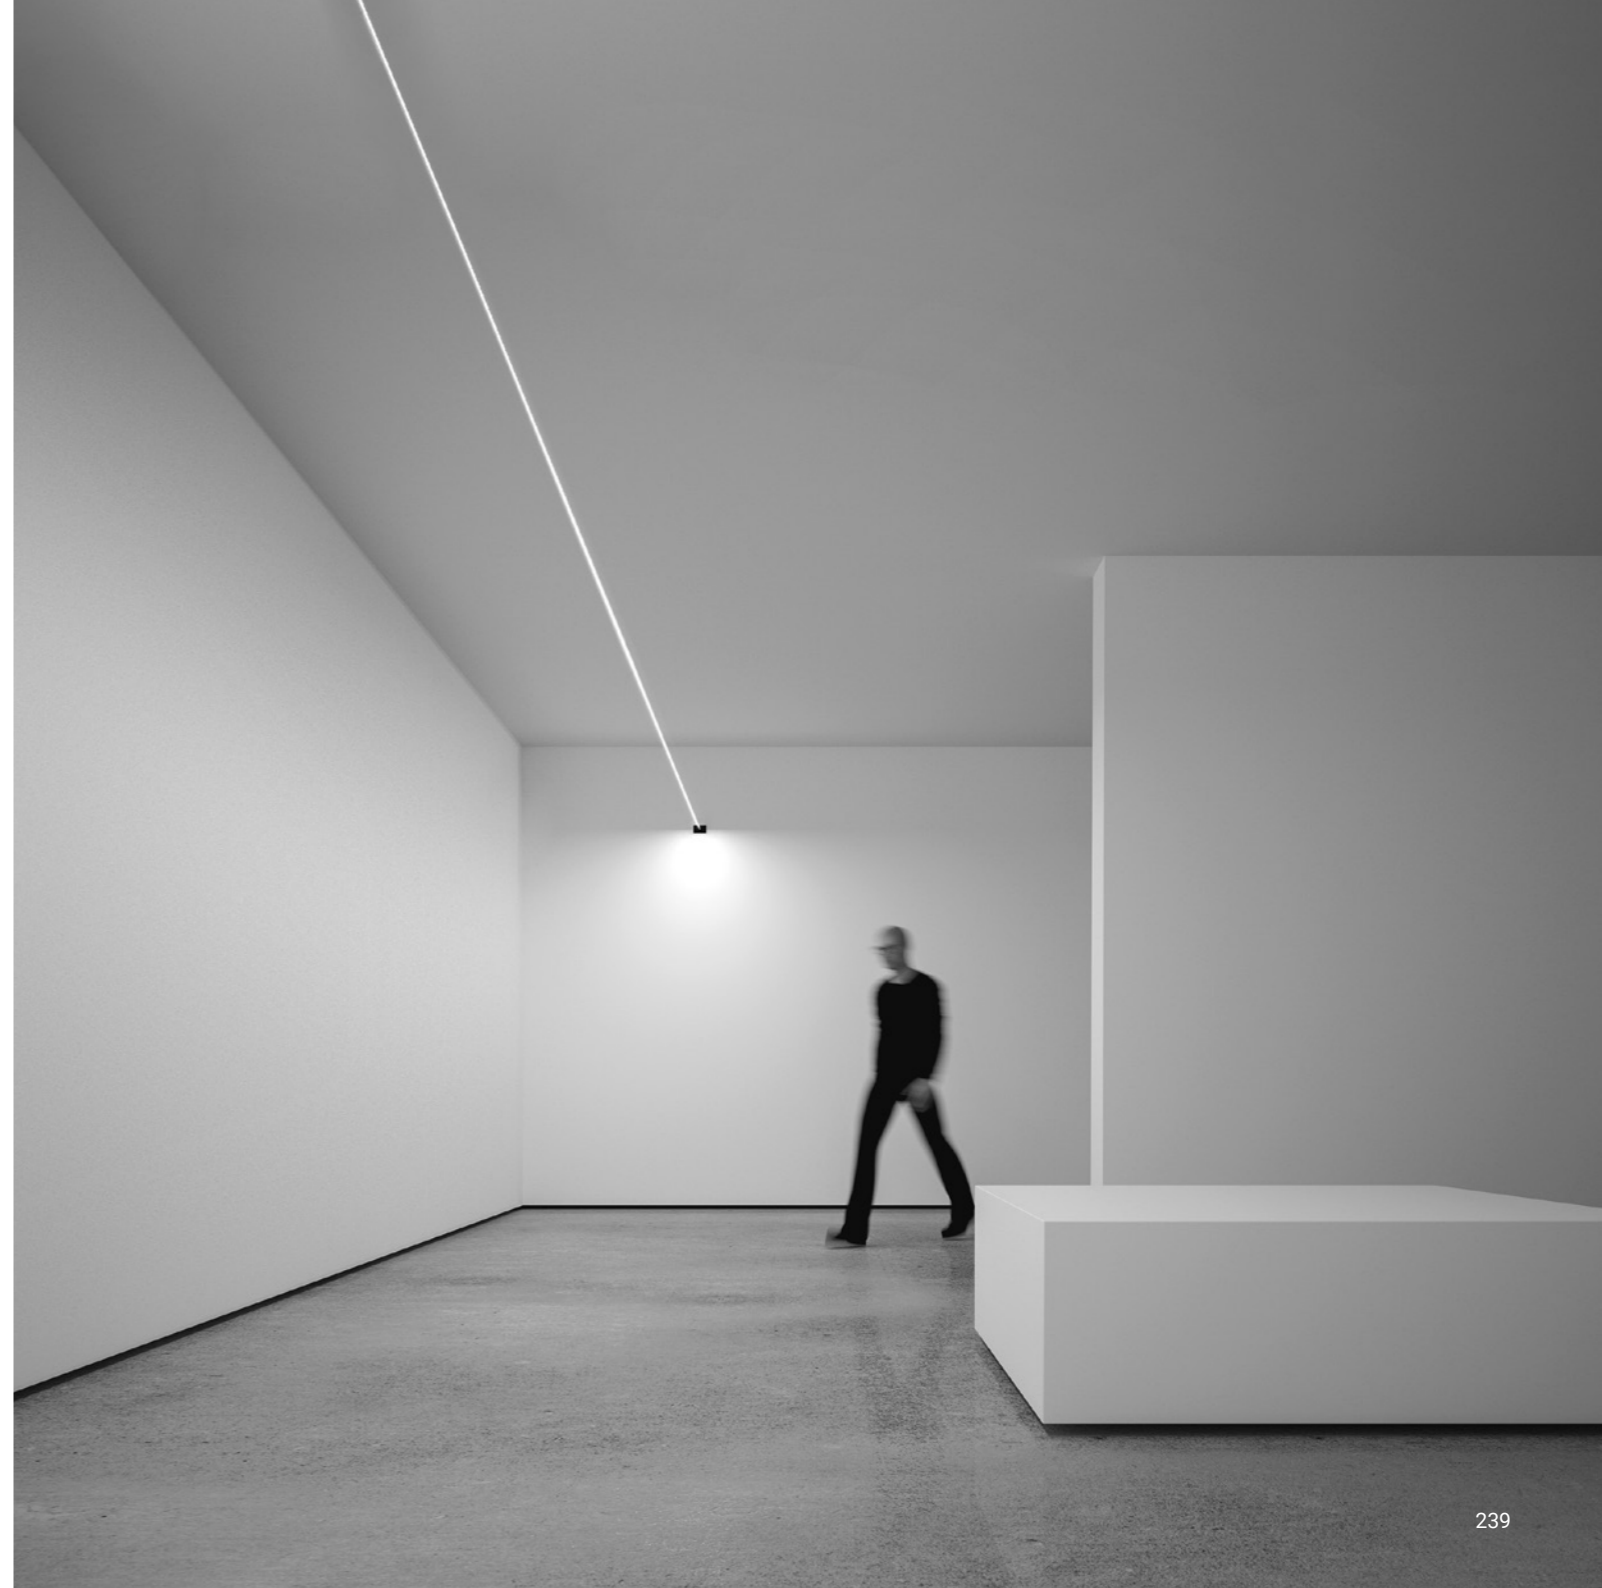



INFINITO

Davide Groppi / 2016

A spatial concept, it is continuous light.


An ultra-thin strip of special stainless steel just 18 mm wide "cuts" the space to produce indirect light. Infinito can be adapted to various situations, stretched from wall to wall or ceiling to floor. It comes in strips up to 36 metres in length (standard versions at 6 / 12 / 18 metres in length). Infinito breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light. This project pays homage to the art of Lucio Fontana and his spatial concepts.

The graphic force of this system is surprising. It can be integrated into space, but at the same time it becomes part of that space. Infinito: essence and absence.

Archiproducts Design Award 2017

People's Choice AZ Award 2017

How to order - INFINITO 6

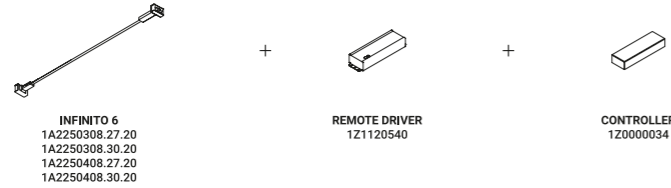


INFINITO 6
1A2250308.27.20
1A2250308.30.20
1A2250408.27.20
1A2250408.30.20

REMOTE DRIVER
1Z1120540

CONTROLLER
1Z0000034

How to order - INFINITO 12

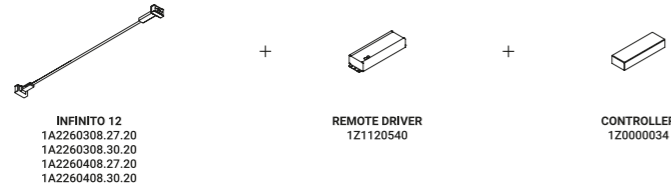


INFINITO 12
1A2260308.27.20
1A2260308.30.20
1A2260408.27.20
1A2260408.30.20

REMOTE DRIVER
1Z1120540

CONTROLLER
1Z0000034

How to order - INFINITO 18

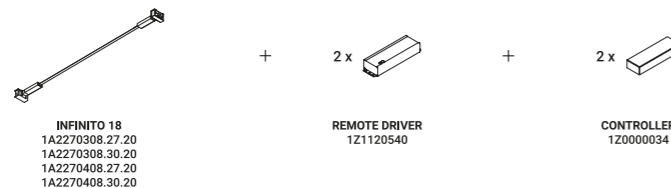

INFINITO 18
1A2270308.27.20
1A2270308.30.20
1A2270408.27.20
1A2270408.30.20


REMOTE DRIVER
1Z1120540

CONTROLLER
1Z0000034

Wall-Systems / Indirect / Indoor

Material Metal
Finish .03 Matt White .04 Matt Black


Note Special stainless steel tape (18 mm) stretched from wall to wall.
Available in 6 / 12 / 18 m with a single power unit and uniform lighting.
Available in Tunable White (TW - 5 / 10 m) version.
LED strip that can be divided every 96,6 mm.

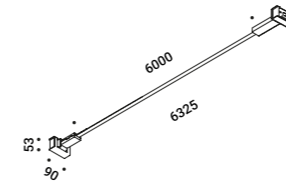

INFINITO 6
45W
24V DC
2700K - 5586lm / 3000K - 6708lm
CRI >90
Driver not included
IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K


1A2250308.27.20
1A2250308.30.20
1A2250408.27.20
1A2250408.30.20

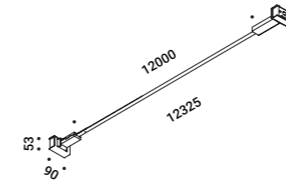

INFINITO 12
90W
24V DC
2700K - 11172lm / 3000K - 13416lm
CRI >90
Driver not included
IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A2260308.27.20
1A2260308.30.20
1A2260408.27.20
1A2260408.30.20

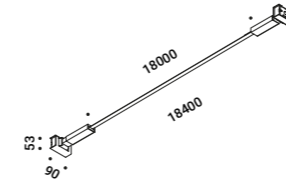

INFINITO 18
135W
24V DC
2700K - 16758lm / 3000K - 20124lm
CRI >90
Driver not included
IP20

Matt White - 2700K
Matt White - 3000K
Matt Black - 2700K
Matt Black - 3000K

1A2270308.27.20
1A2270308.30.20
1A2270408.27.20
1A2270408.30.20

How to order -
INFINITO 5 TW



INFINITO 5 TW
1A4860308.96.20
1A4860408.96.20

+



REMOTE DRIVER
1Z1120540

+



CONTROLLER
1Z0830880

How to order -
INFINITO 10 TW



INFINITO 10 TW
1A4870308.96.20
1A4870408.96.20

+




2 x
REMOTE DRIVER
1Z1120540

+



2 x
CONTROLLER
1Z0830880

Note Tunable White describes the variable colour temperature controls from warm white to cool white light.

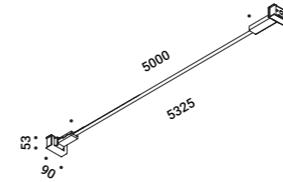


INFINITO 5 TW

Tunable White
50W
24V DC
2700K / 6500K - 7650lm
CRI >90
Driver not included
IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K

1A4860308.96.20
1A4860408.96.20

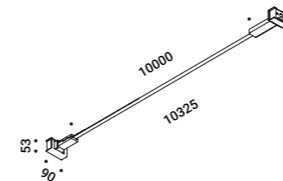

INFINITO 10 TW


Tunable White
100W
24V DC
2700K / 6500K - 15300lm
CRI >90
Driver not included
IP20

Matt White - 2700K / 6500K
Matt Black - 2700K / 6500K


1A4870308.96.20
1A4870408.96.20

Optional accessories


Installation kits




Ceiling installation kit	Not included
Matt Black	1A0080400.00.00



Kit wall connection vertical sloped 45°	Not included
Matt Black	1A0120400.00.00



Kit wall connection sloped right 75°	Not included
Matt Black	1A0340400.00.00




Kit wall connection sloped left 75°	Not included
Matt Black	1A0350400.00.00




Swallows	Not included
Matt Black	1A0290400.00.00

Optional accessories


Drivers




Driver	Not included
100-240V	24V/96W/IP67/1-10V
	INFINITO 6 / INFINITO 12 / 1Z1120540
	INFINITO 18 /
	INFINITO 5 TW /
	INFINITO 10 TW




Dimmable controller	Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20
	INFINITO 6 / INFINITO 12 / 1Z0000034
	INFINITO 18




Controller Casambi - Tunable White	Not included
	INFINITO 5 TW /
	INFINITO 10 TW
	1Z0830880

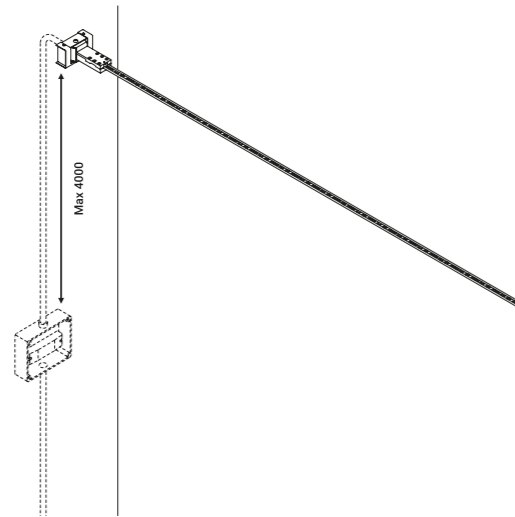


Example of installation with remote driver

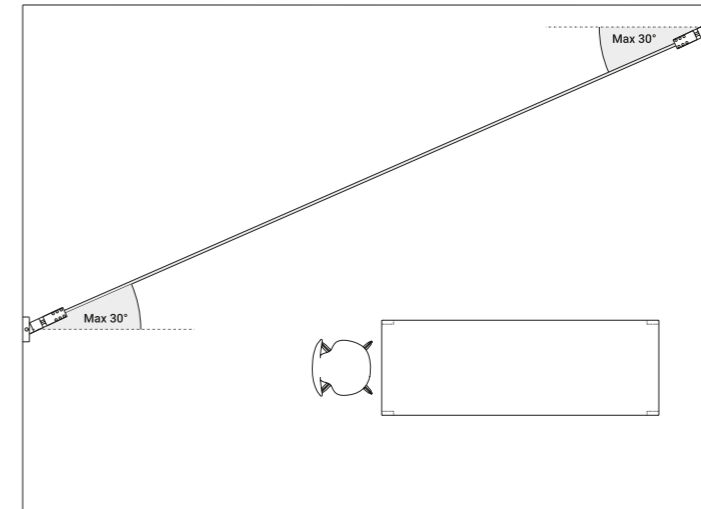


Example of installation with max rotation 30°

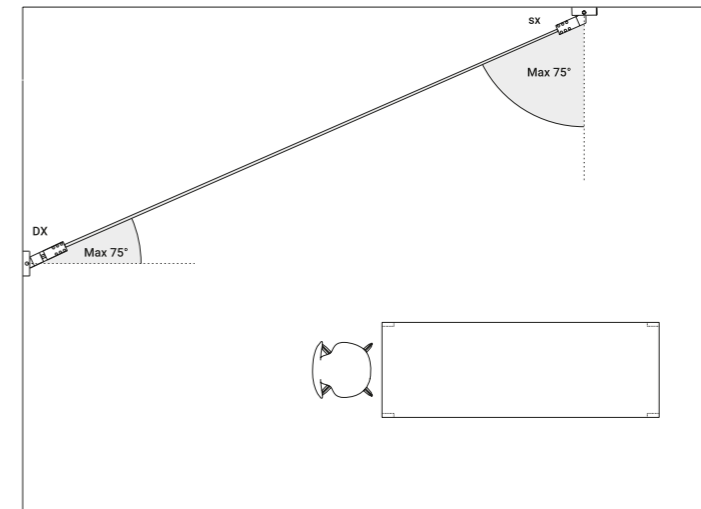

1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

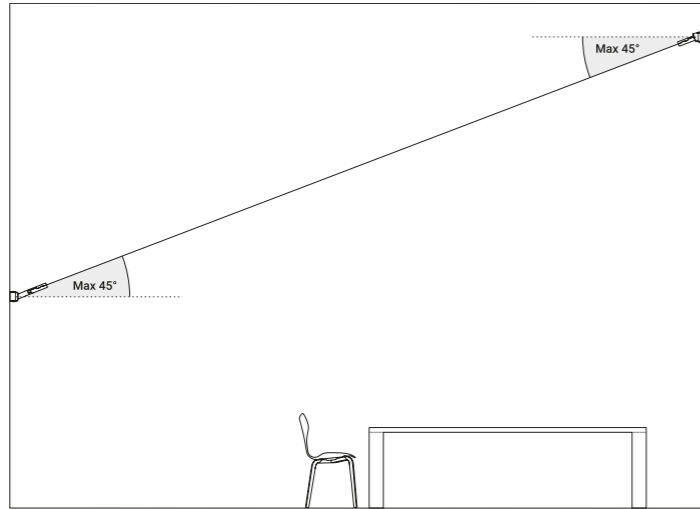


1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

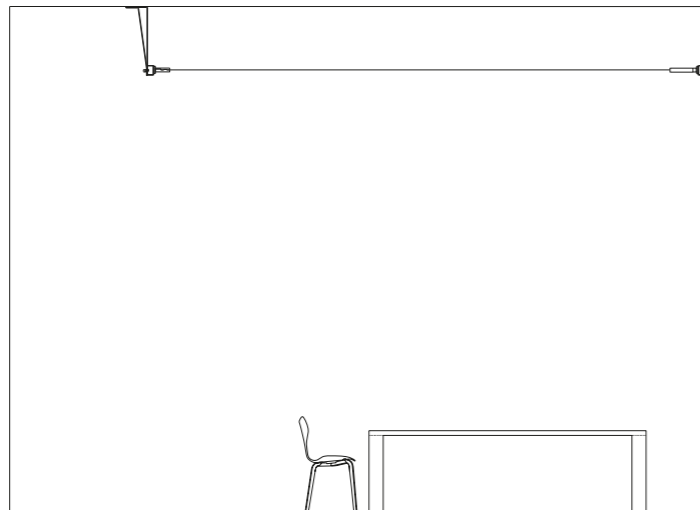


1A0080400.00.00 - Example of installation with ceiling installation kit



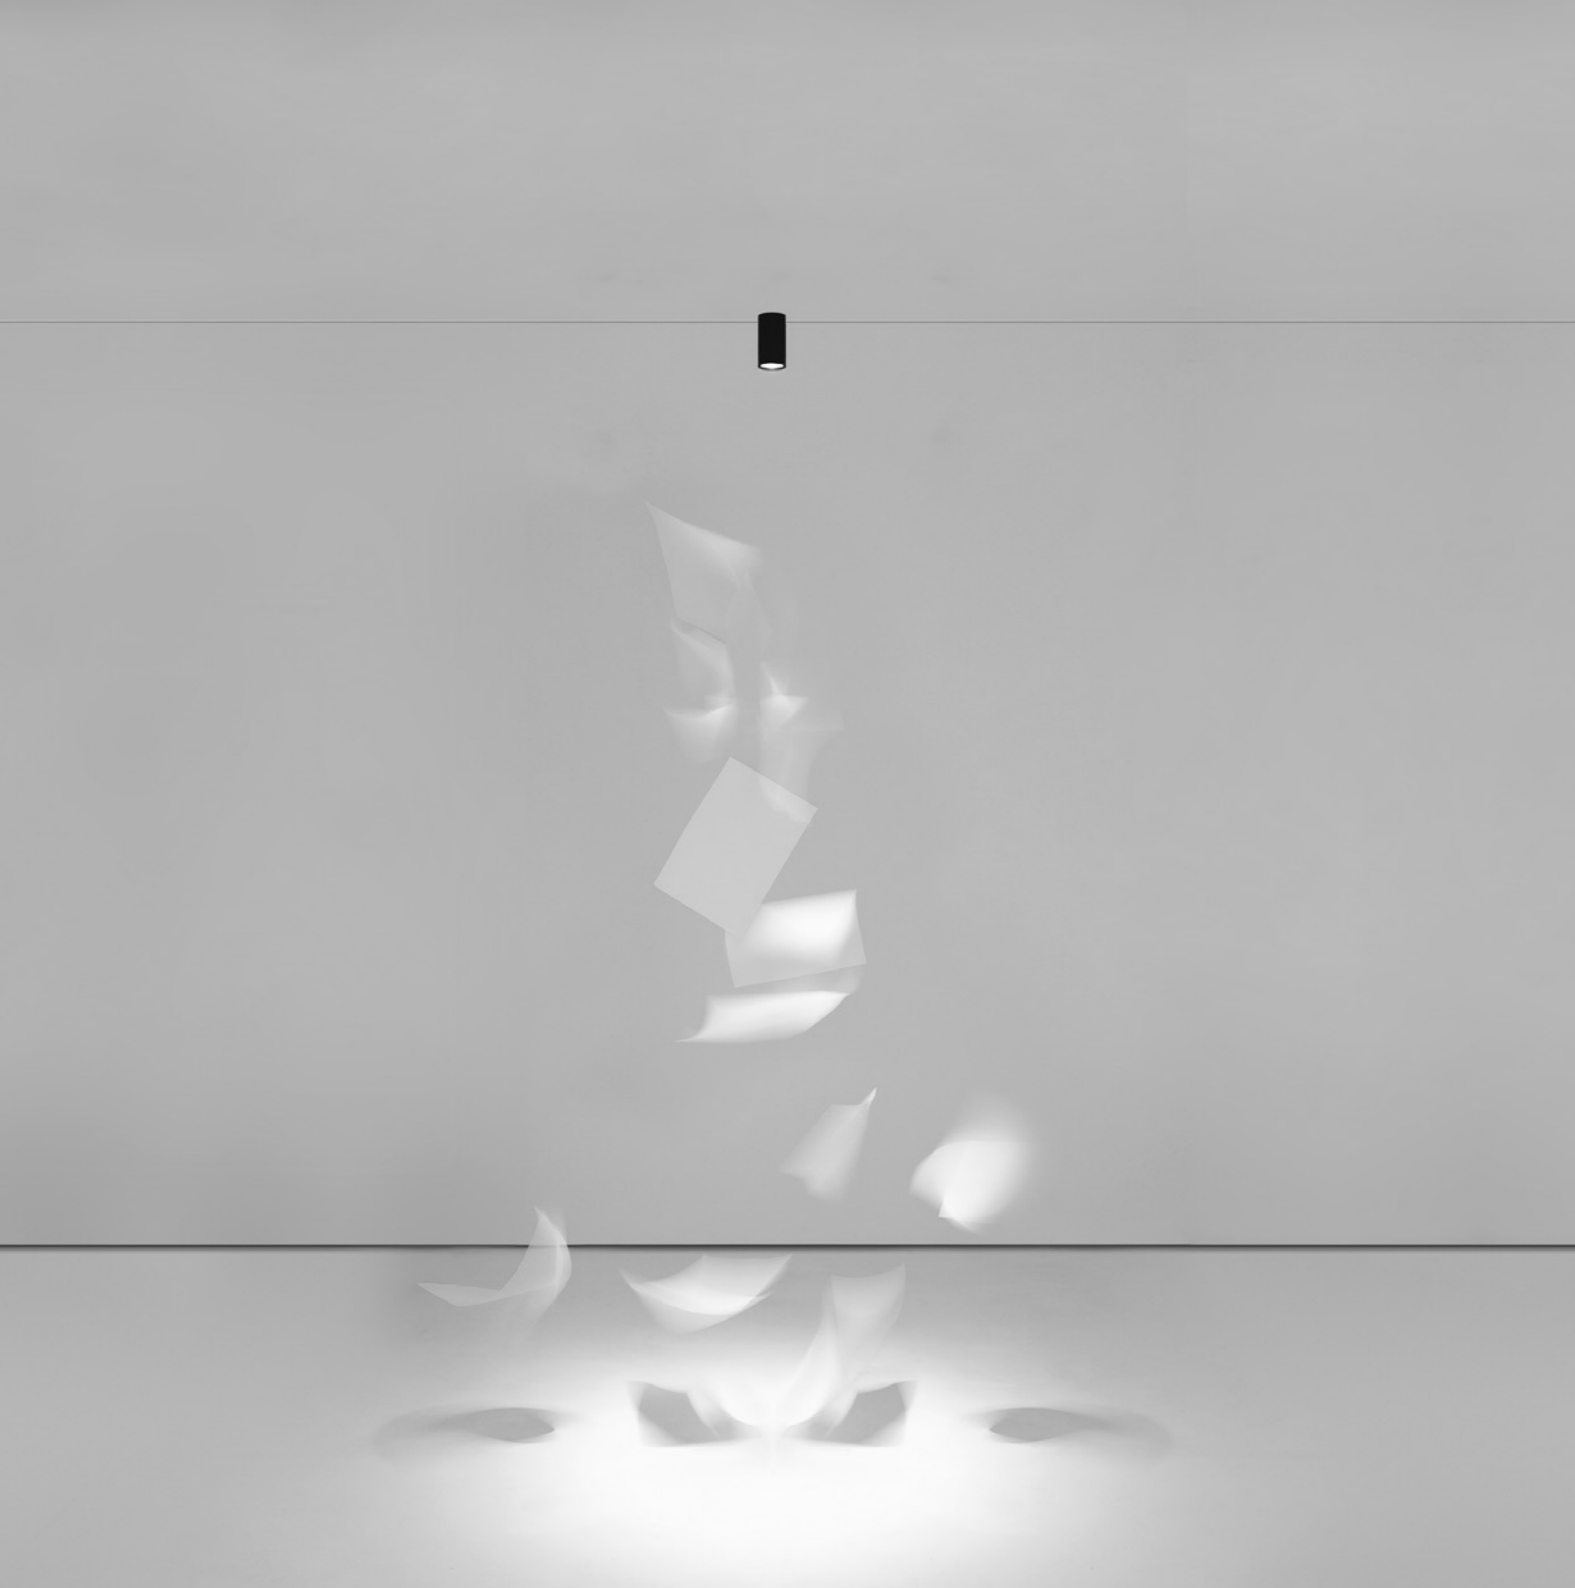

Light runs on a wire. An almost imperceptible wire, suspended in space.
Like a tightrope walker on a thin rope, the light reaches everywhere,
weightless and wonderful. Ohm is an electro mechanic project
that takes maximum advantage of the characteristics of luminous diodes.
Its secret is a special unipolar wire stretched from wall to wall. Where the light comes
from is discreetly hidden, giving all the attention to what it is illuminating.
It is possible to replace the light source even with the luminaire assembled.
Luminaire designed also to be powered by ENDLESS conductive tape.
Selection for ADI Design Index 2020


Remote driver version

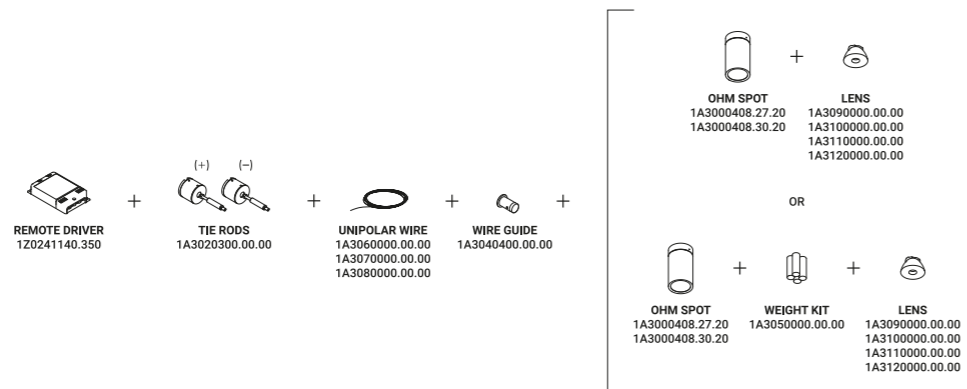

Systems / Direct / Indoor

Material Metal - PA
Finish .04 Matt Black

Note Special unipolar wire stretched from wall to wall. Max 4 Spots.




OHM SPOT
 3,2W
 Max 350mA DC
 2700K / 3000K
 CRI >95
 Driver not included

Matt Black - 2700K
 Matt Black - 3000K

1A3000408.27.20
 1A3000408.30.20

Compulsory accessories

Installation kits



Tie rods				Not included
Matt White	2 Pieces		1A3020300.00.00	



Unipolar wire - 12 m				Not included
	Max 60V DC		1A3060000.00.00	

Unipolar wire - 24 m				Not included
	Max 60V DC		1A3070000.00.00	

Unipolar wire - 48 m				Not included
	Max 60V DC		1A3080000.00.00	


Other accessories



Lens				Not included
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00	
	3000K - CRI >95 - 288lm			
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00	
	3000K - CRI >95 - 286lm			
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00	
	3000K - CRI >95 - 273lm			
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00	
	3000K - CRI >95 - 270lm			

Optional accessories

Installation kits



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls		1A3030300.00.00




Wire guide			Not included
Matt Black	1 Piece		1A3040400.00.00




Weight kit for suspension version			Not included
	4 Pieces		1A3050000.00.00


Drivers



Driver			Not included
220-240V(100-127V)	350mA/35W(35W)/IP20/DALI - PUSH - 1-10V		1Z0241140.350

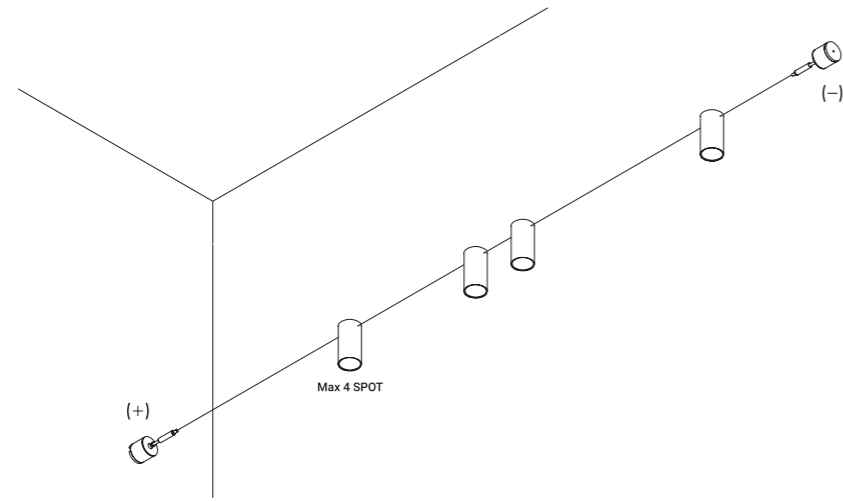

Remote driver version

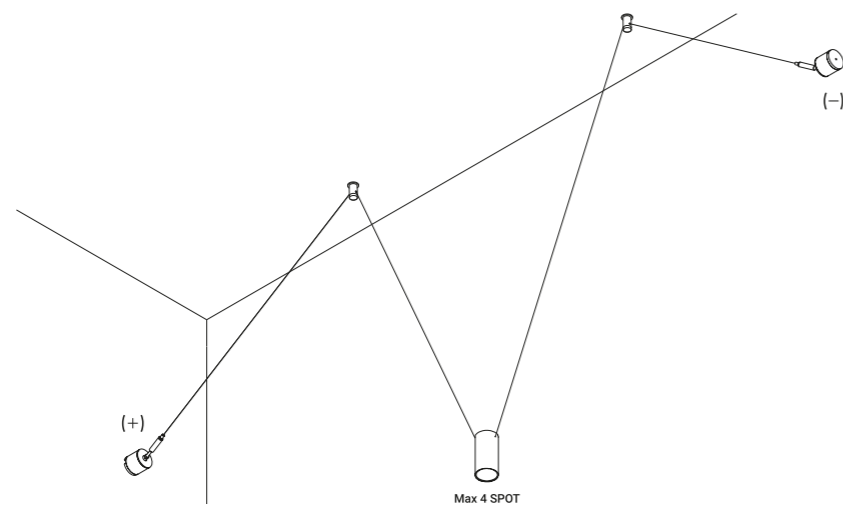

Suspension version






Utopia is a project on the limit state of light,
the research for the minimum dimension necessary for pure and essential lighting.
It represents full flexibility, in both its design and its light control.

The light strip reaches into space, bending,
breaking and drawing abstract, mysterious patterns.

Systems / Indirect / Indoor

Material Metal - PVC
Finish .00 Standard

Note Special stainless steel and rubber profile stretched from wall to wall.
 Available in 6 / 12 m with a single power unit and uniform lighting.

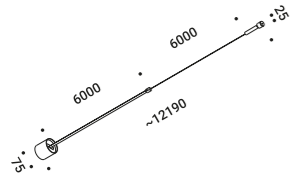


UTOPIA 6

79W
 24V DC
 2700K - 6079lm / 3000K - 6322lm
 CRI >90
 Driver not included
 IP20

Standard - 2700K
 Standard - 3000K

1A4250008.27.20
 1A4250008.30.20

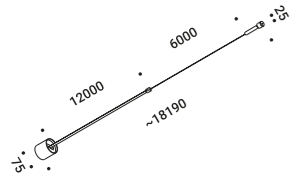

UTOPIA 12

125W
 24V DC
 2700K - 10133lm / 3000K - 10538lm
 CRI >90
 Driver not included
 IP20

Standard - 2700K
 Standard - 3000K


1A4600008.27.20
 1A4600008.30.20

Optional accessories

Installation kits




Accessory 1	Not included
Polished Chrome	1A4480100.00.00




Accessory 2	Not included
Polished Chrome	1A4490100.00.00


Drivers




Driver	Not included	
100-240V	24V/150W/IP67/1-10V	1Z1120500



Dimmable controller	Not included	
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034

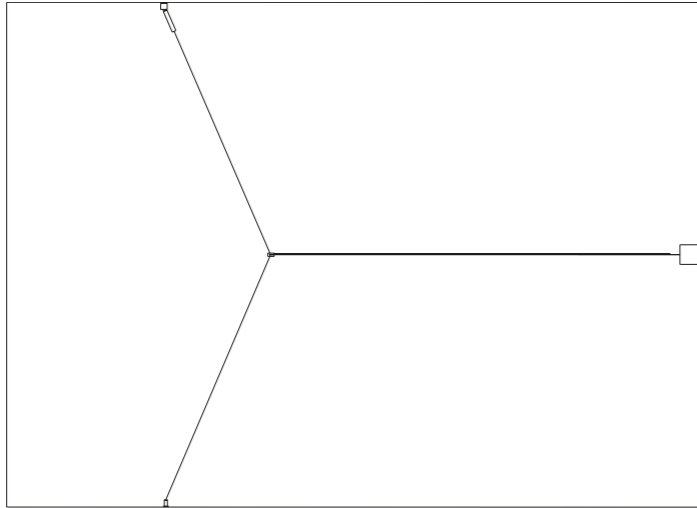

1A4480100.00.00 - Example of installation with accessory 1

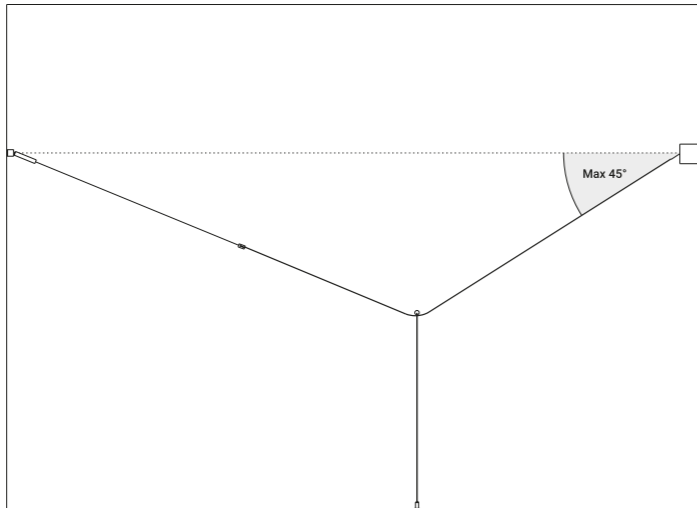

1A4490100.00.00 - Example of installation with accessory 2




TRACKS - PROFILES




Pure line in space.
Our Sistema track holds the light solution Dot.

Power right connector and power left connector installation

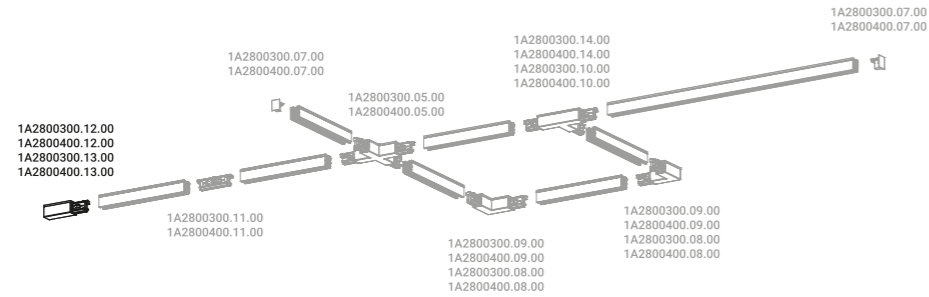

Power intermediate connector installation

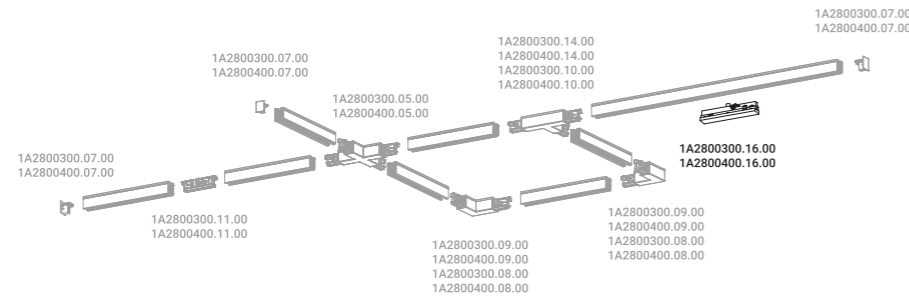

Systems / Direct / Indoor


Material Metal - Polycarbonate

Finish .03 Matt White .04 Matt Black

Note Ceiling and wall track system.

Compulsory accessories

Installation kits



Track 1 m		Not included
Matt White	1A2800300.01.00	
Matt Black	1A2800400.01.00	

Track 2 m		Not included
Matt White	1A2800300.02.00	
Matt Black	1A2800400.02.00	

Track 3 m		Not included
Matt White	1A2800300.03.00	
Matt Black	1A2800400.03.00	



End cap		Not included
Matt White	1A2800300.07.00	
Matt Black	1A2800400.07.00	

Connectors



Power right connector		Not included
Matt White	1A2800300.13.00	
Matt Black	1A2800400.13.00	



Power left connector		Not included
Matt White	1A2800300.12.00	
Matt Black	1A2800400.12.00	



Power intermediate connector		Not included
Matt White	1A2800300.16.00	
Matt Black	1A2800400.16.00	

Optional accessories

Installation kits



Linear connector		Not included
Matt White	1A2800300.11.00	
Matt Black	1A2800400.11.00	



Internal L connector		Not included
Matt White	1A2800300.09.00	
Matt Black	1A2800400.09.00	



External L connector		Not included
Matt White	1A2800300.08.00	
Matt Black	1A2800400.08.00	



Right T connector		Not included
Matt White	1A2800300.14.00	
Matt Black	1A2800400.14.00	



Left T connector		Not included
Matt White	1A2800300.10.00	
Matt Black	1A2800400.10.00	



X connector		Not included
Matt White	1A2800300.15.00	
Matt Black	1A2800400.15.00	



Adjustable suspension cable		Not included
Length 1500 mm	1A2800000.04.00	

Adjustable suspension cable		Not included
Length 3000 mm	1A2800000.05.00	

Adjustable suspension cable		Not included
Length 5000 mm	1A2800000.06.00	




Cutting tool		Not included
	1A2800300.17.00	



Optional accessories

Luminaires



DOT BINARIO 51

Max 10W
220V - 50Hz
ON/OFF
Bulb not included
IP20

Matt White - ON/OFF
Matt Black - ON/OFF

1A3710308.00.00
1A3710408.00.00

Optional accessories

Bulbs



LED - GU10 - PAR16

220-240V - 5,5W - 25°
3000K - 375lm - CRI >97
Energy Efficiency G - Dimmable

DOT BINARIO 51

1Y0330500

Not included



LED SORAA - GU10 - MR16

230V - 7,5W - 10°
2700K - 390lm - CRI >95
Energy Efficiency G - Dimmable

DOT BINARIO 51

1Y1580210

Not included



LED SORAA - GU10 - MR16


230V - 7,5W - 10°
3000K - 410lm - CRI >95
Energy Efficiency G - Dimmable

DOT BINARIO 51

1Y1580010

Not included

Other accessories




Darklight

LED SORAA - GU10 - MR16

DOT BINARIO 51

1Y1580040

Not included




25° beam filter

LED SORAA - GU10 - MR16

DOT BINARIO 51

1Y1580020

Not included



36° beam filter

LED SORAA - GU10 - MR16

DOT BINARIO 51

1Y1580030

Not included

OUTDOOR



BELLADINOTTE

Maurizio Mancini / 2012

The magic of the mirror brought into the garden.
A study of camouflage. The reflective surface is used as a tool
to camouflage and hide the machine to create light.
The reflection of the environment makes the luminaire invisible.


BELLADINOTTE

Maurizio Mancini / 2012

Floor-Outdoor / Indirect / Outdoor

Material Metal
Finish .00 Standard

Note Outdoor lamp with spike. Adjustable along the vertical axis. Plane with mirror finish. Matt green mirror finish rear plane. Black cable (5 m).



BELLADINOTTE

2x4,2W
 24V DC
 2700K - 262lm / 3000K - 282lm
 CRI >90
 Driver not included
 ◆ IP67

Standard - 2700K
 Standard - 3000K

1A3560008.27.20
 1A3560008.30.20


Optional accessories

Installation kits



Driver connector IP68		Not included
1 Piece	1A1660000.00.00	

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620





BUBKA


Daniele Sprega / 2014

A perfect tool to make outdoor light.
The light as a tool for guiding people along a path.

Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .00 Standard

Note Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (7 m).



BUBKA

8,4W
 Max 700mA DC
 2700K - 639lm / 3000K - 639lm
 CRI >90
 Driver not included
 IP65

Standard - 2700K
 Standard - 3000K


1A3600008.27.20
 1A3600008.30.20

Optional accessories

Installation kits




Driver connector IP68	Included
1 Piece	1A1660000.00.00




Anchoring bolt	Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm	1A3620000.00.00

Lighting modules



Additional LED head	Not included
Matt Black	Max 700mA DC - 8,4W 2700K - 350lm - CRI >90 1A3610408.27.20
	Max 700mA DC - 8,4W 3000K - 350lm - CRI >90 1A3610408.30.20

Drivers



Driver box	Not included
Input 110-240V - 50/60Hz Output 700mA - 20W - IP65 - DALI	1A3880008.700



BUBKA BOLLARD

Daniele Sprega / 2021

A perfect tool to make outdoor light.
The light as a tool for guiding people along a path.


BUBKA BOLLARD

Daniele Sprega / 2021

Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .00 Standard

Note Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L stainless steel stem. Black cable (9 m).



BUBKA BOLLARD

8,4W
 Max 700mA DC
 2700K - 350lm / 3000K - 350lm
 CRI >90
 Driver not included
 IP65

Standard - 2700K
 Standard - 3000K

1A1440008.27.20
 1A1440008.30.20

Daniele Sprega / 2021


BUBKA BOLLARD

Optional accessories

Installation kits




Driver connector IP68	Included
1 Piece	1A1660000.00.00




Anchoring bolt	Not included
Cut-out Ø 250 mm Minimum space for mounting 350 mm	1A3620000.00.00

Lighting modules



Additional LED head	Not included
Matt Black	Max 700mA DC - 8,4W 2700K - 350lm - CRI >90 1A3610408.27.20
	Max 700mA DC - 8,4W 3000K - 350lm - CRI >90 1A3610408.30.20

Drivers



Driver box	Not included
Input 110-240V - 50/60Hz Output 350mA - 17W - IP65 - DALI	1A3880008.350



BUIO

Maurici Ginés / 2023

A small black dot reveals its function only when necessary.
For us the secret of light lies not in its shape, or in some technical virtuosity,
but in the choice and assumption of a method,
the method of amazement and memory.

BUIO - TRIMLESS


Maurici Ginés / 2023

Recessed / Direct / Outdoor

Material

Finish .04 Matt Black

Note Outdoor luminaire. Available with transparent or black glass. Black cable (1 m).




BUJO TRIMLESS - 13°

Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5200408.27.20
1A5200408.30.20



BUJO TRIMLESS - 25°


Black filter
6,2W
24V DC
2700K - 150lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5220408.27.20
1A5220408.30.20

Maurici Ginés / 2023

BUIO - TRIMLESS




BUJO TRIMLESS - 32°

Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5210408.27.20
1A5210408.30.20




BUJO TRIMLESS ELLIPTICAL

Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5230408.27.20
1A5230408.30.20




BUIO TRIMLESS - 13°

Transparent filter
 6,2W
 24V DC
 2700K - 239lm / 3000K - 246lm
 CRI >90
 Beam 13°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5240408.27.20
 1A5240408.30.20




BUIO TRIMLESS - 25°

Transparent filter
 6,2W
 24V DC
 2700K - 300lm / 3000K - 309lm
 CRI >90
 Beam 25°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5260408.27.20
 1A5260408.30.20




BUIO TRIMLESS - 32°

Transparent filter
 6,2W
 24V DC
 2700K - 279lm / 3000K - 288lm
 CRI >90
 Beam 32°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5250408.27.20
 1A5250408.30.20



BUIO TRIMLESS ELLIPTICAL

Transparent filter
 6,2W
 24V DC
 2700K - 263lm / 3000K - 271lm
 CRI >90
 UGR <19
 Driver not included




Matt Black - 2700K
 Matt Black - 3000K

1A5270408.27.20
 1A5270408.30.20

Compulsory accessories

Installation kits




Installation box

Standard	1A5280000.00.00	Not included
----------	-----------------	--------------

Optional accessories

Drivers



Driver

110-240V	24V/25W/IP67/ON/OFF	1Z1120620	Not included
----------	---------------------	-----------	--------------

BUIO - TRIM


Maurici Ginés / 2023

Recessed / Direct / Outdoor

Material

Finish .04 Matt Black

Note Outdoor luminaire. Available with transparent or black glass. Black cable (1 m).




BUIO TRIM - 13°

Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5120408.27.20
1A5120408.30.20



BUIO TRIM - 25°


Black filter
6,2W
24V DC
2700K - 150lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5140408.27.20
1A5140408.30.20

Maurici Ginés / 2023

BUIO - TRIM




BUIO TRIM - 32°

Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5130408.27.20
1A5130408.30.20




BUIO TRIM ELLIPTICAL

Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5150408.27.20
1A5150408.30.20




BUIO TRIM - 13°

Transparent filter
6,2W
24V DC
2700K - 239lm / 3000K - 246lm
CRI >90
Beam 13°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5160408.27.20
1A5160408.30.20




BUIO TRIM - 25°

Transparent filter
6,2W
24V DC
2700K - 300lm / 3000K - 309lm
CRI >90
Beam 25°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5180408.27.20
1A5180408.30.20




BUIO TRIM - 32°

Transparent filter
6,2W
24V DC
2700K - 279lm / 3000K - 288lm
CRI >90
Beam 32°
UGR <19
Driver not included



Matt Black - 2700K
Matt Black - 3000K

1A5170408.27.20
1A5170408.30.20



BUIO TRIM ELLIPTICAL

Transparent filter
6,2W
24V DC
2700K - 263lm / 3000K - 271lm
CRI >90
UGR <19
Driver not included




Matt Black - 2700K
Matt Black - 3000K

1A5190408.27.20
1A5190408.30.20

Compulsory accessories

Installation kits




Installation box

Standard	1A5280000.00.00	Not included
----------	-----------------	--------------

Optional accessories

Drivers



Driver

110-240V	24V/25W/IP67/ON/OFF	1Z1120620	Not included
----------	---------------------	-----------	--------------

BUIO - SPOT

Maurici Ginés / 2023


Floor-Wall-Ceiling / Direct / Outdoor

Material

Finish .04 Matt Black

Note

Outdoor luminaire. Adjustable spike and wall versions. Available with transparent or black glass. AISI 316L stainless steel accessories for the spike and wall versions. Black cable (1 m).




BUIO - 13°

Black filter
6,2W
24V DC
2700K - 120lm / 3000K - 123lm
CRI >90
Beam 13°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5040408.27.20
1A5040408.30.20



BUIO - 25°


Black filter
6,2W
24V DC
2700K - 150lm / 3000K - 155lm
CRI >90
Beam 25°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5060408.27.20
1A5060408.30.20

Maurici Ginés / 2023

BUIO - SPOT




BUIO - 32°

Black filter
6,2W
24V DC
2700K - 140lm / 3000K - 144lm
CRI >90
Beam 32°
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5050408.27.20
1A5050408.30.20




BUIO ELLIPTICAL

Black filter
6,2W
24V DC
2700K - 132lm / 3000K - 136lm
CRI >90
UGR <19
Driver not included
IP67

Matt Black - 2700K
Matt Black - 3000K

1A5070408.27.20
1A5070408.30.20




BUIO - 13°

Transparent filter
 6,2W
 24V DC
 2700K - 239lm / 3000K - 246lm
 CRI >90
 Beam 13°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5080408.27.20
 1A5080408.30.20




BUIO - 25°

Transparent filter
 6,2W
 24V DC
 2700K - 300lm / 3000K - 309lm
 CRI >90
 Beam 25°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5100408.27.20
 1A5100408.30.20




BUIO - 32°

Transparent filter
 6,2W
 24V DC
 2700K - 279lm / 3000K - 288lm
 CRI >90
 Beam 32°
 UGR <19
 Driver not included



Matt Black - 2700K
 Matt Black - 3000K

1A5090408.27.20
 1A5090408.30.20



BUIO ELLIPTICAL

Transparent filter
 6,2W
 24V DC
 2700K - 263lm / 3000K - 271lm
 CRI >90
 UGR <19
 Driver not included




Matt Black - 2700K
 Matt Black - 3000K


1A5110408.27.20
 1A5110408.30.20

Compulsory accessories


Installation kits




Wall bracket		Not included
Stainless Steel	Brushed INOX	1A4431000.00.00



Ceiling rose		Not included
Matt Black	Brushed INOX	1A4441000.00.00




Earth spike		Not included
Stainless Steel	Brushed INOX	1A4451000.00.00



Tree strap		Not included
Standard	Length 1 m	1A4590000.00.00

Optional accessories

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620



GRILLO

Daniele Sprega / 2012




A small luminous elf that you can install in your garden or inside a vase.
A thin stem stuck into the ground and a little adjustable LED projector.
For illuminating a flower, a plant or simply to accompany us along a path.
Lamp with spike.

Floor-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .04 Matt Black

Note Outdoor lamp with spike. Adjustable in all directions. AISI 316L stainless steel stem. Black cable (5 m).

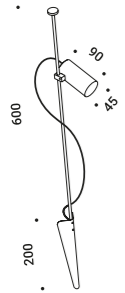

GRILLO

4,2W
 24V DC
 2700K - 262lm / 3000K - 282lm
 CRI >90
 Driver not included
 IP67

Matt Black - 2700K
 Matt Black - 3000K

1A3570408.27.20
 1A3570408.30.20

Optional accessories

Installation kits



Driver connector IP68		Included
1 Piece		1A1660000.00.00




Additional stem 1 m		Not included
Standard	AISI 316L stainless steel	1A3590000.00.00

Lighting modules



Additional LED head		Not included
Matt Black	24V DC - 4,2W 2700K - 262lm - CRI>90	1A3580408.27.20
	24V DC - 4,2W 3000K - 282lm - CRI>90	1A3580408.30.20

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620




Light has found a home.
A lamp designed to welcome, illuminating the entrance.

Wall-Outdoor / Direct / Outdoor

Material Metal
 Finish .00 Standard

Note Outdoor wall luminaire. Matt black body and matt red top cover. Red hole light.



IMU
 5,5W
 Max 350mA DC
 3000K - 306lm
 CRI >80
 Driver not included
 IP65

Standard - 3000K

1A3550008.30.20


Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00

Drivers



Driver box	Not included
Input 110-240V - 50/60Hz Output 350mA - 17W - IP65 - DALI	1A3880008.350





NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

The idea is to bring light wherever you like.
A simple project: a cable and a LED.
Indoor version also available.


NEURO OUTDOOR

Davide Groppi - Beppe Merlano / 2022

Suspension-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal
Finish .04 Matt Black .32 Copper Oxide

Note Outdoor suspension luminaire. Black cable (10 m).



NEURO OUTDOOR

3,2W
 24V DC
 2700K - 262lm / 3000K - 282lm
 CRI >90
 Driver not included
 IP67

Matt Black - 2700K
 Matt Black - 3000K
 Copper Oxide - 2700K
 Copper Oxide - 3000K

1A4030408.27.20
 1A4030408.30.20
 1A4033208.27.20
 1A4033208.30.20


Optional accessories

Installation kits



Driver connector IP68		Included
1 Piece	1A1660000.00.00	

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620





NUIT


Maurici Ginés / 2023

Night has always been a source of inspiration.
We walk, and we are not alone.
Nuit is a small travel companion that draws our night-time journeys.

Outdoor-Recessed / Diffuse / Indoor-Outdoor

Material	Metal		
Finish	.03 Matt White	.27 Gravity Black	.38 Blasted Inox

Note Outdoor recessed luminaire. Minimum space for recessed installation: 55 mm.



NUIT


1W
24V DC
2700K - 45lm / 3000K - 50lm
CRI >90
Driver not included
◆ IP65

Matt White - 2700K
Matt White - 3000K
Gravity Black - 2700K
Gravity Black - 3000K
Blasted Inox - 2700K
Blasted Inox - 3000K

1A1320308.27.20
1A1320308.30.20
1A1322708.27.20
1A1322708.30.20
1A1323808.27.20
1A1323808.30.20

Compulsory accessories

Installation kits



Concrete box	Not included
Standard	1A4460000.00.00

Optional accessories

Installation kits




Plasterboard frame 12,5 mm	Not included
Matt White	Cut-out 100x100 mm Minimum space for mounting 120 mm 1A4470300.00.00



Adapter plasterboard 25 mm	Not included
Standard	1A5030000.00.00

Drivers



Driver	Not included
110-240V	24V/25W/IP67/ON/OFF 1Z1120620



ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

From the Latin "origo", start, birth, source. It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner. Mysterious, enigmatic but comfortable, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.

Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating.

Indoor version also available.

**AZ Award 2021 and People's Choice
Archiproducts Design Award 2020**


ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

Outdoor-Floor / Indirect / Outdoor

Material Glass fiber - Metal
Finish .04 Matt Black

Note Outdoor floor luminaire. Black cable (5 m).

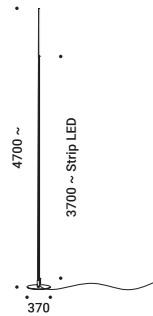

ORIGINE OUTDOOR

35W
 24V DC
 2700K - 2872lm / 3000K - 2930lm
 CRI >80
 Driver not included
 ◆ IP65

Matt Black - 2700K
 Matt Black - 3000K

1A2480408.27.20
 1A2480408.30.20


Optional accessories

Installation kits



Driver connector IP68		Included
1 Piece	1A1660000.00.00	

Drivers



Driver		Not included
100-240V	24V/60W/IP67/1-10V	1Z1120260





Q²

Alberto Zattin / 2006


A piece of architecture to be used in space.
A concrete cube that allows you to understand volumes and architecture
in an unusual and sometimes unprecedented way.
Indoor version also available.

Floor-Outdoor / Direct / Outdoor

Material Cement - Metal

Finish .00 Standard

Note Outdoor floor luminaire. Concrete body. Black cable (2,5 m).



Q²
 20W
 Max 500mA DC
 3000K - 2058lm
 CRI >90
 Driver not included
 ◆ IP67

Standard - 3000K

| 1A1150008.30.20 |


Optional accessories

Installation kits




Driver connector IP68	Included
1 Piece	1A1660000.00.00

Drivers



Driver box	Not included
Input 110-240V - 50/60Hz Output 500mA - 17W - IP65 - DALI	1A3880008.500

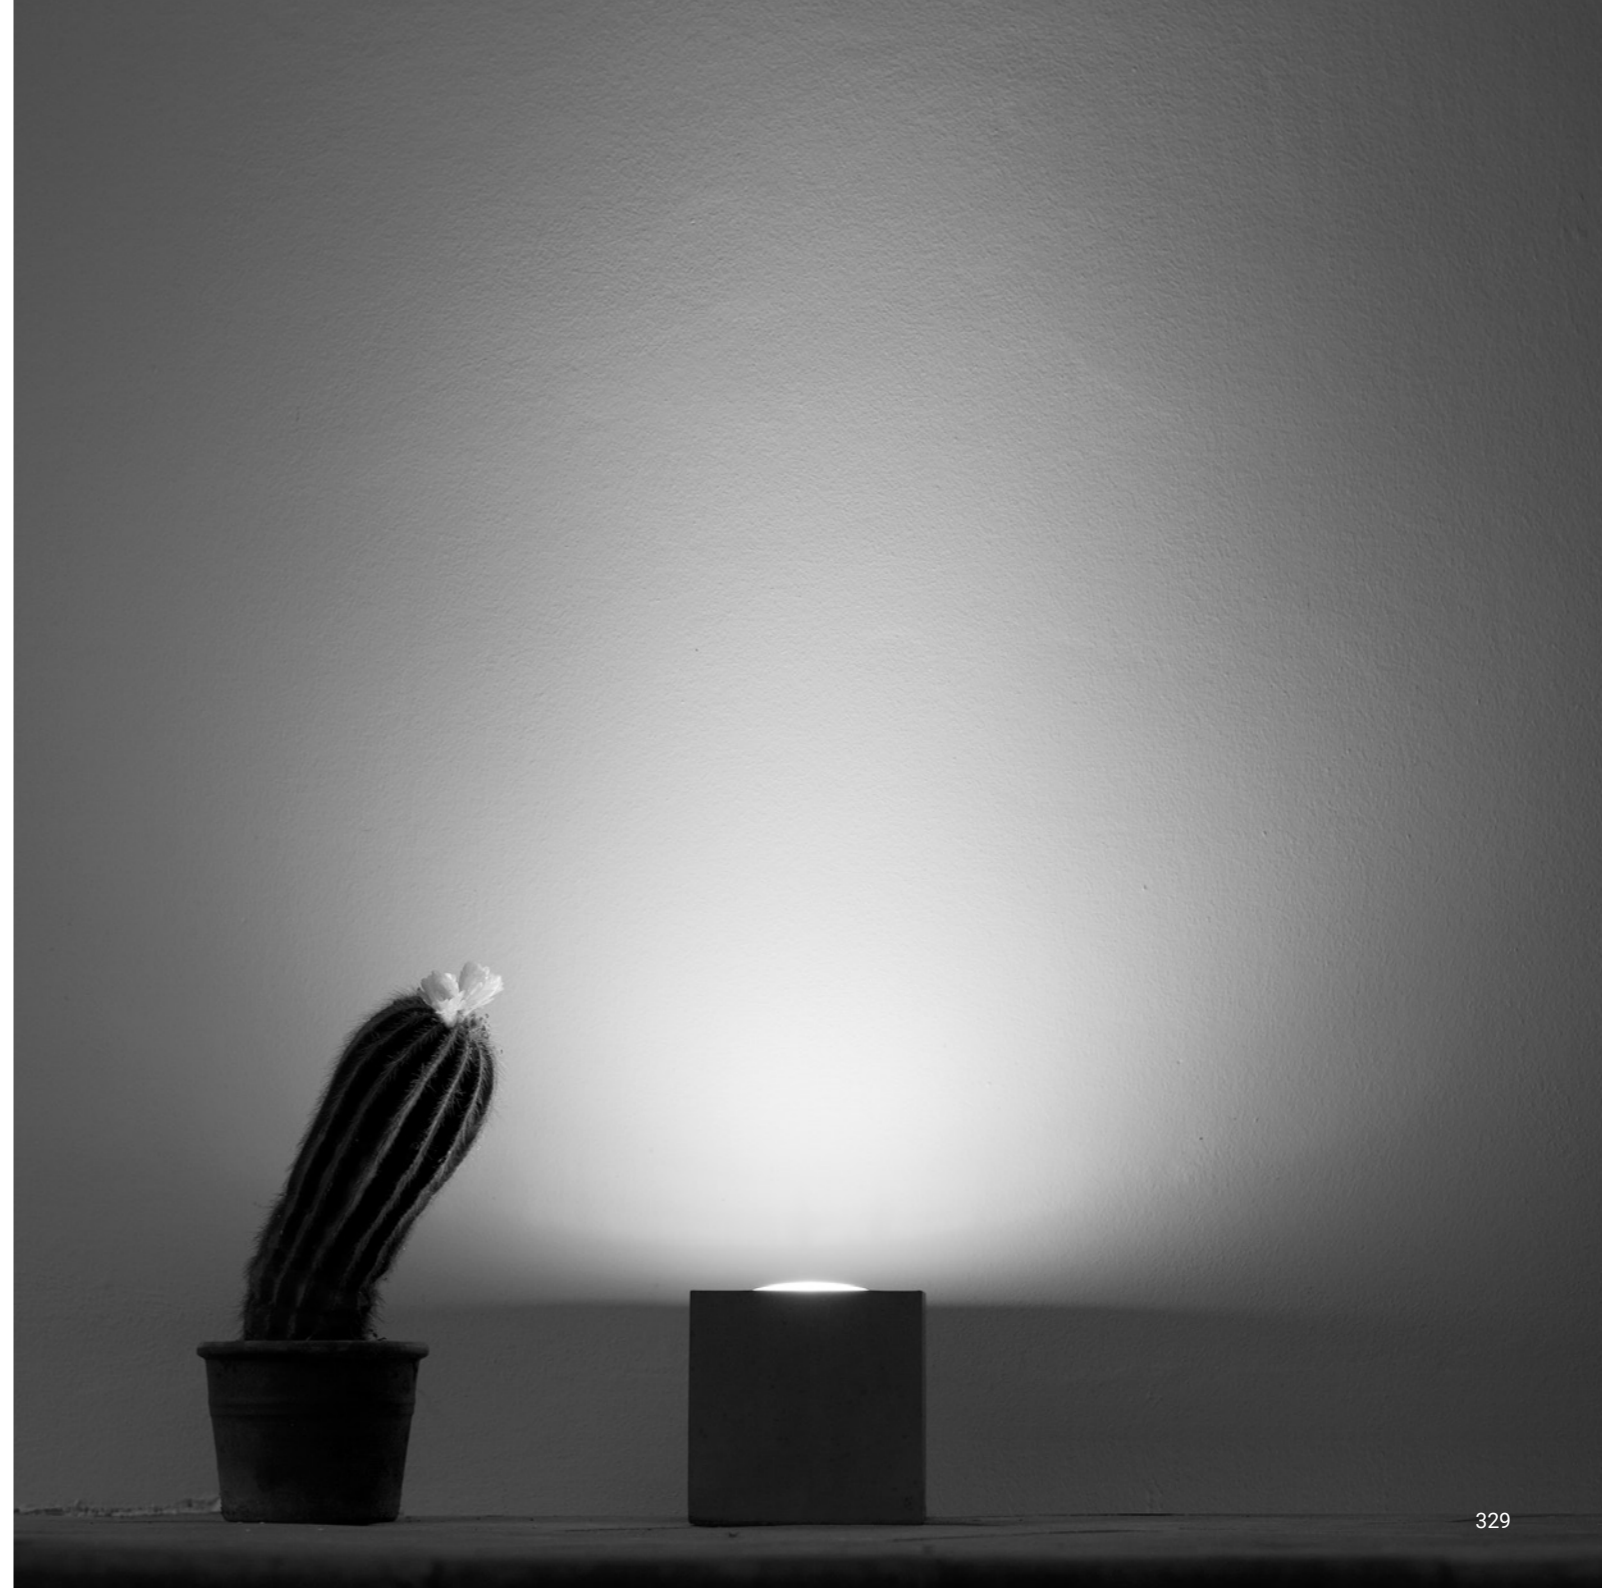

SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011



A special project, an authentic ready-made.
Obtained from a fishing flexible rod, it is a delicate and elegant sign,
which brings to mind the subtle branches of a willow tree
or bamboo canes floating on a light breeze.
Sampei is an unexpected gift, it is the magic of looking up, using light as a hook,
and being amazed by so much weightlessness.
Indoor version also available.

Compasso d'Oro ADI
Award 2014




SAMPEI 440 OUTDOOR

Enzo Calabrese - Davide Groppi / 2011

Floor-Outdoor / Direct / Outdoor

Material Glass fiber - Metal
Finish .03 Matt White .04 Matt Black

Note Outdoor floor luminaire. Adjustable in all directions. Black cable (5 m).

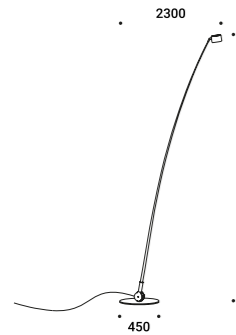

SAMPEI 440 OUTDOOR

8,4W
 Max 700mA DC
 2700K - 639lm / 3000K - 639lm
 CRI >90
 Driver not included
 IP65

Matt White - 2700K
 Matt White - 3000K
 Matt Black - 2700K
 Matt Black - 3000K

1A3770308.27.20
 1A3770308.30.20
 1A3770408.27.20
 1A3770408.30.20


Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00







Drivers














Driver box	Not included
Input 110-240V - 50/60Hz Output 700mA - 20W - IP65 - DALI	1A3880008.700











BULBS





	Socket	Voltage	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	E27	220-240V	9,5W	25°	3000K	760lm	>80	F	X	1Y0330730
	E27	220-240V	11,2W	360°	2700K	1521lm	>90	D	X	1Y0330790
	E27	220-240V	20W	200°	2700K	2452lm	>80	E	X	1Y2160020
	GU10	220-240V	5,5W	25°	3000K	375lm	>97	G	X	1Y0330500
	GU10	230V	7,5W	10°	2700K	390lm	>95	G	X	1Y1580210
	GU10	230V	7,5W	10°	3000K	410lm	>95	G	X	1Y1580010

	Power	Input	Output	Dimming	Protection	Code
	60W(40W)	220-240V(100-127V)	1000mA	DALI	IP20	1Z0241140.1000
	20W	100-240V	12V	1-10V	IP20	1Z0240900
	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
	22W(12W)	220-240V(100-127V)	24V	ON/OFF	IP20	1Z0240410
	22W(12W)	220-240V(100-127V)	24V	TRIAC/IGBT	IP20	1Z0240410 + 1Z0000034
	13,5W(13,5W)	220-240V(110-127V)	250mA	DALI - PUSH - 1-10V	IP20	1Z0241270.250
	18W	220-240V	350mA	TRIAC/IGBT	IP20	1Z0240740
	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0240860.350
	18W(15W)	220-240V(100-127V)	350mA	PUSH	IP20	1Z0240840.350
	35W(35W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0241140.350

DRIVERS


	Power	Input	Output	Dimming	Protection	Code
	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0240860.500
	20W(15W)	220-240V(100-127V)	500mA	PUSH	IP20	1Z0240840.500
	35W(35W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241140.500
	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.500
	150W	100-240V	24V	1-10V	IP67	1Z1120500
	60W	100-240V	24V	1-10V	IP67	1Z1120260
	96W	100-240V	24V	1-10V	IP67	1Z1120540
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620

COMMON ACCESSORIES

	Size	Cut-out	Finish	Code
Plasterboard trapdoors / Botole in cartongesso				
	200x200 mm	205x205 mm	Standard	1A3780000.00.00
	400x400 mm	415x415 mm	Standard	1A3790000.00.00
Clamp / Bloccacavo				
	Ø 50x20 mm		Matt White	1A3270300.00.00
			Matt Black	1A3270400.00.00
Driver connector IP68 / Connettore driver IP68				
			Standard	1A1660000.00.00

SUSPENSION KITS

Recessed suspension kit

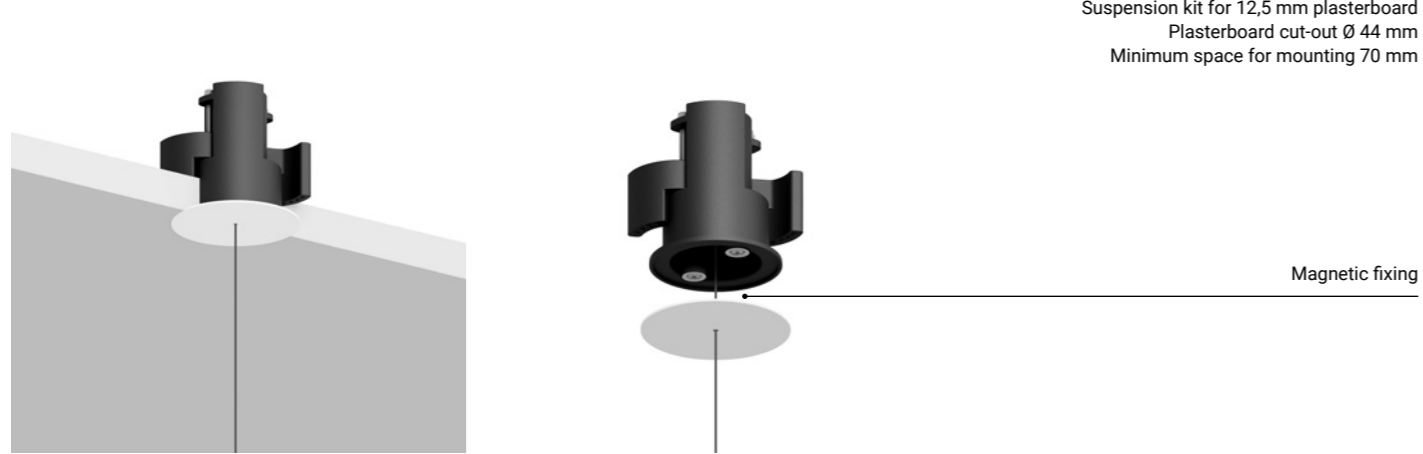


Version	Use	Product reference	Finish	Code
Recessed suspension kit.01	For suspension cables	REFLEX S 2	Matt White	1X0000300.01.00
		SHANGHAI 1		
Recessed suspension kit.02	For electrical cables	SHANGHAI 2	Matt Black	1X0000400.01.00
		SOTTILE 2		
Recessed suspension kit.03	For suspension cables	SOTTILE 2 DE	Matt White	1X0000300.02.00
		MAGIA	Matt Black	1X0000400.02.00
Recessed suspension kit.04	For electrical cables	MASAI 1	Matt White	1X0000300.03.00
		MASAI 2	Matt Black	1X0000400.03.00
Recessed suspension kit.05	For suspension cables	ASINTOTO	Matt White	1X0000300.04.00
		REFLEX S 2		
Recessed suspension kit.06	For electrical cables	SHANGHAI 2	Matt Black	1X0000400.04.00
		SOTTILE 2		
Recessed suspension kit.07	For suspension cables	SOTTILE 2 DE	Matt White	1X0000300.05.00
		LOUIS XIV 2	Matt Black	1X0000400.05.00
Recessed suspension kit.08	For electrical cables	SOTTOSOPRA 2		




SUSPENSION KITS

Ceiling suspension kit

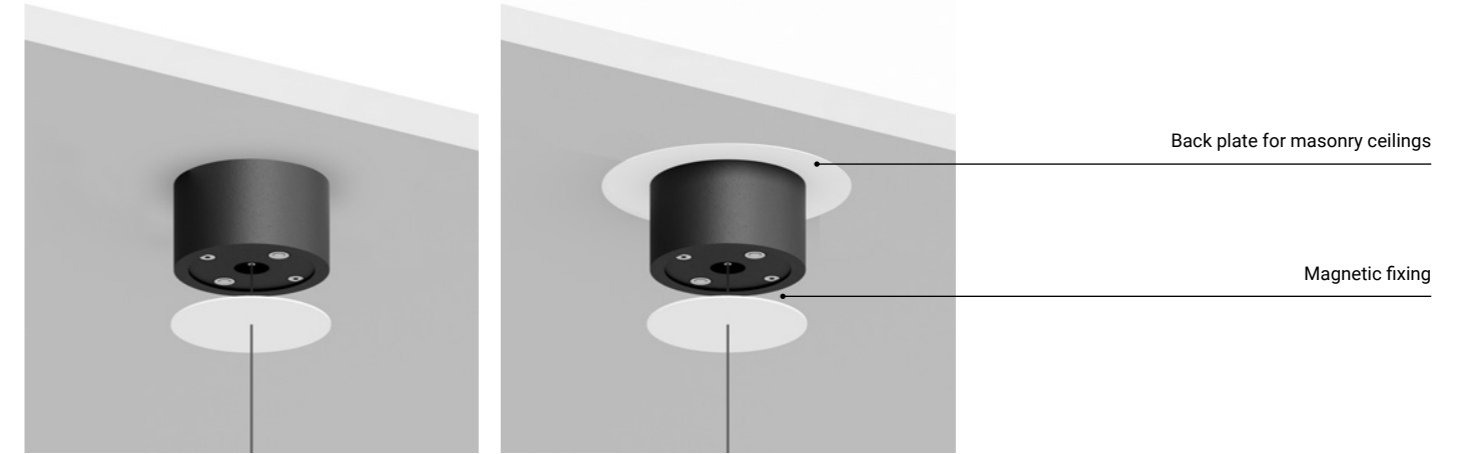

Version	Use	Product reference	Finish	Code
Ceiling suspension kit.01	For suspension cables	REFLEX S 2	Matt White	1X0010300.01.00
		SHANGHAI 1		
Ceiling suspension kit.02	For electrical cables	SHANGHAI 2	Matt Black	1X0010400.01.00
		SOTTILE 2		
Ceiling suspension kit.03	For suspension cables	SOTTILE 2 DE	Matt White	1X0010300.02.00
		MAGIA	Matt Black	1X0010400.02.00
Ceiling suspension kit.04	For electrical cables	MASAI 1	Matt White	1X0010300.03.00
		MASAI 2	Matt Black	1X0010400.03.00
Ceiling suspension kit.05	For suspension cables	ASINTOTO	Matt White	1X0010300.04.00
		REFLEX S 2		
Ceiling suspension kit.06	For electrical cables	SHANGHAI 2	Matt Black	1X0010400.04.00
		SOTTILE 2		
Ceiling suspension kit.07	For suspension cables	SOTTILE 2 DE	Matt White	1X0010300.05.00
		LOUIS XIV 2	Matt Black	1X0010400.05.00
Ceiling suspension kit.08	For electrical cables	SOTTOSOPRA 2		
Back plate	For masonry ceilings		Matt White	1X0050300.01.00



davidegroppi.com

Davide Groppi s.r.l.
Via Belizzi 20 / 22
29122 Piacenza - Italia
+39.0523.571590
info@davidegroppi.com

Davide Groppi s.r.l. © 2024
Company with sole shareholder under the direction and coordination of Dexelance